

**Product category:** (TLD) TRAKLOC Deflection Stud  
**Product name:** 362TLD125-24 57ksi G40 - Punched  
 3-5/8" TRAKLOC Stud 24 mils (20ga EQ)  
 Coating: G40  
 Color coding: Pink

### Geometric Properties

|                  |           |                   |             |
|------------------|-----------|-------------------|-------------|
| Web depth        | 3.625 in  | Weight            | 0.554 lb/ft |
| Flange width     | 1.250 in  | Punchout width    | 1.500 in    |
| Stiffening lip   | 0.288 in  | Punchout length   | 4.000 in    |
| Design thickness | 0.0250 in | Minimum thickness | 0.0238 in   |
| Yield stress, Fy | 57 ksi    |                   |             |

### Gross Section Properties of Full Section, Strong Axis

|                               |                       |
|-------------------------------|-----------------------|
| Cross sectional area (A)      | 0.163 in <sup>2</sup> |
| Moment of inertia (Ix)        | 0.327 in <sup>4</sup> |
| Radius of gyration (Rx)       | 1.416 in              |
| Gross moment of inertia (Iy)  | 0.033 in <sup>4</sup> |
| Gross radius of gyration (Ry) | 0.448 in              |

### Effective Section Properties, Strong Axis

|  |                       |
|--|-----------------------|
| Effective area (Ae)                                    | 0.067 in <sup>2</sup> |
| Moment of inertia for deflection (Ixe)                 | 0.306 in <sup>4</sup> |
| Section modulus (Sxe)                                  | 0.109 in <sup>3</sup> |
| Allowable bending moment - Local buckling (Mal)        | 3710 in-lbs           |
| Allowable bending moment - Distortional buckling (Mad) | 3986 in-lbs           |
| Allowable shear force in web (Unpunched) (Vag)         | 402 lb                |
| Allowable shear force in web (Punched) (Vanet)         | 292 lb                |

### Torsional Properties

|   |                        |
|---|------------------------|
| St. Venant torsion constant (J x 1000)          | 0.0339 in <sup>4</sup> |
| Warping constant (Cw)                           | 0.088 in <sup>6</sup>  |
| Distance from shear center to neutral axis (Xo) | -0.866 in              |
| Radii of gyration (Ro)                          | 1.719 in               |
| Torsional flexural constant (Beta)              | 0.746                  |

|                              |         |
|------------------------------|---------|
| Stud/track end reaction (Rx) | 107 lbs |
| Unbraced Length (Lu)         | 23.5 in |

### Notes:

- Calculated properties are based on AISI S100-07 w/ S2-10 Supplement and AISI S100-12, North American Specification for Design of Cold-Formed Steel Structural Members.
- Gross and torsional properties are based on full-unreduced cross section of the studs, away from punch-outs.
- The allowable moment based on local buckling (Mal) is based on the compression flange continuously braced.
- The distortional buckling moment (Mad) does not consider the beneficial effect of sheathing to rotational stiffness.
- For deflection calculations, use the effective moment of inertia.
- Stud/Track End Reaction (Rx) is the maximum end reaction (web crippling) capacity based on a minimum bearing length of 1 inch.
- East Coast Punch Pattern: Center of knockouts are 12" from the leading edge then 48" o.c.
- West Coast Punch Pattern: Center of knockouts are 24" from the leading edge then 24" o.c.


### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

### 09.22.16 (Non-Structural Metal Framing)

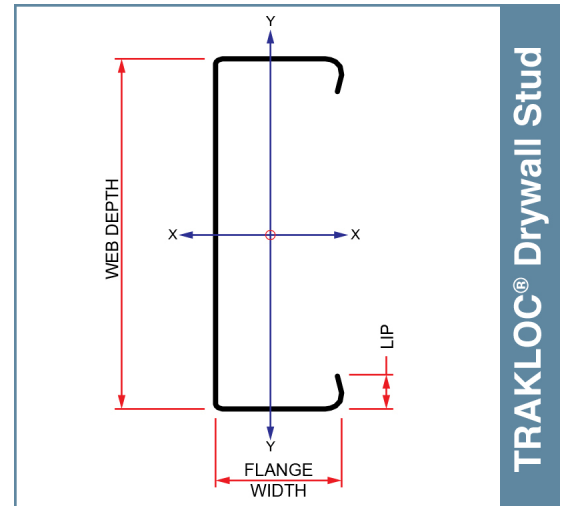

### ASTM & Code Standards:

- AISI-NASPEC 2007 w/S2-10
- Meets or exceeds ASTM C645
- SDS & Product Certification Information available at [www.clarkdietrich.com](http://www.clarkdietrich.com)



### Project Information

Name:  
Address:

### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

### Architect Information

Name:  
Contact:  
Phone:  
Fax:

**Product category:** (TLD) TRAKLOC Deflection Stud  
**Product name:** 362TLD125-24 57ksi G40 - Punched  
 3-5/8" TRAKLOC Stud 24 mils (20ga EQ)

### 3-5/8" TRAKLOC Stud 24 mils (20ga EQ) Drywall Stud - COMPOSITE Limiting Heights (AC86-2012)

#### (1 layer) 5/8" Type X Gypsum Board

| Spacing<br>(inches) | 5 psf   |        |        | 7.5 psf |        |        | 10 psf               |        |        |
|---------------------|---------|--------|--------|---------|--------|--------|----------------------|--------|--------|
|                     | L/120   | L/240  | L/360  | L/120   | L/240  | L/360  | L/120                | L/240  | L/360  |
| 12                  | 24'-1"  | 19'-1" | 16'-8" | 21'-0"  | 16'-8" | 14'-7" | 19'-1"               | 15'-2" | 13'-3" |
| 16                  | 21'-10" | 17'-4" | 15'-2" | 19'-1"  | 15'-2" | 13'-3" | 17'-4"               | 13'-9" | 12'-0" |
| 24                  | 19'-1"  | 15'-2" | 13'-3" | 16'-8"  | 13'-3" | 11'-6" | 14'-11" <sup>f</sup> | 12'-0" | 10'-4" |

**Composite Table Notes:**


- Allowable composite limiting heights were determined in accordance with ICC-ES AC86-2012.
- Additional composite wall testing and analysis requirements of the SFIA Code Compliance Certification Program were observed.
- In accordance with current building codes and AISI design standards, the 1/3 Stress Increase for strength was not used.
- The composite limiting heights provided in the tables are based on a single layer of 5/8" Type X Gypsum Board complying with ASTM C1396 and from the following manufacturers: American Gypsum, CertainTeed, Georgia Pacific, Continental, National Gypsum or USG.
- The gypsum board must be applied full height in the vertical orientation to each stud flange and installed in accordance with ASTM C754 using minimum No. 6 Type S fine thread Drywall bugle head screws spaced as listed below:
  - Screws spaced a maximum of 16 inch on-center to framing members spaced at 12 inch on-center.
  - Screws spaced a maximum of 12 inch on-center to framing members spaced at 16inch or 24 inch on-center.
  - Screws spaced 16 inch on-center to the top and bottom track.
- No fasteners are required for attaching the stud to the track except as detailed in ASTM C754.
- Stud end bearing must be a minimum of 1 inch.
- The minimum overlap of the TSO (Outer Stud) and TSE (Inner Stud) must be 8 inches and the maximum un-lapped length of the TSE must be 4 inches.
- f: Adjacent to the height value indicates that flexural stress controls the allowable wall height.
- s: Adjacent to the height value indicates that shear/end reaction controls the allowable wall height.

### 3-5/8" TRAKLOC Stud 24 mils (20ga EQ) Drywall Stud - NON-COMPOSITE Limiting Heights (FULLY BRACED)

| Spacing<br>(inches) | 5 psf  |         |         | 7.5 psf |        |         | 10 psf              |                     |        |
|---------------------|--------|---------|---------|---------|--------|---------|---------------------|---------------------|--------|
|                     | L/120  | L/240   | L/360   | L/120   | L/240  | L/360   | L/120               | L/240               | L/360  |
| 12                  | 20'-0" | 15'-11" | 13'-11" | 18'-2"  | 15'-8" | 13'-8"  | 15'-9"              | 14'-3"              | 12'-5" |
| 16                  | 18'-2" | 14'-5"  | 12'-7"  | 15'-9"  | 14'-3" | 12'-5"  | 13'-7"              | 12'-11"             | 11'-3" |
| 24                  | 15'-9" | 12'-7"  | 11'-0"  | 12'-10" | 12'-5" | 10'-10" | 11'-1" <sup>e</sup> | 11'-1" <sup>e</sup> | 9'-10" |

**Non-Composite Table Notes:**

- Heights are based on AISI S100-07 w/S2-10 Supplement, and AISI S100-12 Specification using steel properties alone.
- Compression flange must be continuously braced.
- End bearing must be 1 inch.
- The minimum overlap of the TSO (Outer Stud) and TSE (Inner Stud) must be 8 inches and the maximum un-lapped length of the TSE must be 4 inches.
- e: Web stiffeners are required at the stud/track connection.

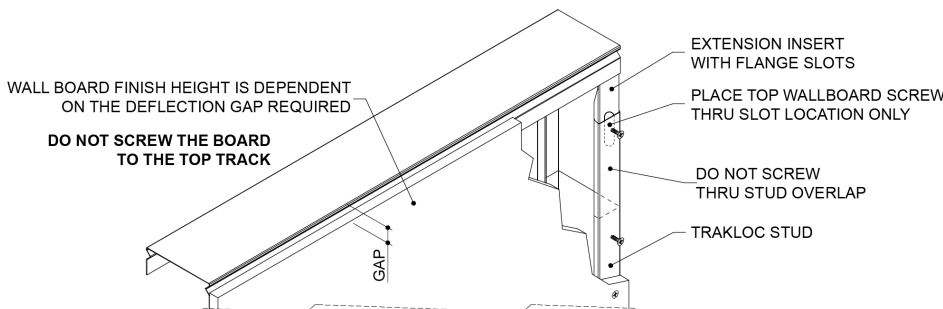

**Project Information**

Name:  
Address:

**Contractor Information**

Name:  
Contact:  
Phone:  
Fax:

**Architect Information**

Name:  
Contact:  
Phone:  
Fax: