

TradeReady® Rim Track

Product category 11-1/4" 12ga TradeReady Rim Track with preformed tabs
 Product name 1125TD250-97 (50ksi) - w/ tabs
 Finish CP60

Geometric Properties

Inside Web depth	11.250 in	Design thickness	0.1017 in
Top leg width	1.250 in	Min. steel thickness	0.0966 in
Bottom leg width	2.500 in	Yield stress, Fy	50 ksi
Tab depth	6.000 in	Ultimate, Fu	65 ksi

Gross Section Properties of Full Section

Cross sectional area (A)	1.510 in ⁽²⁾
Member weight per foot of length	4.941 lbs/ft
Moment of inertia (Ix)	23.508 in ⁽⁴⁾
Section modulus (Sx)	3.789 in ⁽³⁾
Gross moment of inertia (Iy)	0.463 in ⁽⁴⁾
Section modulus (Sy)	0.210 in ⁽³⁾

Net Section Properties (at tab)

Cross sectional area (A)	0.900 in ⁽²⁾
Moment of inertia (Ix)	21.444 in ⁽⁴⁾

Capacity at Tab Hole

Fully Braced Allowable Moment @ Hole when Small Flange is in Compression (Mpos)	75860 in-lbs
Fully Braced Allowable Moment @ Hole when Large Flange is in Compression (Mneg)	82560 in-lbs
Allowable Shear at Tab Hole (Va)	4689 lbs

Torsional Section Properties:

Distance between centroid and shear-center (Xo)	-0.551 in
Distance between centroid and web-centerline (X)	0.251 in
St. Venant torsional constant (J*1000)	0.005206 (in ⁴)
Torsional warping constant (Cw)	4.729 (in ⁶)
Radius of gyration (Ro)	5.311 in
Torsional flexural constant (Beta)	1.020 in

Product Data & Ordering Information:

Length 12'-0" long pieces
 Tabs spaced at: 12", 16", 19.2" or 24" intervals

ASTM & Code Standards:

- AISI North American Specification [NASPEC] 2004
- Structural framing is produced to meet or exceed ASTM C955
- Sheet steel meets or exceeds mechanical and chemical requirements of ASTM A1003
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs
- U.S. Patent Nos. 6,301,854; 6,691,478; 6,418,694; 6,691,487; 6,761,005; 7,240,459
- Canadian Patent No. 2319346, Mexican Patent No. 243294


Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).


LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

05.40.00 (Cold-Formed Metal Framing)

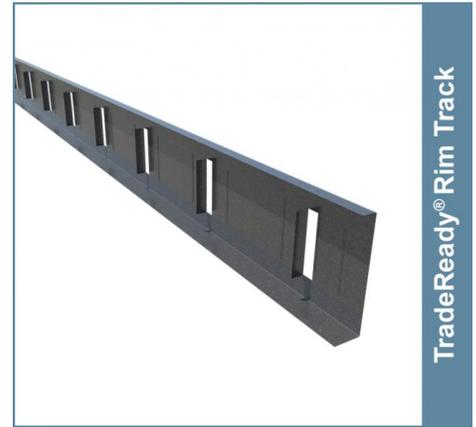

TradeReady® Rim Track

- Eliminates or drastically reduces support clips, joist hangers and web stiffeners
- Sizes include 7-1/4", 8", 9-1/4", 10", 11-1/4", 12" and 14".

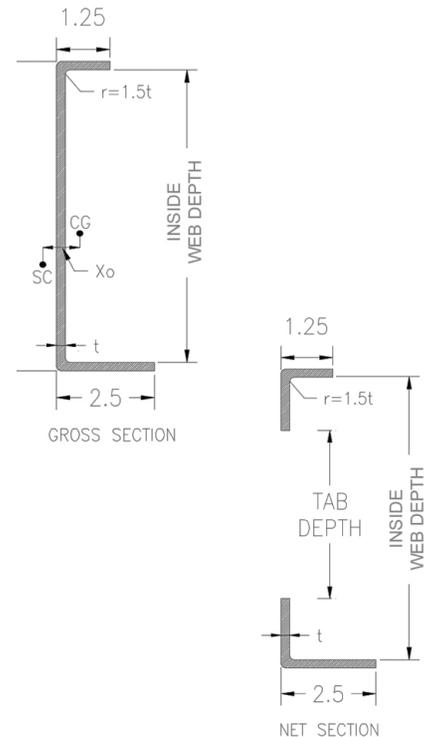

Project Information

Name:
 Address:

Contractor Information

Name:
 Contact:
 Phone:
 Fax:

Architect Information

Name:
 Contact:
 Phone:
 Fax: