

3/4" Bullnose J-Bead

Bullnose Corner Bead

Covers raw edges of drywall with 3/4" radius bullnose corner. Ideal for finishing door and window openings. The perforated flange accepts joint compound or veneer plaster for a flush finish. Designed to be applied after the wallboard is installed.

Product Data & Ordering Information:

Material: 0.028" PVC (Polyvinyl Chloride)
 Dimensions: 7/8" perforated flanges with short back leg

| Product code | Board thickness | Radius | Flange | Length | Pcs./Ctn. |
|--------------|-----------------|--------|--------|--------|-----------|
| BJB50S-8 | 1/2" | 3/4" | 7/8" | 8' | 30 |
| BJB50S-10 | 1/2" | 3/4" | 7/8" | 10' | 30 |
| BJB58S-10 | 5/8" | 3/4" | 7/8" | 10' | 30 |

ASTM & Code Standards:

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- ASTM D3678 Class 2 materials
- Installation: ASTM C840 & C841 (Interior Finishes)
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs


Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

09.22.00 (Support for Plaster & Gypsum Board)



- Moisture and dent resistant
- Produces finished edges at panel terminations
- Nail or slip on

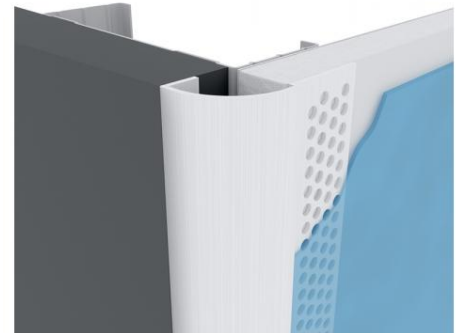

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: