

## J-Bead


### Commerical Beads

J-Bead provides a finished edge at gypsum board stops around door and window openings and at ceiling intersections. Requires no joint compound. Rigid vinyl is not a thermal transmitter and helps stop condensation where gypsum board terminates at exterior metal surfaces, such as window frames and mullions. Rust proof and dent resistant.

### Product Data & Ordering Information:

**Material:** 0.028" PVC (Polyvinyl Chloride)

Product code	Board thickness	Back leg	Return leg	Length	Pcs./Ctn.
JB19-10	3/16"	1"	1/2"	10'	50
JB25-10	1/4"	1"	1/2"	10'	50
JB38-10	3/8"	1"	1/2"	10'	50
JB50-8	1/2"	1"	1/2"	8'	50
JB50-10	1/2"	1"	1/2"	10'	50
JB58-8	5/8"	1"	1/2"	8'	50
JB58-10	5/8"	1"	1/2"	10'	50
JB58-12	5/8"	1"	1/2"	12'	50
JB75-10	3/4"	1"	1/2"	10'	50
JB100-10	1"	1"	1/2"	10'	50

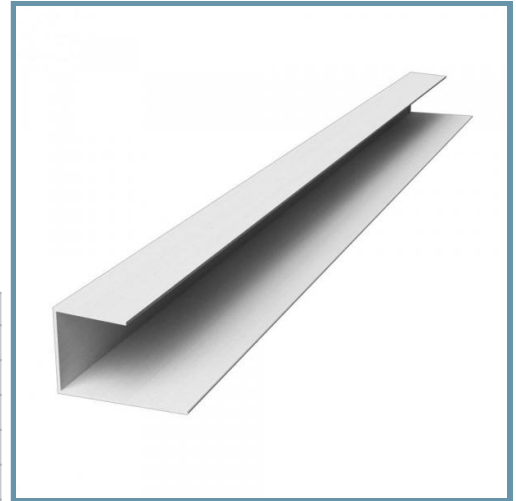

- Rust proof and dent resistant
- Produces finished edges at panel terminations
- Nail or slip on

### Code Approvals & Performance Standards

- [ASTM C840](#) Standard Specification for Application and Finishing of Gypsum Board
- [ASTM C841](#) Standard Specification for Installation of Interior Lathing and Furring
- [ASTM C1047](#) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- [ASTM D3678](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) Interior - Profile Extrusions
- [SDS Vinyl Corp](#) PVC Compounds

### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

