

L-Bead

Commerical Beads

L-Bead creates a clean detail at gypsum panel terminations into doors, windows and ceilings. Easy attachment is attained with nails, screws or staples to studs through bead flange. Multiple perforations along the 1-1/8" flange enhance strong compound adhesion and the raised shoulder provides for a flush finish. Rigid vinyl is rust proof, dent resistant and easy to field cut without distorting profile or leaving sharp edges and burrs.

Product Data & Ordering Information:

Material: 0.028" PVC (Polyvinyl Chloride)

Product code	Board thickness	Flange	Length	Pcs./Ctn.
LB38-10	3/8"	1-1/8"	10'	50
LB50-8	1/2"	1-1/8"	8'	50
LB50-10	1/2"	1-1/8"	10'	50
LB58-8	5/8"	1-1/8"	8'	50
LB58-10	5/8"	1-1/8"	10'	50
LB75-10	3/4"	1-1/8"	10'	50
LB100-10	1"	1-1/8"	10'	50
LB125-10	1-1/4"	1-1/8"	10'	50
LB150-10	1-1/2"	1-1/8"	10'	50
LB200-10	2"	1-1/8"	10'	50
LB250-10	2-1/2"	1-1/8"	10'	50
LB300-10	3"	1-1/8"	10'	50

ASTM & Code Standards:

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- ASTM D3678 Class 2 materials
- Installation: ASTM C840 & C841 (Interior Finishes)
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs

Storage:


All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

09.22.00 (Support for Plaster & Gypsum Board)



Vinyl Commercial Bead

- Rust proof and dent resistant
- Produces finished edges at panel terminations
- Raised shoulder and perforations enhance compound adhesion

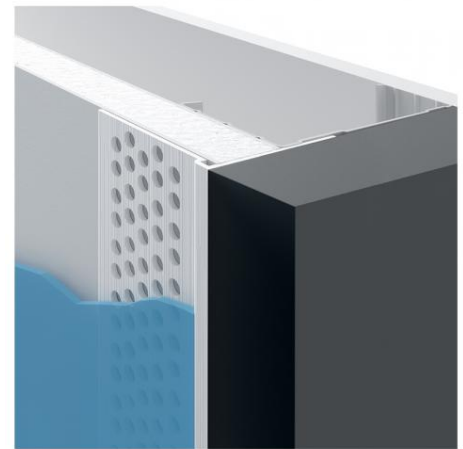

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: