

## Wire Corner Reinforcement (W951)

### Stronger exterior corners

A welded wire, right angle assembly, affording a truer, stronger, exterior corner that reduces cracking in Portland cement plaster or stucco. Wire corners are to be installed below the stucco surface, embedded at least 1/4" below the stucco finish surface.

Seven styles are offered for various application requirements. Bullnose,

Alternatively, you can use a Welded-Wire Lath (Structa-Wire) V Truss Corner where applications allow.

#### Product Data & Ordering Information:

Flange Size	Length	Pcs./Ctn.	Ft./Ctn.	Wt./Ctn.
2-1/2" x 2-1/2"	10'	40	400'	50 lbs.


#### ASTM & Code Standards:

- Material: ASTM C1063
- Installation: ASTM C841 (interior), C1063 (exterior) and EMLA-920.
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)


#### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

09.22.36 (Metal Lath)

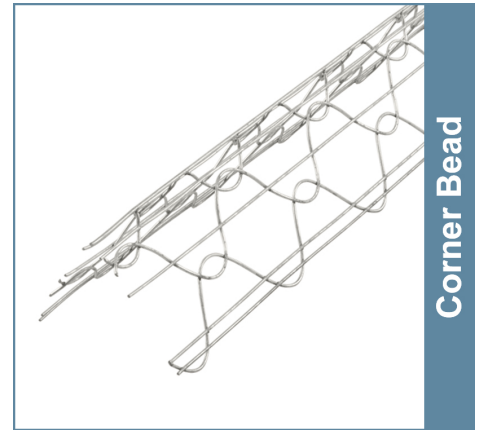

Corner Bead

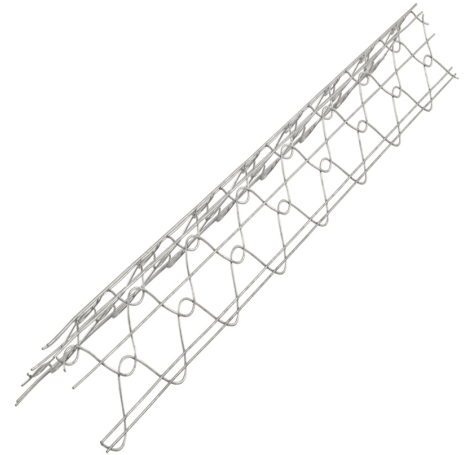

#### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: