

SANIGRID® Ceiling Grid System

CLASS A FIRE RATING PER ASTM E-84

PRODUCT

SANIGRID, the all-fiberglass ceiling grid system, is known for its moisture and corrosion resistance in high humidity installations. It won't rust, pit, dent, or peel like metal grid systems.

CERTIFICATIONS

Meets requirements of major model building codes for Class A interior wall and ceiling finishes of flame spread ≤ 25 , smoke developed 450 or less (per ASTM E-84) (see flame and smoke development rating information).

LIMITATIONS

SANIGRID II has not been tested for compliance with seismic ceiling grid requirements.


FRP panels and grid will discolor when installed near any heat source which radiates temperatures exceeding 130°F (55°C), such as cookers, ovens, and deep fryers. Do not install near heat sources exceeding 130°F (55°C).

Prolonged exposure to cooking smoke may result in embedded stains that will be difficult to remove.

Light fixture lens door dimensions should be compared to grid opening dimensions to validate compatibility.


LOAD SPAN RATING (per ASTM C-635)

HANGER WIRE SPACING	MAXIMUM FOR 2'x4' TILE	RATING
4 ft/oc 1.2 m/oc	20 lb.	Light Duty
2 ft/oc 0.6 m/oc	40 lb.	Intermediate
1 ft/oc 0.3 m/oc	60 lb.	Heavy Duty

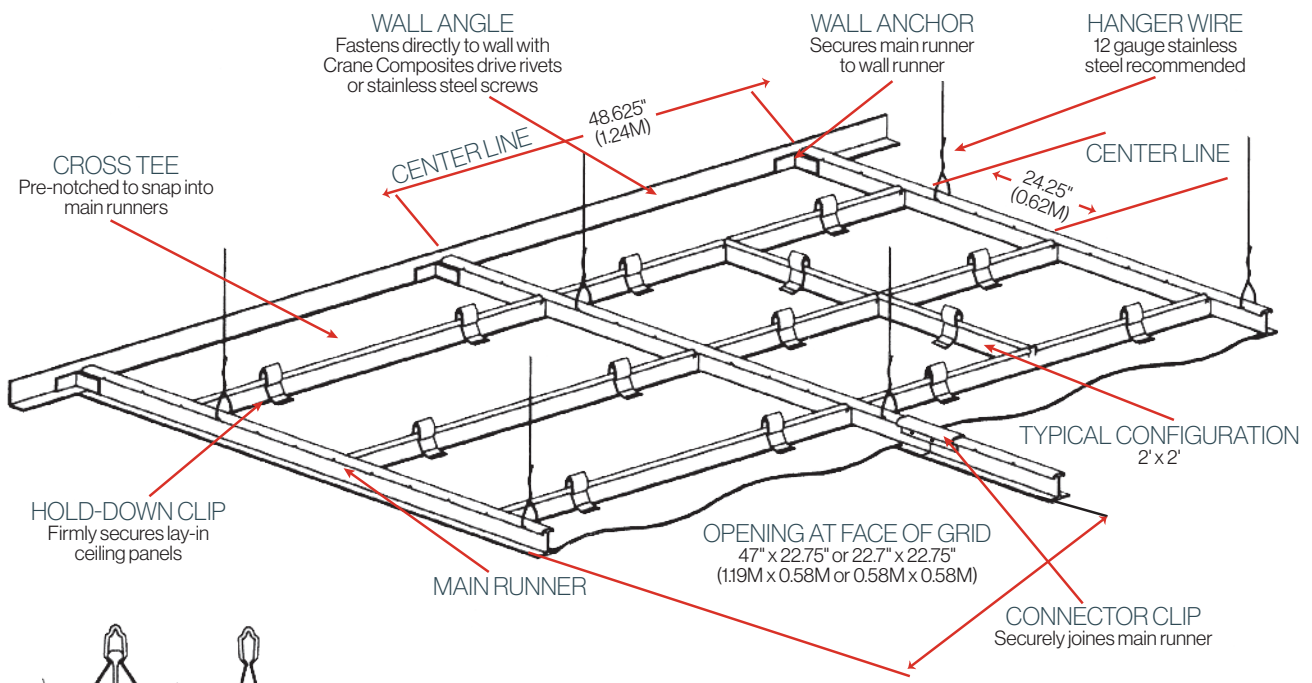

PART NAMES AND NUMBERS

All over length dimensions have a tolerance of +0.20"

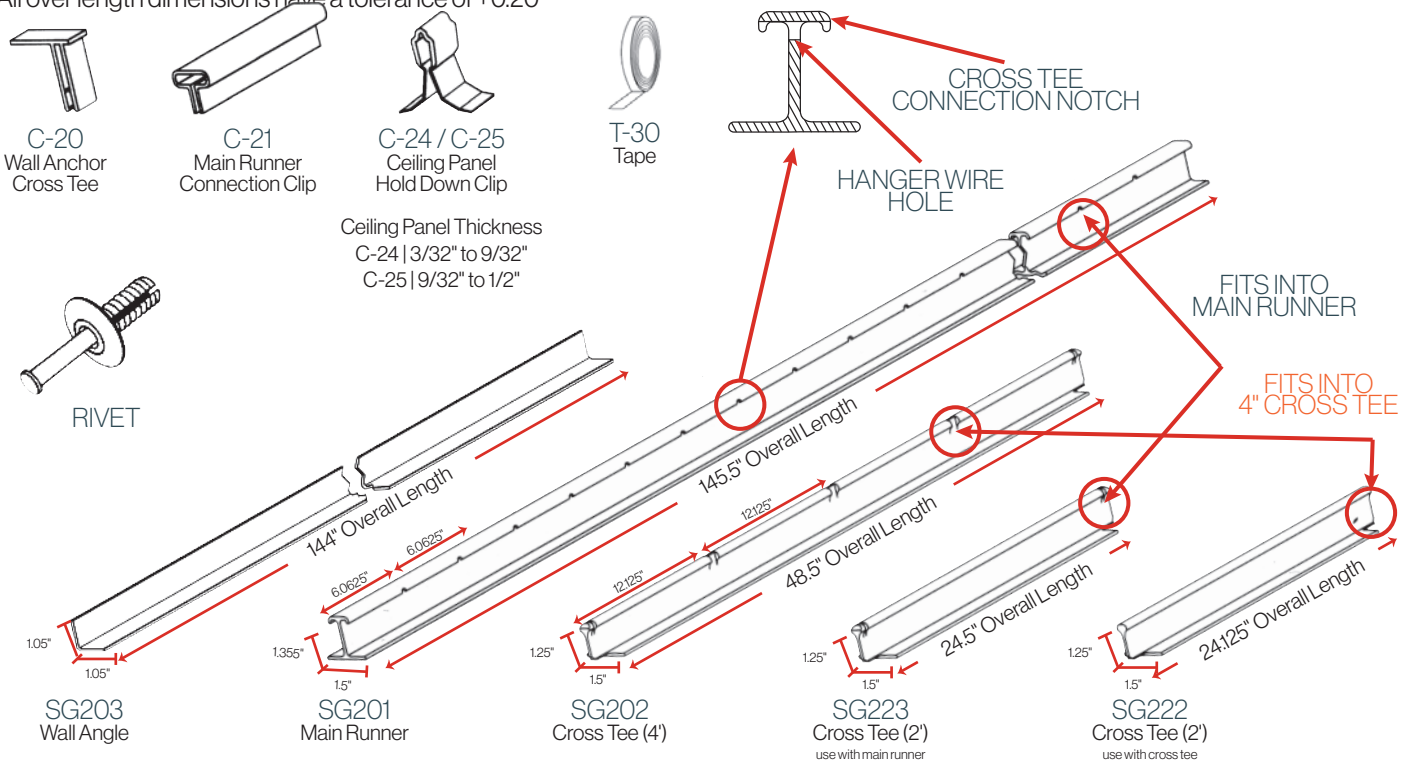

WALL ANCHOR CROSS TEE | C-20

Wall anchors are available to secure the main runner and cross tees to the wall angle. Industrial double-faced tape also available in lieu of screws to attach the wall anchor.

MAIN TEE SPLICE | C-21

The Main Tee Splice is used to securely join two main runners.

RIVET | R52501/R52502/R52503/R52507

R52503 | 3/4" R52501 | 1" R52502 | 1 1/2" R52507 | 2"
Not included with standard installation kit, purchased separately.

WALL ANGLE | SG203

1" x 1" wall angles come cut in standard 12' lengths to fasten directly to the wall.

CEILING PANEL HOLD DOWN CLIP | C-24/C-25

C-24 for panels 3/32" - 9/32" C-25 for panels 9/32" - 1/2"
Hold down clips are intended only to hold ceiling panels in position. They will not prevent panel warping under severe environmental conditions.

MAIN RUNNER | SG201

Main runners come in 12' 1 1/2" lengths. Notches for cross tee attachments and hanger wires are 6-1/16" on center.

CROSS TEE | SG202/SG222/SG223

SG202 - 48 1/2" pre-notched to snap into main runners.
SG223 - 24 1/2" to mate with the main runners.
SG222 - 24 1/8" nests between 4' cross tees.

PART # ID	COLOR	LENGTH	DESCRIPTION	SOLD IN FULL BOX/ BAG QT
R51512	White	12 FT	SG201- Main Tee	20
R51513	White	4 FT	SG202- 4 FT Cross Tee*	30
R51514	White	2 FT	SG - 222 - 2 FT Cross Tee	30
R51522*	White	2 FT	SG223 - 2 FT Cross Tee (main tee connection)*	30
R51519	White	12 FT	SG203 - Wall Angle	20
R51516	White	Not Applicable	C-20 - Wall Anchor	100
R51515	White	Not Applicable	C-21 - Connector Clip	100
R51517	White	Not Applicable	C-24 - Hold-Town Clip Panels 3/32" to 9/32"	100
R51518	White	Not Applicable	C-25 - Hold-Town Clip Panels 9/32" to 1/2"	100
R51521	White	Not Applicable	T-30 - Double Face Tape to Attach Wall Anchor	216 FT Roll

*Cross Tee SG223 is designed to interlock with the main tee and is used only where main tees are spaced 2' on center. THESE TEES ARE A NON STOCKED SPECIAL ORDER ITEM WITH A 4 WEEK LEAD TIME.

**Non-standard oversize ceiling panels (23.75" x 48" and 23.75" x 24" - use with 2ft cross tee SG223) are available to prevent ceiling panel from shifting. These panels will not fit standard metal grid systems.

SANIGRID + GLASBORD CEILING PANEL SIZES

GRID SIZE	5/8" 15.9mm or less	3/4" 19.1mm	1" 25.4mm and over
A 2' x 4' 0.6m x 1.2m	23-3/4" x 48" 0.6m x 1.2m	Not Recommended	23-3/4" x 47-1/2" 0.6m x 1.2m
B 2' x 2' 0.6m x 0.6m	23-3/4" x 23-3/4" 0.6m x 0.6m	Not Recommended	23-3/4" x 47-1/2" 0.6m x 1.2m
C 2' x 2' 0.6m x 0.6m	23-3/4" x 24" 0.6m x 0.6m	Not Recommended	23-3/4" x 47-1/2" 0.6m x 1.2m

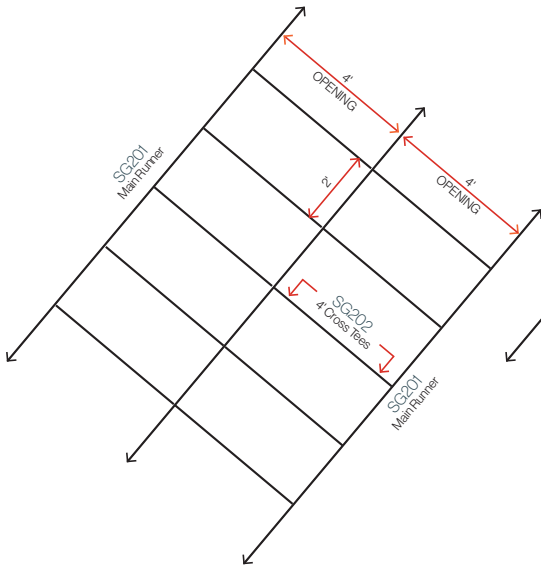


FIGURE A

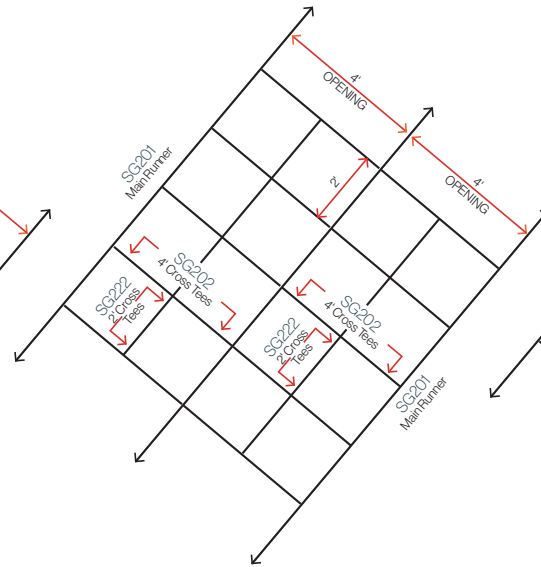


FIGURE B

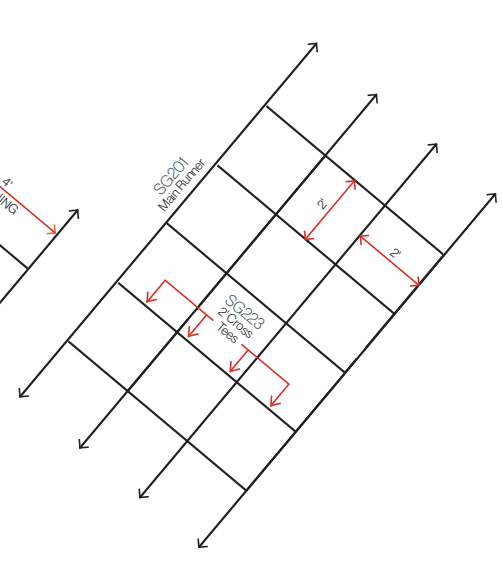


FIGURE C

- A. Grid configured with main tees 4' O.C. and 4' cross tees interlocking main tees.
- B. Grid configured with main tees 4' O.C. and 4' cross tees interlocking main tees and 2' cross tees (SG222) intersecting 4' tees.
- C. Grid configured with main tees 2' O.C. and 2' cross tees (SG223) interlocking main tees.

IMPORTANT INSTALLATION NOTES

The main runner notches and cross tee lengths have been sized to provide a 23 3/4" x 47 3/4" or 23 3/4" x 23 3/4" opening at the top of the grid.

As a result the main runners are 48" on the center and the cross tees are 24 1/4" on center. This will provide clearance for laminated, rigid, or gypsum ceiling panels, light fixtures or air diffusers. THIS MAY AFFECT CEILING LAY-OUT.

To accommodate the over-size dimensions of the SANIGRID II ceiling system, 23 3/4" x 48" GLASBORD ceiling panels are available and required. These panels WILL NOT FIT standard metal grid systems so they should be ordered only for SANIGRID II installations. The standard 23 3/4" x 23 3/4" panels will fit the 2' x 2' SANIGRID II system.

Before beginning installation, ensure that you have the correct cross tee to match your ceiling layout. Two different 2' cross tees are available. The SG222 is designed to mate with the 4' cross tee. The SG223 is designed to mate with the 12' main runner.

To accommodate light fixtures and other ceiling inserts, the SANIGRID II main runners are spaced 48.60" on center and the 4' cross tees are spaced 24.25" on center. This spacing will provide a 23-3/4" x 47-3/4" or 23-3/4" x 23-3/4" opening at the top of the grid. This may affect ceiling layout. Check component

sizes (above and below) and center lines before laying out ceiling plan. This may also affect light fixture positions and other trades above the ceiling line.

Light fixtures must be supported independent of the ceiling grid system. Opening at face of grid for light fixture lens door is 47" x 22-3/4" or 22-3/4" x 22-3/4".

CAUTION

When cutting, drilling, or grinding fiberglass materials, protect eyes with goggles.

Wear a filter mask to avoid breathing dust, and wear gloves to prevent splinters.

A hacksaw is recommended for hand cutting ceiling system

FABRICATING RECOMMENDATIONS

Prior to working with our products, see our most current SDS at valtoem.com/sds

STEP BY STEP INSTALLATION INSTRUCTIONS


Step 1

Install SANIGRID II wall angle at desired height around perimeter of room in the usual manner. Use non-corrosive fasteners appropriate for wall material. Pre-drill appropriate size hole for fastener.



Step 2

Install hanger eyes and wire at appropriate spacing per chart. Use galvanized anchors and 12 ga. galvanized metal, or stainless steel wire. (Use corrosion-resistant materials suitable for the intended environment).

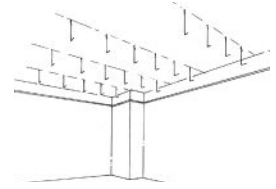

Step 3

Secure main runners to hanger wires and make leveling adjustments. Where main tees butt, secure with connector clip. Additional holes may be drilled in main tees as required for proper alignment with hanger wires. Space holes no closer than 4" (102 mm) from end of tee or another hole.

IMPORTANT: LIGHT FIXTURES MUST BE INSTALLED TO HANG INDEPENDENTLY OF THE GRID SYSTEM.




Step 4

Where the main runner meets the wall angle, cut away the face of the runner so that the vertical web will rest on the wall angle. Scoring the runner on both sides of the vertical and horizontal web will assist in providing a clean break.



Step 5

Install a wall anchor clip or use the T-30 tape to affix the C-20 clip to the wall angle and a diagonal hanger wire. This will prevent shifting and misalignment of the main runners.

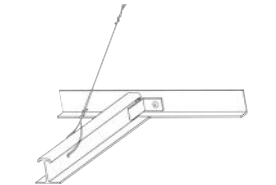

Step 6

Install cross tees by positioning tee at the cross tee notch on the main tee. Both ends must be positioned at the same time. Then simply twist the cross tee into position. At the cross tee wall angle junction, cut away the face and install wall anchor as was done for the main runners.



Step 7

Install lay-in ceiling panels in the usual manner.



Step 8

Install two hold down clips along the cross tees only. Hold down clips are intended only to hold panels in position. They will not prevent warping under severe conditions.



At Valto, we partner with our customers, and through innovation, deliver advanced materials that enhance everyday environments. We succeed through a culture of collaboration, continuous improvement, and excellence. With integrity at our core, we challenge the status quo and pursue innovative approaches that benefit our customers and associates.

Since 1954, Valto Engineered Materials has provided innovative products and services and is a leading provider of FRP composite panels. Our lightweight composite products deliver unsurpassed strength and durability, and we continue to pioneer next level performance in building materials, recreational vehicles, and transportation.