


TECHNICAL DATA SHEET

DESCRIPTION

A3 Standard Snap Tie is manufactured with either hot or cold forged integral heads and is equipped with flats or crimps to prevent turning in the concrete during breakback operations. Coating the tie with wax will aid in breakback operation.

APPLICATION

Used for handset wood wall forming.

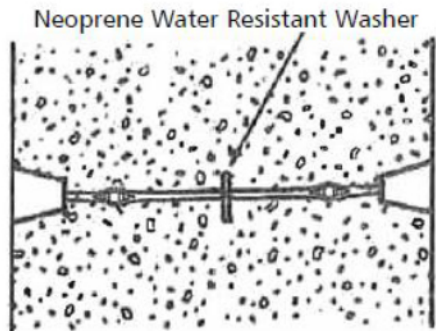

FEATURES

- 2,250 lbs. SWL
- Available in any length from 6" to 480"
- Available with plastic cone, metal cone, metal spreader, flat fixed washer or cupped loose washer
- Can be manufactured with a tight fitting neoprene washer located near the center of tie to eliminate water seepage along the tie

INSTALLATION

1. Drill holes in plywood 1/8" larger than the snap tie head (usually 5/8" diameter drill bit will be required)
2. Place the ends of snap ties through the holes in the plywood
3. Place the bracket (Jahn® "A", Jahn® "C" or Omni wedge) on the tie
4. The proper tie head position is at the midpoint or higher of the Omni wedge slot. Correct spacing between double wales is 5/8" to 3/4"
5. Jahn® "A" bracket is utilized to hold a single wale and can be installed before or after the wales have been positioned

RELATED PRODUCTS

- A2 Plastic Cone
- A16 Omni Wedge
- A81 Jahn® "A" Bracket
- A82 Jahn® "C" Bracket

HOW TO ORDER

Additional sizes and materials are available made to order. Please call for availability, lead time and pricing.

ORDERING INFORMATION

SNAP TIE STANDARD - METAL SPREADER

Product Code	Description	Weight
15000	6" X 4-3/4" L&W	0.23 LB
15006	8" X 4-3/4" L&W	0.24 LB
15012	10" X 4-3/4" L&W	0.27 LB
15018	12" X 4-3/4" L&W	0.29 LB
15030	16" X 4-3/4" L&W	0.34 LB
15036	18" X 4-3/4" L&W	0.37 LB
15044	24" X 4-3/4" L&W	0.43 LB
15150	6" X 8-1/4" L&W	0.30 LB
15153	7" X 8-1/4" L&W	0.31 LB
15156	8" X 8-1/4" L&W	0.32 LB
15159	9" X 8-1/4" L&W	0.33 LB
15162	10" X 8-1/4" L&W	0.34 LB
15168	12" X 8-1/4" L&W	0.37 LB
15171	13" X 8-1/4" L&W	0.39 LB
15174	14" X 8-1/4" L&W	0.39 LB
15177	15" X 8-1/4" L&W	0.40 LB
15180	16" X 8-1/4" L&W	0.41 LB
15186	18" X 8-1/4" L&W	0.44 LB
15194	24" X 8-1/4" L&W	0.52 LB
15200	30" X 8-1/4" L&W	0.62 LB
15206	36" X 8-1/4" L&W	0.61 LB

TECHNICAL DATA SHEET

SNAP TIE STANDARD - 1 X 1 PLASTIC CONES

Product Code	Description	Weight
15400	6 X 4-3/4 L&W	0.22 LB
15403	7 X 4-3/4 L&W	0.23 LB
15404	7-5/8 X 4-3/4 L&W	0.24 LB
15406	8 X 4-3/4 L&W	0.24 LB
15409	9 X 4-3/4 L&W	0.26 LB
15412	10 X 4-3/4 L&W	0.27 LB
15416	11 X 4-3/4 L&W	0.27 LB
15418	12 X 4-3/4 L&W	0.29 LB
15424	14 X 4-3/4 L&W	0.32 LB
15427	15 X 4-3/4 L&W	0.33 LB
15430	16 X 4-3/4 L&W	0.34 LB
15436	18 X 4-3/4 L&W	0.36 LB
15440	20 X 4-3/4 L&W	0.38 LB
15444	24 X 4-3/4 L&W	0.44 LB
15448	30 X 4-3/4 L&W	0.52 LB
15056	36 X 4-3/4 L&W	0.53 LB
15450	6 X 8-1/4 L&W	0.30 LB
15453	7 X 8-1/4 L&W	0.31 LB
15454	7-5/8 X 8-1/4 L&W	0.31 LB
15456	8 X 8-1/4 L&W	0.32 LB
15459	9 X 8-1/4 L&W	0.34 LB
15462	10 X 8-1/4 L&W	0.35 LB
15468	12 X 8-1/4 L&W	0.37 LB
15474	14 X 8-1/4 L&W	0.39 LB
15477	15 X 8-1/4 L&W	0.40 LB
15480	16 X 8-1/4 L&W	0.43 LB
15486	18 X 8-1/4 L&W	0.44 LB
15490	20 X 8-1/4 L&W	0.48 LB
15494	24 X 8-1/4 L&W	0.51 LB
15500	30 X 8-1/4 L&W	0.55 LB
15498	36 X 8-1/4 L&W	0.62 LB
15501	42 X 8-1/4 L&W	0.72 LB
14538	8 X 1-1/16 L&W	0.17 LB
14542	12 X 1-1/16 L&W	0.22 LB
15420	6 X 1-3/16 L&W	0.15 LB
15423	8 X 1-3/16 L&W	0.18 LB
15401	6 X 1-5/8 L&W	0.16 LB
15407	8 X 1-5/8 L&W	0.19 LB
15413	10 X 1-5/8 L&W	0.21 LB
15419	12 X 1-5/8 L&W	0.23 LB
15550	6 X 5-1/8 L&W	0.24 LB
15552	8 X 5-1/8 L&W	0.27 LB

SNAP TIE STANDARD - 1-1/4 CUPPED LOOSE WASHER

Product Code	Description	Weight
14506	6 X 1-3/16 L&W	0.16 LB
14508	8 X 1-3/16 L&W	0.18 LB
14225	6 X 1-5/8 L&W	0.17 LB
14227	8 X 1-5/8 L&W	0.19 LB
14232	6 X 4-3/4 L&W	0.24 LB
14236	8 X 4-3/4 L&W	0.26 LB
14242	10 X 4-3/4 L&W	0.28 LB
14245	12 X 4-3/4 L&W	0.30 LB
14246	14 X 4-3/4 L&W	0.33 LB
14252	16 X 4-3/4 L&W	0.35 LB
14255	18 X 4-3/4 L&W	0.37 LB
14261	24 X 4-3/4 L&W	0.44 LB
14342	8 X 5-1/8 L&W	0.27 LB
14254	8 X 8-1/4 L&W	0.34 LB
14263	12 X 8-1/4 L&W	0.39 LB

SNAP TIE STANDARD - 1-1/4 FLAT FIXED WASHER

Product Code	Description	Weight
14101	6 X 1-3/16 L&W	0.16 LB
14104	8 X 1-3/16 L&W	0.18 LB
14116	6 X 1-5/8 L&W	0.17 LB
14118	8 X 1-5/8 L&W	0.19 LB
14120	10 X 1-5/8 L&W	0.21 LB
14148	8 X 4-3/4 L&W	0.26 LB
14332	8 X 5-1/8 L&W	0.27 LB

MANUFACTURER

Dayton Superior Corporation
 1125 Byers Road
 Miamisburg, OH 45342
 Customer Service: 888-977-9600
 Technical Services: 877-266-7732
 Website: www.daytonsuperior.com

TECHNICAL DATA SHEET**WARRANTY (ACCESSORIES)**

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.