

### TECHNICAL DATA SHEET

#### DESCRIPTION


Made in America, taper threaded reinforcing bar is available in single ended, bent, hook ended, double ended or a fully custom configuration. It requires no torque wrench to assemble and can be used with any Taper-Lock splicing product.

#### APPLICATION

The D368 is a splicing form saver system that eliminates the need for rebar through holes in formwork. This system is used to connect rebar between segmental concrete pourings. It may be attached to formwork through an integral nailing flange on the D368.

#### PRODUCT SPECIFICATION

- Available in rebar sizes #4 (13mm) through #11 (36mm)
- Performs in tension and compression as a Type 2 connection.
- Available in plain rebar finish or epoxy coated
- May contribute to LEED credits

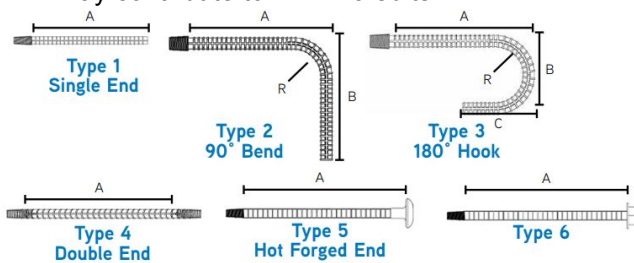

#### FEATURES

- Installation does not require a torque wrench means it is easier to use and saves time.
- Ability to use the flange and nails to attach the system to forms eliminates repair costs associated with holes for rebar.
- Components can be fabricated to order with straight, bent, hooked, or double ended for versatility to meet project needs.
- Taper-Lock tapered threads are designed for hand tightening and faster installation.
- End anchor provides 9ab net head are.

#### BENEFITS

- Easier to use and up to 25% faster installation
- Saves \$100 in form repair costs by not requiring a rebar through-hole
- Versatility to meet project needs

#### HOW TO SPECIFY

Specific:

Mechanical connections shall be Taper-Lock® Rebar Splices as manufactured by Dayton Superior Corp.

Generic:

The mechanical connection shall meet building code requirements of developing in tension and compression as required by \_\_\_\_\_ (insert name here). The mechanical connections shall be the positive locking, taper threaded type couplers manufactured from high quality steel. The bar ends must be taper threaded using the manufacturer's bar threading equipment to ensure proper taper and thread engagement. All couplers shall be installed per the manufacturer's approved procedures.

#### TECHNICAL DATA

Bar Size Designation	Type 1			Type 2			Type 3			Type 4	Type 5	Type 6	
	USA	Metric(mm)	CN(M)	A min	A min	B min	A min	B min	C min	A min	A min	A min	R Min
#4	[13]	[10]		9"	4"	2.5"	4"	2.5"	2.5"	12"	12"	12"	1.25"
#5	[16]	[15]		9"	5"	2.5"	5"	3.75"	2.5"	12"	12"	12"	1.875"
#6	[19]	[20]		9.25"	6"	3"	6"	4.5"	3"	14"	14"	14"	2.25"
#7	[22]			9.25"	7"	3.5"	7"	5.25"	3.5"	16"	16"	16"	2.625"
#8	[25]	[25]		15.5"	8"	4"	8"	6"	4"	16"	16"	16"	3"
#9	[29]	[30]		15.5"	9"	4.5"	9"	9.5"	4.5"	16"	16"	16"	4.75"
#10	[32]			15.75"	10"	5"	10"	10.75"	5"	16"	16"	16"	5.375"
#11	[36]	[35]		16"	11"	5.5"	11"	12"	5.5"	16"	16"	16"	6"

\* Tolerance on bending is +0"-.1"

#### APPROVALS / COMPLIANCE

- ACI 318 Type 2
- Caltrans Service Splice
- Ministries of Transportation, Canada
- Army Corps of Engineers CW 03210
- State Departments of Transportation
- AASHTO
- International Building Code (IBC)
- City of Los Angeles Department of Building and Safety

#### INSTALLATION

1. Insert male Taper-Lock threads into a female Taper-Lock threaded coupler.
2. Rotate the male threaded rebar clockwise until the threads of the male bar interlock with the threads of the female coupler, making sure the connection is hand-tight (5 ft.-lbs.).

#### RELATED PRODUCTS

- D368 Threaded Bar
- D081 Taper-Lock® Male Thread Protector
- D382 Taper-Lock® Female Thread Protector
- Steel-Ply®

## TECHNICAL DATA SHEET

### HOW TO ORDER

- Quantity: i.e., 600 pieces
- Type: i.e., Type 1, Single Ended
- Rebar Size: i.e., #11
- Dimensions: i.e., 36" Long

### ORDERING INFORMATION

#### TAPER-LOCK® MALE THREADED BARS - #4 - ASTM A615 GR 60 - PLAIN

Product Code	Description	Weight
129289	#4 - 13MM X 24"	1.34 LB

#### TAPER-LOCK® MALE THREADED BARS - #5 - ASTM A615 GR

##### 60 - PLAIN

Product Code	Description	Weight
129290	#5 - 16MM X 30"	2.61 LB

#### TAPER-LOCK® MALE THREADED BARS - #6 - ASTM A615 GR

##### 60 - PLAIN

Product Code	Description	Weight
129291	#6 - 19MM X 36"	4.51 LB
145123	#6 - 19MM X 42"	5.30 LB

#### TAPER-LOCK® MALE THREADED BARS - #7 - ASTM A615 GR

##### 60 - PLAIN

Product Code	Description	Weight
145125	#7 - 22MM X 42"	7.20 LB

### MANUFACTURER

Dayton Superior Corporation  
 1125 Byers Road  
 Miamisburg, OH 45342  
 Customer Service: 888-977-9600  
 Technical Services: 877-266-7732  
 Website: www.daytonsuperior.com

### WARRANTY (ACCESSORIES)

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.