

D51A, D52A, D53A, D54A Form Savers

DESCRIPTION

The DBR Form Savers are simple, easy to use and familiar to all construction workers. The female splice bars are fastened to the formwork by nails, screws or an NC threaded bolt of proper diameter and length.



FEATURES & BENEFITS

- The DBR Mechanical Splice System meets or exceeds codes requiring 125% fy.
- Used in areas where rebar congestion prevent the use of long lap splices, where a continuous load path is required in segmental pours, and where through holes in formwork is not required.
- Available in #4[13MM] - #11[36MM]
- Unibody construction
- Integral nailing flange
- Parallel threads




D51A

D52A

PRODUCT DATA

Technical Data

Splice Size	A (IN) (+0.125 /-0.0)	Thread Size
#4 [13MM]	0.750	1/2" - 13 NC
#5 [16MM]	0.875	5/8" - 11 NC
#6 [19MM]	1.000	3/4" - 10 NC
#7 [22MM]	1.125	7/8" - 9 NC
#8 [25MM]	1.250	1" - 8 NC
#9 [29MM]	1.375	1-1/8" - 8UN
#10 [32MM]	1.500	1-1/4" - 8UN
#11 [36MM]	1.688	1-3/8" - 8UN

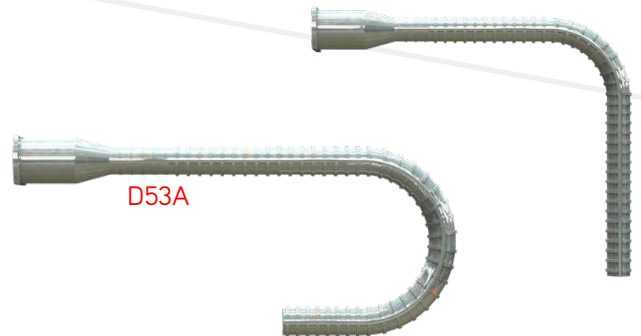

D53A

D54A

