



## T3 and T3A End Pickup Inserts

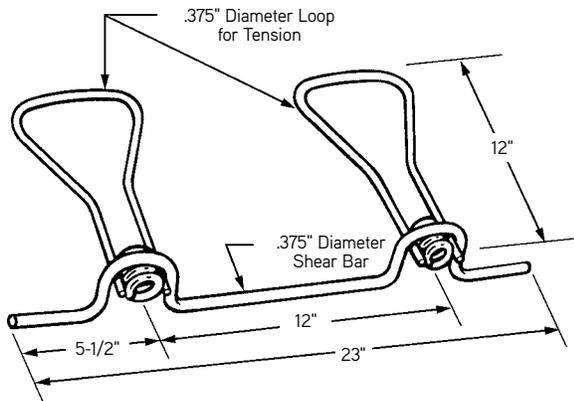

**T3 End Pickup Insert**

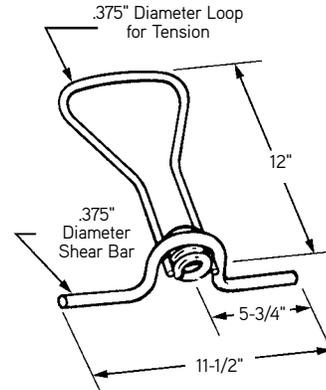

**T3A End Pickup Insert**

**T3 and T3A End Pickup Insert Selection Table**

Insert Type	Bolt Diameter	Load Condition	4" Panel	5" Panel	5-1/2" Panel	6" Panel	6-1/2" panel	7" Panel	7-1/2" Panel	8" Panel
T3A	3/4" Single	Tension	1,500 lbs.	—	—	—	—	—	—	—
		Shear	1,250 lbs.	—	—	—	—	—	—	—
	1" Single	Tension	—	3,000 lbs.	3,300 lbs.	3,600 lbs.	3,900 lbs.	4,200 lbs.	4,500 lbs.	4,500 lbs.
		Shear	—	1,350 lbs.	1,375 lbs.	1,400 lbs.	1,425 lbs.	1,450 lbs.	1,500 lbs.	1,550 lbs.
T3	3/4" Double	Tension	2,500 lbs.	—	—	—	—	—	—	—
		Shear	1,500 lbs.	—	—	—	—	—	—	—
	1" Double	Tension	—	4,000 lbs.	4,400 lbs.	4,800 lbs.	5,200 lbs.	5,600 lbs.	6,000 lbs.	6,000 lbs.
		Shear	—	2,100 lbs.	2,250 lbs.	2,400 lbs.	2,550 lbs.	2,700 lbs.	2,850 lbs.	3,000 lbs.

Safe working load provides a factor of safety of approximately 4 to 1 in 3,000 psi normal weight concrete.  
 Safe Working Loads are based on 1/2" setback from face of concrete.

**To Order:**

Specify: (1) quantity, (2) name, (3) diameter.

**Example:**

200, T3 End Pickup Inserts, 1" diameter.

Lifting/Handling Inserts and Accessories