

Pro-Poxy™ Type III DOT LT

DESCRIPTION


Pro-Poxy Type III DOT LT is a revolutionary curing epoxy system. Its breakthrough technology enables application in lower temperatures, extending the application season.

FEATURES & BENEFITS

- Can be applied in temperatures down to 40°F (5°C)
- Low modulus, high strength adhesive meeting ASTM C-881 Type III requirements
- 100% solids, V.O.C compliant
- Moisture tolerant, low viscosity epoxy urethane binder
- Can be used as a Bridge Deck Overlay binder and High Friction Surface Treatment

PRODUCT DATA

- Meets ASTM C-881, Type III, Grade 1, Classes B & C specification
- Mix ratio is 1:1, by volume
- Gel time for a 60 gm sample is 32 minutes @ 45°F (7.2°C) and 10 minutes @ 73°F (23°C)

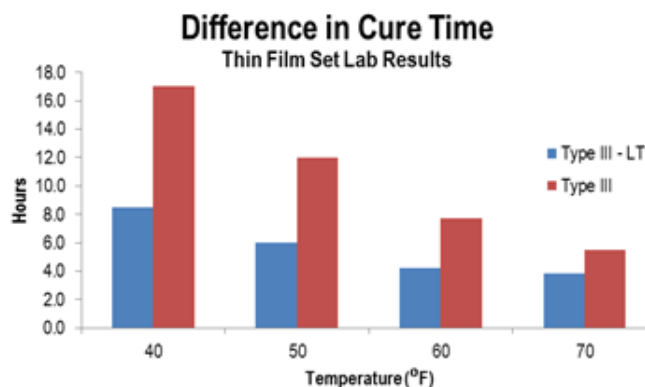

Pro-Poxy Type III DOT LT provides superior performance where it matters: at low temperatures. The colder it gets, the better it out-performs current epoxy systems, while still maintaining enhanced, yet manageable cure times.