


ELEGANT AND BEAUTIFUL CONCRETE THAT ANYONE CAN ACHIEVE

A BREAKTHROUGH, EASY TO USE **CONCRETE SURFACE RETARDER** THAT LOWERS APPLICATION COST FOR HIGHER MARGINS.

- UNIFORM HIGH-QUALITY FINISH
- UNMATCHED RELIABILITY AND CONTROL
- ENVIRONMENTALLY FRIENDLY
- AVAILABLE IN 12 DIFFERENT GRADES
- CREATES FINISHES FROM MICRO ETCH TO FULLY EXPOSED AGGREGATE.
- COST-EFFECTIVE COVERAGE RATES UP TO 3X BETTER THAN COMPETITORS
- OUTSTANDING TECHNICAL SUPPORT

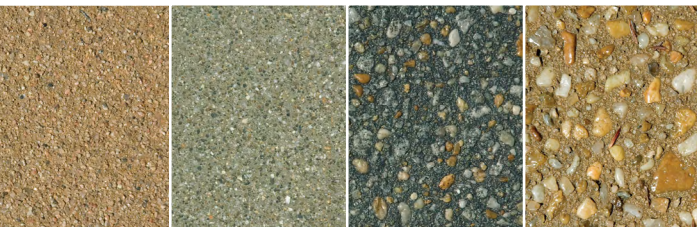

**DAYTON
SUPERIOR**
1125 Byers Road
Miamisburg, OH 45342
937-866-0711
888-977-9600

TOP-CAST®

**BUILDING
STRENGTH™**

**BUILDING
STRENGTH™**

TOP-CAST®

TOP SURFACE
RETARDER FOR
DECORATIVE
CONCRETE FINISHES



Copyright © 2022 Dayton Superior Corporation, All Rights Reserved.



GET BETTER RESULTS. NO MISTAKES. IT'S SO EASY.

Adds profitable decorative opportunities with no special equipment or training.



SPRAY

- Apply after sweat finish
- Spray or roll
- Pigmented to show coverage
- Rain-safe in 2 hours
- No plastic needed



RINSE

- Expose within 24 hours
- Rinse same day or pressure wash next day






SHOW

- Uniform finish every time
- Increases productivity with better results

TOP-CAST® Concrete Surface Retarders

CHOOSE YOUR FINISH

- Available in 12 different grades that create a range of finishes from micro-etch to fully exposed aggregate.
- Grade selection based on estimated etch depth and strength of mix.
- All grades are formulated separately to create distinctly different products.

TOP-CAST FINISH TABLE	NO. CODE	ESTIMATED ETCH DEPTH	PACKAGE COLOR
<i>MICRO ETCH</i> 	01	Light Acid Wash	White
	03	Acid Etch Finish	Violet
	05	Sandblast Finish	Light Blue
	15	Up to 1/4" (6.5mm)	Yellow
<i>MEDIUM ETCH</i> 	25	1/8" - 1/4" (3mm - 6.5mm)	Beige
	50	1/8" - 3/8" (3mm - 9.5mm)	Canary Green
	75	1/8" - 3/8" (3mm - 9.5mm)	Blue
	100	3/8" - 1/2" (9.5mm - 13mm)	Gray
<i>FULL-DEPTH ETCH</i> 	125	3/8" - 5/8" (9.5mm - 16mm)	Pink
	150	3/8" - 5/8" (9.5mm - 16 mm)	Green
	200	5/8" - 1" (16mm - 25mm)	Salmon
	250	1" - 1-1/2" (25mm - 38mm)	Orange

Values listed are for 3500 psi mix. In some conditions with certain mixes it may be necessary to rinse the retarded matrix the same day.

Always prepare mock up at the project to verify the appropriate grade for specific mix designs.

UNIFORM HIGH-QUALITY FINISH

UNMATCHED RELIABILITY AND CONTROL

ENVIRONMENTALLY FRIENDLY



COST-EFFECTIVE COVERAGE RATES
UP TO 3X BETTER THAN COMPETITORS

OUTSTANDING TECHNICAL SUPPORT

Refer to the Technical Data Sheet, Top-Cast User Guide and SDS for full instructions and safe practices prior to use.
Visit: www.DaytonSuperior.com