

DEWALT®

ANCHORS & FASTENERS

ICC-ES
ESR- 4810

HEAVY DUTY UNDERCUT ANCHORS



CCU+™ CRITICAL CONNECTION UNDERCUT

When critical mechanical anchor connections are required, consider the DEWALT® Critical Connection Undercut (CCU+™). The 3/8", 1/2", 5/8" or 3/4" CCU+™ anchor range combine with Hollow Stop and Undercutting Bits, 60V MAX* rotary hammers and dust extractors for an OSHA Table 1 compliant cordless system. Available in 2 steel grades and all Made in the USA** for Buy American Act construction projects.



* System is compliant to the Exposure Control Methods described in Table 1 of 29 CFR 1926.1153 when outlined components are operating and maintained in accordance to manufacturer's instructions.

**CCU+ Anchors are Made in the USA.



GUARANTEED TOUGH.®

CCU+™ ANCHORS

CCU+™ ANCHORS



MADE IN THE USA

No forms or waivers; Infrastructure construction ready

GENERAL APPLICATIONS

- Beam, column and post anchorages
- Safety related attachments and assemblies
- Industrial facilities and treatment works
- Transportation structures
- Equipment supports and utility systems
- Barriers, guards and railing mounts
- Seismic qualification (SDC A – F)
- Tension zone / cracked concrete



FORMED FROM HIGH STRENGTH STEEL

Anchors available in High Strength steel - Carbon Steel B7 and 316 Stainless Steel Class 2

PRESET AND THRUBOLT STYLES

Preset and thrubolt styles in all steel grades

WORKS WITH THE DUST-X™ INSTALLATION SYSTEM

Installs with manual or rotary hammer powered installation sleeve

SPECIFICATIONS

STEEL GRADE	B7, 316 SS C2
COUNTRY OF ORIGIN	USA
CODE REPORT	ICC-ES ESR-4810
APPROVALS	Cracked concrete, Seismic

OPTIONS - MATERIAL AND DIAMETER

B7 Available in preset and thrubolt styles	316 Stainless Steel Class 2 Available in preset and thrubolt styles
3/8"	3/8"
1/2"	1/2"
5/8"	5/8"
3/4"	3/4"

INSTALLATION ACCESSORIES

CCU+ HOLLOW STOP BIT

DIAMETER
3/8"
1/2"
5/8"
3/4"



CCU+ HOLLOW UNDERCUT BIT

DIAMETER
3/8"
1/2"
5/8"
3/4"




STANDARD UNDERCUT BIT

DIAMETER
3/8"
1/2"
5/8"
3/4"



SIMPLIFY DRILLING AND HOLE CLEANING INTO ONE STEP WITH DEWALT HOLLOW DRILL BITS

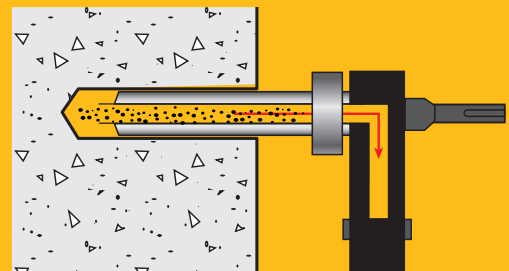

PART OF

DUST X+™
ANCHOR INSTALLATION SYSTEM



DEWALT
SUBMITTAL
GENERATOR

Create a submittal for DEWALT® Anchors products

DUST X+™

ANCHOR INSTALLATION SYSTEM



EXTRACTOR

ROTARY HAMMER

HOLLOW BIT

ANCHORS



DESIGNED TO FAST-TRACK ANCHOR INSTALLATION AND REDUCE DUST EXPOSURE.

Using the DEWALT Hollow Bit™ and dust extractor with SDS rotary hammers creates an OSHA-compliant (1926.1153) solution for dust control. The Hollow Bit™ simultaneously extracts dust to clean holes while drilling. For agility on the jobsite, go cordless with DEWALT's offering of battery-powered hammer drills, dust extractors and portable power stations.

DUST EXTRACTORS



DWV010 8 Gallon HEPA/RRP Dust Extractor



DWV012 10 Gallon Wet/Dry HEPA/RRP Dust Extractor



DCV585 60V MAX* Dust Extractor

SDS ROTARY HAMMERS



DCH416 60V MAX* Brushless 1-1/4" SDS PLUS Rotary Hammer



DCH614 60V MAX* Brushless 1-3/4" SDS MAX Combination Rotary Hammer

With respect to 60V MAX, Maximum initial battery voltage (measured without a workload) is 60 volts. Nominal voltage is 54.

DEWALT®

GUARANTEED TOUGH.®

GET THE FULL SOLUTION FROM DEWALT



DESIGN

STATE-OF-THE-ART STRUCTURAL
DESIGN SOFTWARE



BUILD

POWER TOOLS & ACCESSORIES
HAND TOOLS
ANCHORS & FASTENERS



SUPPORT

PRODUCT SERVICE
ENGINEER CONSULTATION
TRAINING

Copyright ©2021 DEWALT. The following are trademarks for one or more DEWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool. ICDWCCUANCHSS

GUARANTEED TOUGH.®

1-800-4-DEWALT

www.DEWALT.com