

DEWALT



**ANCHORS
MADE IN
THE USA**



DEWALT[®]

ANCHORS & FASTENERS



CCU+[™] CRITICAL CONNECTION UNDERCUT ANCHORING SYSTEM

When critical mechanical anchor connections are required consider the DEWALT[®] Critical Connection Undercut Anchor (CCU+[™]). The 3/8", 1/2", 5/8" or 3/4" CCU+[™] anchor range combined with Hollow Stop and Undercutting Bits, 60V MAX* rotary hammers and dust extractors for an OSHA Table 1 compliant cordless system. Available in 3 steel grades and all Made in the USA for Buy America Act construction projects.



*System is compliant to the Exposure Control Methods described in Table 1 of 29 CFR 1926.1153 when outlined components are operating and maintained in accordance to manufacturer's instructions.

ICC-ES ESR-4810

HEAVY DUTY UNDERCUT ANCHORS

CCU+™

TYPICAL APPLICATIONS

- 100% Made in the USA
- Beam, column and post anchorages
- Safety related attachments and assemblies
- Industrial facilities and treatment works
- Transportation structures
- Equipment supports and utility systems
- Barriers, guards and railing mounts
- Seismic qualification (SDC A – F)
- Tension zone / cracked concrete
- Meets BAA, AIS, BABA, and Buy America

AVAILABLE IN CARBON AND STAINLESS STEEL

Anchors are available in standard and high strength zinc plated carbon steel and high strength 316 stainless steel for exterior or high corrosion applications.

PRESET AND THRUBOLT VERSIONS

Provide installation flexibility and the heavy-wall expansion sleeve contributes to improved shear performance particularly for the thrubolt version.



SPECIFICATIONS

CARBON STEEL	ASTM A36, Zinc Plated
HIGH STRENGTH CARBON STEEL	ASTM A193, Grade B7, Zinc Plated
HIGH STRENGTH 316 STAINLESS STEEL	ASTM A193, Grade B8M CLASS 2
COUNTRY OF ORGIN	USA
CODE REPORT	ICC-ES ESR-4810
APPROVALS	Cracked Concrete, Seismic, Wind



WORKS WITH THE DUST-X+™ INSTALLATION SYSTEM

Fully integrated installation system that incorporates HEPA/RRP dust extractors with automatic filter cleaning, hollow bits and rotary hammers with wireless tool control for an OSHA Table 1 compliant solution for dust control.



DIAMETER AND LENGTH	ANCHOR VERSION	A36 CARBON STEEL	GRADE B7 HIGH-STRENGTH CARBON STEEL	HIGH-STRENGTH 316 STAINLESS STEEL	PACK
3/8" X 6"	PRESET	DFM1311050	DFM1371050	DFM1361050	20
	THRUBOLT	DFM1311550	DFM1371050	DFM1361050	20
1/2" X 7-1/2"	PRESET	DFM1311100	DFM1371100	DFM1361100	12
	THRUBOLT	DFM1311600	DFM1371600	DFM1361600	12
1/2" X 8-1/4"	PRESET	DFM1311150	DFM1371150	DFM1361150	12
	THRUBOLT	DFM1311650	DFM1371650	DFM1361650	12
5/8" X 10-3/4"	PRESET	DFM1311200	DFM1371200	DFM1361200	10
	THRUBOLT	DFM1311700	DFM1371700	DFM1361700	10
5/8" X 11-1/2"	PRESET	DFM1311250	DFM1371250	DFM1361250	10
	THRUBOLT	DFM1311750	DFM1371750	DFM1361750	10
3/4" X 14"	PRESET	DFM1311300	DFM1371300	DFM1361300	6
	THRUBOLT	DFM1311800	DFM1371800	DFM1361800	6
3/4" X 16"	PRESET	DFM1311350	DFM1371350	DFM1361350	6
	THRUBOLT	DFM1311850	DFM1371850	DFM1361850	6

WEDGE ANCHORS

DOMESTIC POWER-STUD®+ SD1

TYPICAL APPLICATIONS

- 100% Made in the USA
- Structural connections, like beam and column anchorage
- Safety-related attachments
- Protective barriers and racking
- Tension zone applications, like cable trays and strut, pipe supports, fire sprinklers
- Seismic and wind loading
- Interior applications / low level corrosion environment
- Meets BAA, AIS, BABA, and Buy America

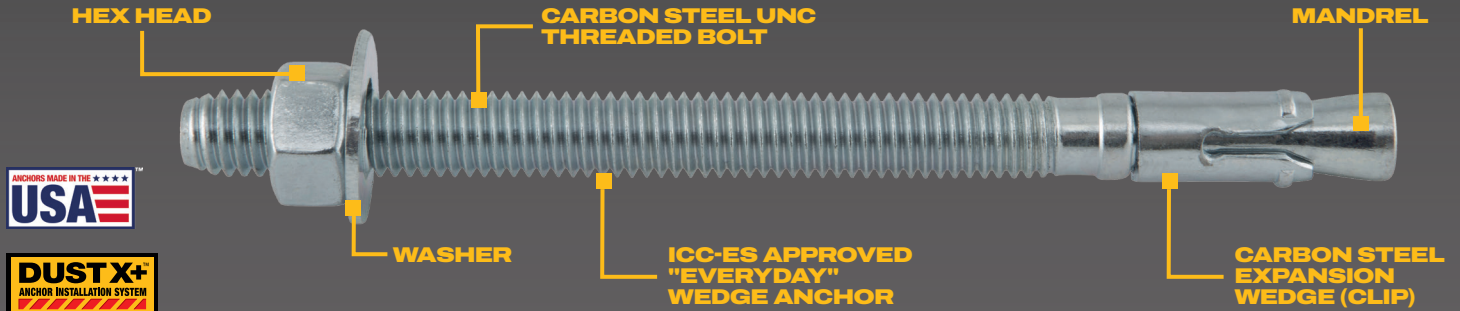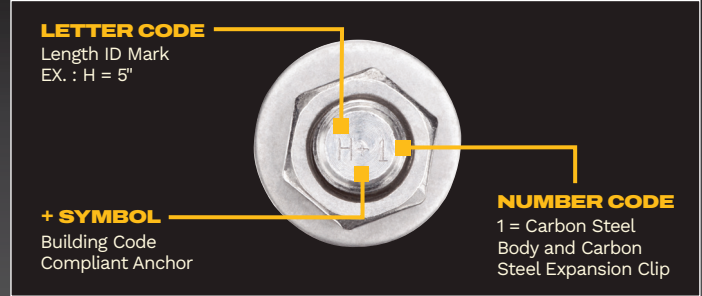

APPROVALS



ICC-ES ESR-2818 2024
Concrete 2021
ICC-ES ESR-2966 2018
Masonry 2015



Recognition in cracked and uncracked concrete including seismic and wind loading (Category 1 Anchors)



FM & UL listings:
www.DEWALT.com

BASE MATERIALS



Normal Weight
Concrete



Lightweight
Concrete



Concrete Over
Steel Deck



Grouted
Masonry

DOMESTIC POWER-STUD®+ SD1 PRODUCT DETAILS

CAT #	SIZE	THREAD LENGTH	BOX (QTY)	CS (QTY)
7400SD1USA-PWR*	1/4" X 1-3/4"	3/4"	100	600
7402SD1USA-PWR	1/4" X 2-1/4"	1-1/4"	100	600
7404SD1USA-PWR	1/4" X 3-1/4"	2-1/4"	100	600
7410SD1USA-PWR*	3/8" X 2-1/4"	7/8"	50	300
7412SD1USA-PWR*	3/8" X 2-3/4"	1-3/8"	50	300
7413SD1USA-PWR	3/8" X 3"	1-5/8"	50	300
7415SD1USA-PWR	3/8" X 3-3/4"	2-3/8"	50	300
7416SD1USA-PWR	3/8" X 5"	3-5/8"	50	300
7417SD1USA-PWR	3/8" X 7"	5-5/8"	50	200
7420SD1USA-PWR*	1/2" X 2-3/4"	1"	50	200
7422SD1USA-PWR	1/2" X 3-3/4"	2"	50	200
7423SD1USA-PWR	1/2" X 4-1/2"	2-3/4"	50	200
7424SD1USA-PWR	1/2" X 5-1/2"	3-3/4"	50	150
7426SD1USA-PWR	1/2" X 7"	5-1/4"	25	100
7427SD1USA-PWR	1/2" X 8-1/2"	6-3/4"	25	100

DOMESTIC POWER-STUD®+ SD1 PRODUCT DETAILS

CAT #	SIZE	THREAD LENGTH	BOX (QTY)	CS (QTY)
7430SD1USA-PWR*	5/8" X 3-1/2"	1-1/2"	25	100
7432SD1USA-PWR	5/8" X 4-1/2"	2-1/2"	25	100
7433SD1USA-PWR	5/8" X 5"	3"	25	100
7434SD1USA-PWR	5/8" X 6"	4"	25	75
7436SD1USA-PWR	5/8" X 7"	5"	25	75
7438SD1USA-PWR	5/8" X 8-1/2"	6-1/2"	25	50
7440SD1USA-PWR*	3/4" X 4-1/4"	1-3/4"	20	60
7441SD1USA-PWR	3/4" X 4-3/4"	2-1/4"	20	60
7442SD1USA-PWR	3/4" X 5-1/2"	3"	20	60
7444SD1USA-PWR	3/4" X 6-1/4"	3-3/4"	20	60
7446SD1USA-PWR	3/4" X 7"	4-1/2"	20	60
7448SD1USA-PWR	3/4" X 8-1/2"	6"	10	40


*Less than the minimum standard anchor length for Strength Design. Published length is the overall length of the anchor. Allow for fixture thickness plus one anchor diameter for the nut and washer thickness when selecting a length. Packaged with nuts and washers. Manual hand pump available (Cat. #08280-PWR). Hollow drill bits must be used with a dust extraction vacuum (e.g. Cat. #DW012, DW015).

STAINLESS STEEL WEDGE ANCHORS

DOMESTIC POWER-STUD®+ SD4

TYPICAL APPLICATIONS


- 100% Made in the USA
- Knurled mandrel - consistent performance in cracked concrete
- Interior and exterior applications
- Tension zone applications
- Seismic and wind loading
- UL Listed (See listing at www.DEWALT.com)
- Meets BAA, AIS, BABA, and Buy America

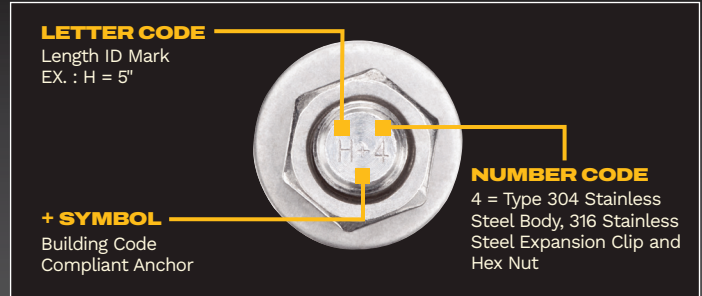

316 STAINLESS STEEL HEX HEAD NUT

304 STAINLESS STEEL THREADED BOLT

KNURLED MANDREL

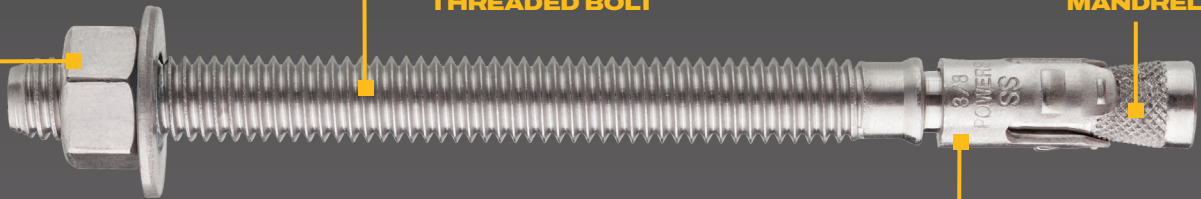

316 STAINLESS STEEL EXPANSION WEDGE (CLIP)



APPROVALS



ICC-ES ESR-2502
Concrete



2024
2021
2018
2015



Recognition in cracked and uncracked concrete including seismic and wind loading (Category 1 Anchors)

BASE MATERIALS



Normal Weight Concrete



Lightweight Concrete



Concrete Over Steel Deck



Grouted Masonry

DOMESTIC POWER-STUD®+ SD4 PRODUCT DETAILS

CAT #	SIZE	THREAD LENGTH	BOX (QTY)	CS (QTY)
7304SD4USA-PWR	1/4" X 3-1/4"	2-1/4"	100	600
7310SD4USA-PWR*	3/8" X 2-1/4"	7/8"	50	300
7313SD4USA-PWR	3/8" X 3"	1-5/8"	50	300
7315SD4USA-PWR	3/8" X 3-3/4"	2-3/8"	50	300
7316SD4USA-PWR	3/8" X 5"	3-5/8"	50	300
7317SD4USA-PWR	3/8" X 7"	3/8" X 7"	50	200
7320SD4USA-PWR*	1/2" X 2-3/4"	1"	50	200
7322SD4USA-PWR	1/2" X 3-3/4"	2"	50	200
7323SD4USA-PWR	1/2" X 4-1/2"	2-3/4"	50	200
7324SD4USA-PWR	1/2" X 5-1/2"	3-3/4"	50	150
7326SD4USA-PWR	1/2" X 7"	5-1/4"	25	100

DOMESTIC POWER-STUD®+ SD4 PRODUCT DETAILS

CAT #	SIZE	THREAD LENGTH	BOX (QTY)	CS (QTY)
7330SD4USA-PWR*	5/8" X 3-1/2"	1-1/2"	25	100
7332SD4USA-PWR	5/8" X 4-1/2"	2-1/2"	25	100
7333SD4USA-PWR	5/8" X 5"	3"	25	100
7334SD4USA-PWR	5/8" X 6"	4"	25	75
7336SD4USA-PWR	5/8" X 7"	4"	25	75
7338SD4USA-PWR	5/8" X 8-1/2"	6-1/2"	25	50
7340SD4USA-PWR*	3/4" X 4-1/4"	1-7/8"	20	60
7341SD4USA-PWR*	3/4" X 4-3/4"	2-3/8"	20	60
7342SD4USA-PWR	3/4" X 5-1/2"	3-1/8"	20	60
7344SD4USA-PWR	3/4" X 6-1/4"	3-7/8"	20	60
7346SD4USA-PWR	3/4" X 7"	4-5/8"	20	60
7348SD4USA-PWR	3/4" X 8-1/2"	6-1/8"	10	40
7349SD4USA-PWR	3/4" X 10"	7-5/8"	10	40

*Less than the minimum standard anchor length for Strength Design. Published length is the overall length of the anchor. Allow for fixture thickness plus one anchor diameter for the nut and washer thickness when selecting a length. Packaged with nuts and washers. Manual hand pump available (Cat. #08280-PWR). Hollow drill bits must be used with a dust extraction vacuum (e.g. Cat. #DW012, DW015).

STAINLESS STEEL WEDGE ANCHORS

DOMESTIC POWER-STUD®+ SD6

TYPICAL APPLICATIONS


- 100% Made in the USA
- Knurled mandrel - consistent performance in cracked concrete
- Corrosion resistant stainless steel
- Tension zone applications
- Seismic and wind loading
- UL Listed for sprinklers (See listing at www.DEWALT.com)
- Meets BAA, AIS, BABA, and Buy America



**316 STAINLESS STEEL
HEX HEAD NUT**

**316 STAINLESS STEEL
UNC THREADED BOLT**

**KNURLED
MANDREL**

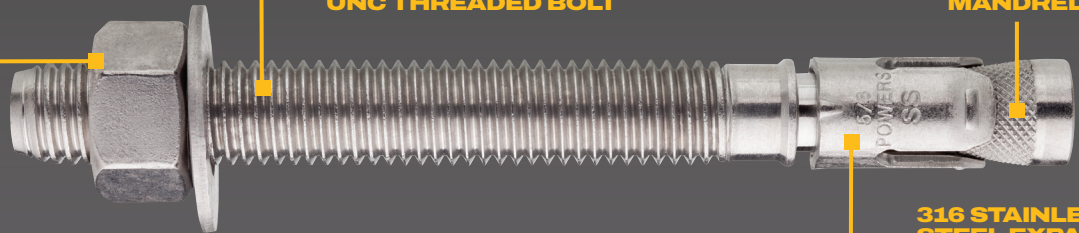

**316 STAINLESS
STEEL EXPANSION
WEDGE (CLIP)**



APPROVALS



ICC-ES ESR-2502
Concrete



2024
2021
2018
2015



Recognition in cracked and uncracked
concrete including seismic and wind loading
(Category 1 Anchors)

BASE MATERIALS



Normal Weight
Concrete



Lightweight
Concrete



Concrete Over
Steel Deck



Grouted
Masonry

DOMESTIC POWER-STUD®+ SD6 PRODUCT DETAILS

CAT #	SIZE	THREAD LENGTH	BOX (QTY)	CS (QTY)
7604SD6USA-PWR	1/4" X 3-1/4"	2-1/4"	100	600
7610SD6USA-PWR*	3/8" X 2-1/4"	7/8"	50	300
7612SD6USA-PWR	3/8" X 2-3/4"	1-3/8"	50	300
7613SD6USA-PWR	3/8" X 3"	1-5/8"	50	300
7614SD6USA-PWR	3/8" X 3-1/2"	2-1/8"	50	300
7615SD6USA-PWR	3/8" X 3-3/4"	2-3/8"	50	300
7616SD6USA-PWR	3/8" X 5"	3-5/8"	50	300
7617SD6USA-PWR	3/8" X 7"	5-5/8"	50	200
7620SD6USA-PWR*	1/2" X 2-3/4"	1"	50	200
7622SD6USA-PWR	1/2" X 3-3/4"	2"	50	200
7623SD6USA-PWR	1/2" X 4-1/2"	2-3/4"	50	200
7624SD6USA-PWR	1/2" X 5-1/2"	3-3/4"	50	150
7626SD6USA-PWR	1/2" X 7"	5-1/4"	25	100

DOMESTIC POWER-STUD®+ SD6 PRODUCT DETAILS

CAT #	SIZE	THREAD LENGTH	BOX (QTY)	CS (QTY)
7630SD6USA-PWR*	5/8" X 3-1/2"	1-1/2"	25	100
7632SD6USA-PWR	5/8" X 4-1/2"	2-1/2"	25	100
7633SD6USA-PWR	5/8" X 5"	3"	25	100
7634SD6USA-PWR	5/8" X 6"	4"	25	75
7636SD6USA-PWR	5/8" X 7"	5"	25	75
7638SD6USA-PWR	5/8" X 8-1/2"	6-1/2"	25	50
7640SD6USA-PWR*	3/4" X 4-1/4"	1-7/8"	20	60
7641SD6USA-PWR*	3/4" X 4-3/4"	2-3/8"	20	60
7642SD6USA-PWR	3/4" X 5-1/2"	3-1/8"	20	60
7644SD6USA-PWR	3/4" X 6-1/4"	3-7/8"	20	60
7646SD6USA-PWR	3/4" X 7"	4-5/8"	20	60
7648SD6USA-PWR	3/4" X 8-1/2"	6-1/8"	10	40


*Less than the minimum standard anchor length for Strength Design. Published length is the overall length of the anchor. Allow for fixture thickness plus one anchor diameter for the nut and washer thickness when selecting a length. Packaged with nuts and washers. Manual hand pump available (Cat. #08280-PWR). Hollow drill bits must be used with a dust extraction vacuum (e.g. Cat. #DW012, DW015).

DROP-IN ANCHORS


DOMESTIC STEEL DROPIN™

TYPICAL APPLICATIONS


- 100% Made in the USA
- Internally threaded anchor for easy bolt removability and service work
- Smooth wall dropin can be installed flush mounted or below the base material surface
- UL Listed and FM Approved for fire sprinklers (See listing at www.DEWALT.com)
- Meets BAA, AIS, BABA, and Buy America

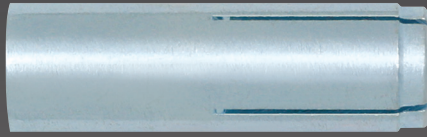

CARBON STEEL SMOOTH WALL DROPIN™

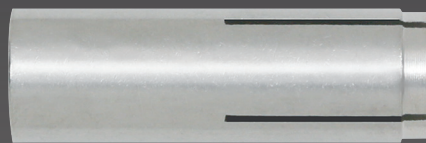

TYPE 300 SERIES STAINLESS STEEL DROPIN™

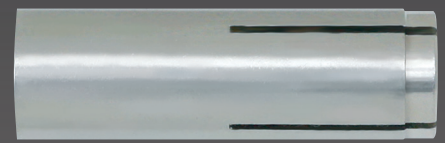

TYPE 316 SERIES STAINLESS STEEL DROPIN™



APPROVALS



Federal GSA Specification
Meets the descriptive requirements CID A-A 55614



Full FM & UL listings: www.DEWALT.com

BASE MATERIALS



Normal Weight Concrete



Lightweight Concrete



Concrete Over Steel Deck

DOMESTIC CARBON STEEL SMOOTH WALL DROPIN™ PRODUCT DETAILS

CAT #	SIZE	THREAD LENGTH	DIAMETER	BOX (QTY)	CS (QTY)
6304USA-PWR	1/4"	1"	3/8"	100	1,000
6306USA-PWR	3/8"	1-9/16"	1/2"	50	500
6308USA-PWR	1/2"	2"	5/8"	50	300
6320USA-PWR	5/8"	2-1/2"	7/8"	25	125
6312USA-PWR	3/4"	3-13/16"	1"	10	50

DOMESTIC TYPE 300 SERIES STAINLESS STEEL DROPIN™ PRODUCT DETAILS

CAT #	SIZE	THREAD LENGTH	DIAMETER	BOX (QTY)	CS (QTY)
6204USA-PWR	1/4"	1"	3/8"	100	1,000
6206USA-PWR	3/8"	1-9/16"	1/2"	50	500
6208USA-PWR	1/2"	2"	5/8"	50	300
6210USA-PWR	5/8"	2-1/2"	7/8"	25	125
6212USA-PWR	3/4"	3-13/16"	1"	10	50

DOMESTIC TYPE 316 SERIES STAINLESS STEEL DROPIN™ PRODUCT DETAILS

CAT #	SIZE	THREAD LENGTH	DIAMETER	BOX (QTY)	CS (QTY)
6224USA-PWR	1/4"	1"	3/8"	100	1,000
6226USA-PWR	3/8"	1-9/16"	1/2"	50	500
6228USA-PWR	1/2"	2"	5/8"	50	300
6230USA-PWR	5/8"	2-1/2"	7/8"	25	125
6232USA-PWR	3/4"	3-13/16"	1"	10	50

CHEMICAL ANCHORING

PURE220+™

DESCRIPTION

Pure220+™ is a two-component, standard curing, ultra high strength adhesive anchoring system. It is designed for bonding threaded rod and reinforcing bar hardware into drilled holes in concrete base materials and for post-installed reinforcing bar connections (rebar development). Meets BAA, BABA, and Buy America.



APPROVALS



ICC-ES ESR-5144 Concrete
Cracked and uncracked concrete including seismic and wind loading
Conforms to requirements of ASTM C881 including C882 and AASHTO M235, Types I, II, IV and V, Grade 3, Classes B & C
Compliant with NSF/ANSI 61 for drinking water system components
Department of Transportation listings

BASE MATERIALS





Normal Weight Concrete



Lightweight Concrete



Grouted Masonry

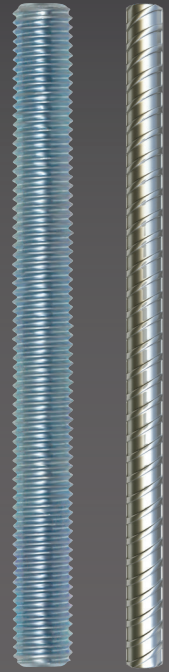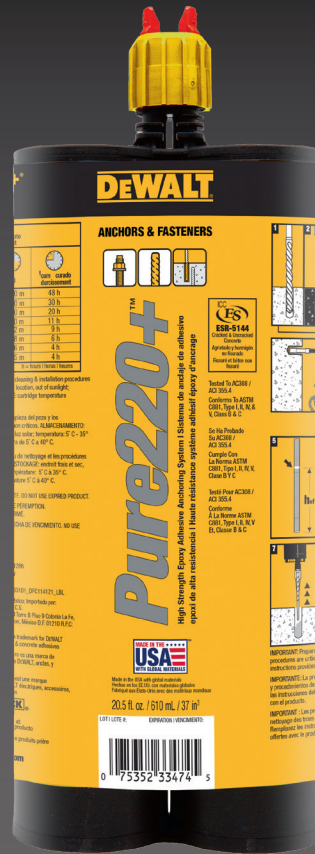

PURE220+™ CARTRIDGES (1:1 MIX RATIO)

CAT #	DESCRIPTION	PACK	PALLET
DFC114110	PURE220+ 9.5 FL. OZ. QUICK-SHOT CARTRIDGE	12	846
DFC114121	PURE220+ 20.5 FL. OZ. DUAL CARTRIDGE	12	720

CARTRIDGES SYSTEM MIXING NOZZLES AND NOZZLE EXTENSIONS

CAT #	DESCRIPTION	PACK	CTN
PFC1641600	MIXING NOZZLE (WITH 8" EXTENSION)	2	24
08609-PWR	HIGH FLOW MIXING NOZZLE (WITH 8" EXTENSION)	2	24
08281-PWR	MIXING NOZZLE EXTENSION 8" LONG	2	24
08297-PWR	MIXING NOZZLE EXTENSION 20" LONG	1	12
PFC1640600	FLEXIBLE EXTENSION HOSE 25 FT. (5/8" O. D.)	1	12

DISPENSING TOOLS FOR INJECTION ADHESIVE

CAT #	DESCRIPTION	PACK	CTN
08437-PWR	MANUAL CAULKING GUN FOR QUICK-SHOT CARTRIDGE	1	12
DCE560D1	CORDLESS 20V BATTERY POWERED DISPENSING TOOL FOR QUICK-SHOT	1	-
08409-PWR	20.5 FL. OZ. STANDARD METAL MANUAL TOOL	1	10
DCE591B	20.5 FL. OZ. CORDLESS 20V BATTERY POWERED DISPENSING TOOL (BARE)	1	-
DCE591D1	20.5 FL. OZ. CORDLESS 20V BATTERY POWERED DISPENSING TOOL (KIT)	1	-
08459-PWR	20.5 FL. OZ. PNEUMATIC TOOL	1	-

A PFC1641600 mixing nozzle is packaged with each cartridge.
Pure220+ mixing nozzles must be used to ensure complete and proper mixing of the adhesive.
Pure220+ adhesive cartridges are Made in the USA. Installation accessories are globally sourced.

CHEMICAL ANCHORING

PURE110+®

DESCRIPTION

Pure110+® is a two-component, standard curing, high strength adhesive anchoring system. It is designed for bonding threaded rod and reinforcing bar hardware into drilled holes in concrete base materials and for post-installed reinforcing bar connections (rebar development). Meets BAA, BABA, and Buy America.



APPROVALS



ICC-ES ESR-3298 Concrete
Cracked and uncracked concrete including seismic and wind loading
Conforms to requirements of ASTM C881 including C882 and AASHTO M235, Types I, II, IV and V, Grade 3, Classes B & C
Compliant with NSF/ANSI 61 for drinking water system components
Department of Transportation listings

BASE MATERIALS




Normal Weight Concrete



Lightweight Concrete



Grouted Masonry

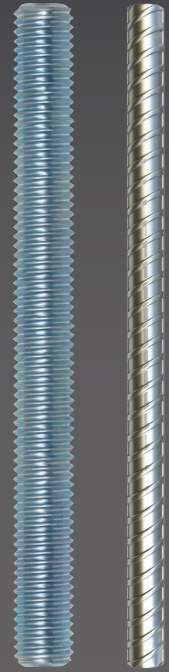

PURE110+® CARTRIDGES (1:1 MIX RATIO)

CAT #	DESCRIPTION	PACK	PALLET
08310SD-PWR	PURE110+ 9.5 FL. OZ. QUICK-SHOT CARTRIDGE	12	432
083221SD-PWR	PURE110+ 20.5 FL. OZ. DUAL CARTRIDGE	12	540

CARTRIDGES SYSTEM MIXING NOZZLES AND NOZZLE EXTENSIONS

CAT #	DESCRIPTION	PACK	CTN
PFC1641600	MIXING NOZZLE (WITH 8" EXTENSION)	2	24
08609-PWR	HIGH FLOW MIXING NOZZLE (WITH 8" EXTENSION)	2	24
08281-PWR	MIXING NOZZLE EXTENSION 8" LONG	2	24
08297-PWR	MIXING NOZZLE EXTENSION 20" LONG	1	12
PFC1640600	FLEXIBLE EXTENSION HOSE 25 FT. (5/8" O. D.)	1	12

DISPENSING TOOLS FOR INJECTION ADHESIVE

CAT #	DESCRIPTION	PACK	CTN
08437-PWR	MANUAL CAULKING GUN FOR QUICK-SHOT CARTRIDGE	1	12
DCE560D1	CORDLESS 20V BATTERY POWERED DISPENSING TOOL FOR QUICK-SHOT	1	-
08409-PWR	20.5 FL. OZ. STANDARD METAL MANUAL TOOL	1	10
DCE591D1	20.5 FL. OZ. CORDLESS 20V BATTERY POWERED DISPENSING TOOL (KIT)	1	-
08459-PWR	20.5 FL. OZ. PNEUMATIC TOOL	1	-

A PFC1641600 mixing nozzle is packaged with each 9.5 oz. cartridge and a 08609-PWR is included with each 20.5 oz. cartridge. Pure110+ mixing nozzles must be used to ensure complete and proper mixing of the adhesive. Pure110+ adhesive cartridges are Made In the USA. Installation accessories are globally sourced.

CHEMICAL ANCHORING

PURE50+™

DESCRIPTION

Pure50+™ is a two-component, standard curing, adhesive anchoring system. It is designed for bonding threaded rod and reinforcing bar hardware into drilled holes in solid concrete base materials. It can also be considered for bonding together cured concrete and masonry materials, as well as filling large cracks and abandoned holes. Meets BAA, BABA, and Buy America.



APPROVALS



ICC-ES ESR-3576 Concrete
 Conforms to requirements of ASTM C881 including C882 and AASHTO M235, Types I, II, IV and V, Grade 3, Classes B & C
 Compliant with NSF/ANSI 61 for drinking water system components
 Department of Transportation listings


BASE MATERIALS



Normal Weight Concrete



Lightweight Concrete

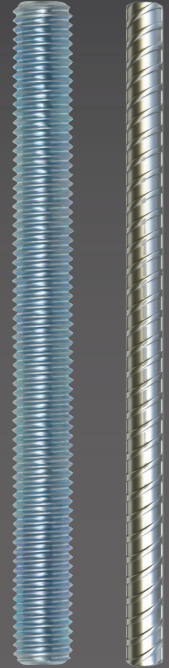

PURE50+™ CARTRIDGES

CAT #	DESCRIPTION	PACK	PALLET
08600-PWR	PURE50+ 9.5 FL. OZ. QUICK-SHOT CARTRIDGE	12	432
08605-PWR	PURE50+ 20.5 FL. OZ. CARTRIDGE	12	540

CARTRIDGES SYSTEM MIXING NOZZLES AND NOZZLE EXTENSIONS

CAT #	DESCRIPTION	PACK	CTN
PFC1641600	MIXING NOZZLE (WITH 8" EXTENSION) FOR PURE50+ QUICK SHOT	1	12
08609-PWR	HIGH FLOW MIXING NOZZLE (WITH 8" EXTENSION)	2	24
08281-PWR	MIXING NOZZLE EXTENSION 8" LONG	2	24
08297-PWR	MIXING NOZZLE EXTENSION 20" LONG	1	12

DISPENSING TOOLS FOR INJECTION ADHESIVE

CAT #	DESCRIPTION	PACK	CTN
08437-PWR	MANUAL CAULKING GUN FOR QUICK-SHOT CARTRIDGE	1	12
DCE560D1	CORDLESS 20V BATTERY POWERED DISPENSING TOOL FOR QUICK-SHOT	1	-
08409-PWR	20.5 FL. OZ. STANDARD METAL MANUAL TOOL	1	10
DCE591D1	20.5 FL. OZ. CORDLESS 20V BATTERY POWERED DISPENSING TOOL (BARE)	1	-
08459-PWR	20.5 FL. OZ. PNEUMATIC TOOL	1	-

A PFC1641600 mixing nozzle is packaged with each 9.5 oz. cartridge and a 08609-PWR is included with each 20.5 oz. cartridge. Pure50+ mixing nozzles must be used to ensure complete and proper mixing of the adhesive.



DESIGN



COMPARE





DOCUMENT



ANCHOR

CODE COMPLIANCES

- ACI 318-19
- ACI 318-14
- CSA A23.3-19
- CSA A23.3-14

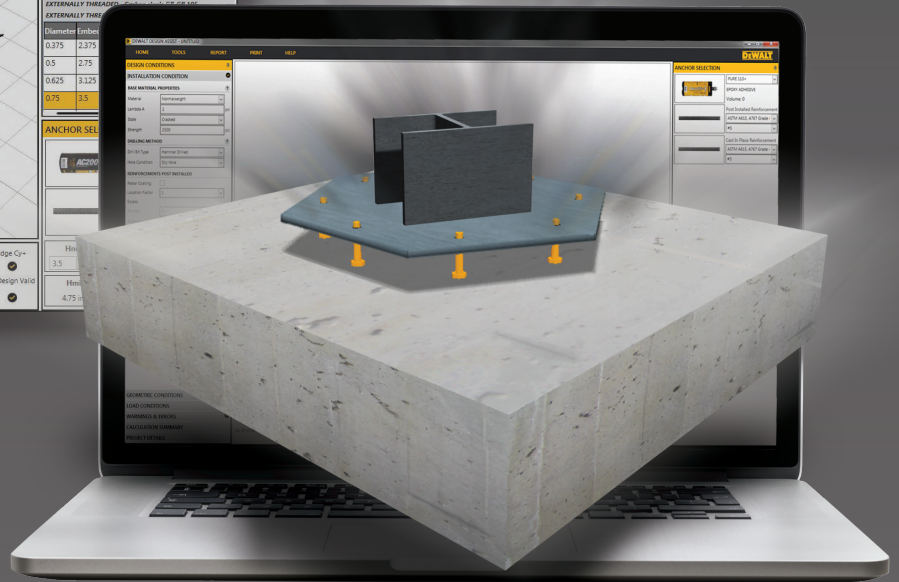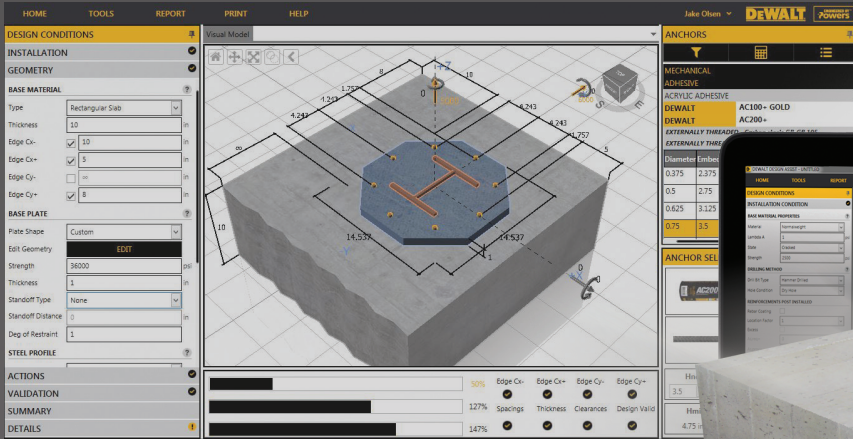

ANCHOR TYPES



MECHANICAL



ADHESIVES



CAST-IN-PLACE

WORLD-CLASS ANCHOR DESIGN SOFTWARE

BUILDING WITH STEEL AND CONCRETE TAKES VISION, POWER, AND STRUCTURAL DESIGN WITHOUT LIMITS.

DEWALT DESIGN ASSIST™ (DDA) is a no cost/no fee state-of-the-art structural design software that streamlines, automates, and optimizes your concrete anchoring design process. With multiple design standards to choose from, a comprehensive library of anchors, numerous reporting options, and a wide range of design tools, simplify your design process with DEWALT DESIGN ASSIST™.

DOWNLOAD THE FULL FREE SUITE AT DEWALT.COM/DDA

DEWALT®

ANCHORS & FASTENERS

