

**DEWALT**<sup>®</sup>

**ANCHORS & FASTENERS**

**Cast-In-Place  
Concrete Inserts**

**CODE LISTED**

**ICC-ES ESR-3958**



**CRACKED & UNCRACKED CONCRETE**

**DEWALT Deck Insert<sup>™</sup> + (DDI<sup>™</sup> +)**



# DEWALT®

## ANCHORS & FASTENERS

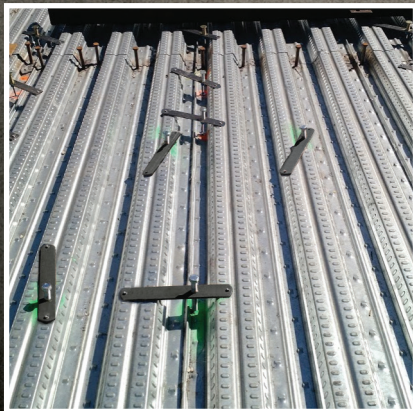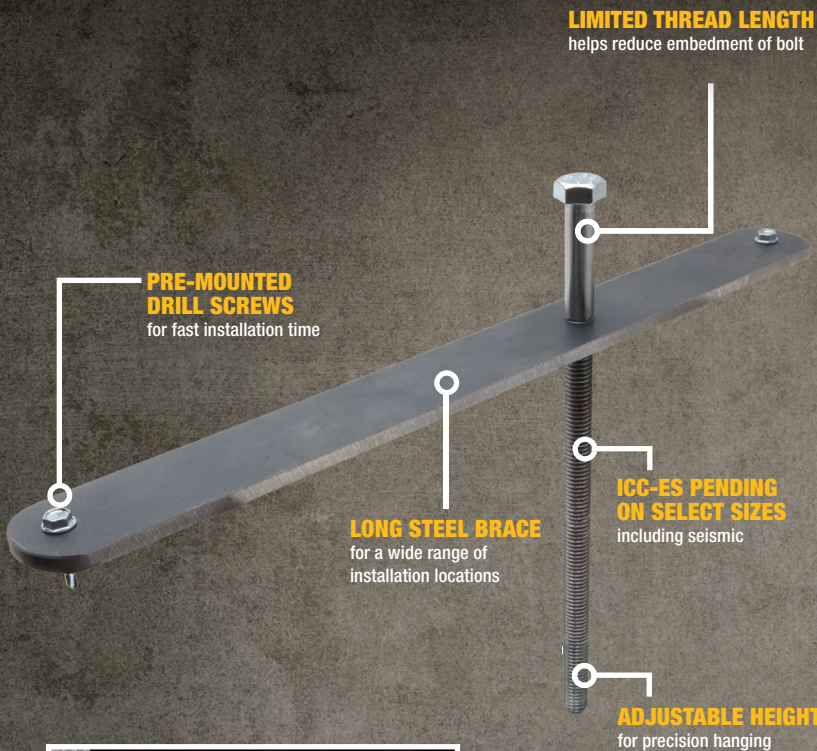

# DeWALT Deck Insert™ + (DDI™ +) Cast-In-Place Concrete Inserts



### Metal Deck Insert

CATALOG NUMBER	ANCHOR SIZE	ROD DIA	DRILL DIA	QTY
PFM2511100	3/8"	3/8"	7/16"	20
PFM2511110	1/2"	1/2"	9/16"	20
PFM2511120	5/8"	5/8"	11/16"	20
PFM2511130	3/4"	3/4"	13/16"	12
PFM2511140	7/8"	7/8"	15/16"	12

### Rod Coupling Nuts - Zinc

CATALOG NUMBER	DESCRIPTION	ROD DIA	HEX DIA	QTY	MASTER QTY.
030007	3/8"-16 x 1/2" x 1-1/8"	3/8"	1/2"	100	1000
030009	1/2"-13 x 5/8" x 1-1/4"	1/2"	5/8"	50	500
030010	5/8"-13 x 13/16" x 2-1/8"	5/8"	13/16"	25	250
030011	3/4"-13 x 1" x 2-1/4"	3/4"	1	25	250
030012	7/8"-13 x 1-1/4" x 2-1/2"	7/8"	1-1/4"	10	100

### Installation Systems

CATALOG NUMBER	DESCRIPTION	Image
DCD996P2	20V MAX* XR® Lithium Ion Brushless 3-Speed Drill	
DCF887M2	20V MAX* XR® 1/4" 3-Speed Impact Driver Kit (4.0 AH)	
DWD220	1/2" VSR Pistol Grip Drill with E-Clutch® Anti-Lock Control	
D180014IR	7/8" Impact Ready® Hole Saw	
DWA1786IR	3/16"-7/8" Impact Ready® Step Drill Bit	
DW2218IR	1/4" x 1-7/8" Impact Ready® Magnetic Nut Driver	
DWA2221IR	1/4" Impact Ready® Cleanable Nut Driver	

\* Maximum initial voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

# 1-800-4 DEWALT®

www.DEWALT.com