




ANCHORS & FASTENERS

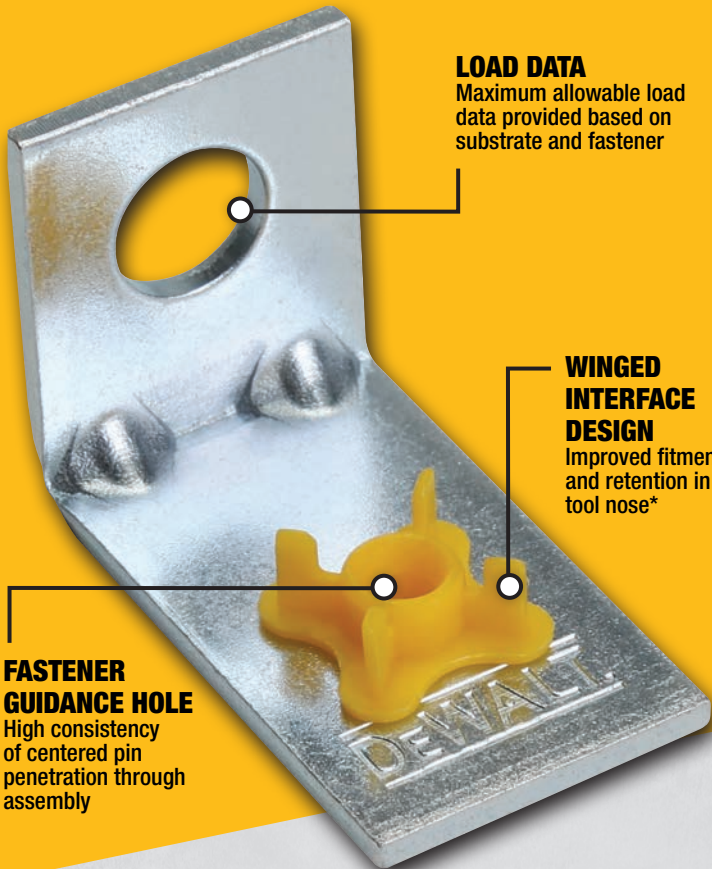


TYPICAL APPLICATIONS


- Install lathe, sheathing or insulation as surface preparation
- Fasten wire or pencil rod to suspended ceiling grids or light fixtures
- Fasten rebar, BX cables and conduit fixtures
- Attach duct straps
- Create temporary anchor points for wire strapping

*Compared to usage of previous Powers STICK-E with CCN and C5 tools.

CLIP STYLES

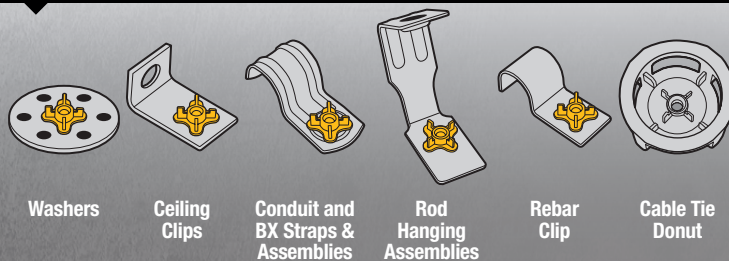

BASE MATERIALS



DIRECT FASTENING ACCESSORIES

STICK-E™

STICK-E™ DIRECT FASTENING APPLICATIONS AND ALLOWABLE LOADS

TRADE	APPLICATION	STICK-E		BASE MATERIAL	FASTENER		MIN. EMBEDMENT	ALLOWABLE LOAD (LB)*
MASONRY & SURFACE PREP	Installing Wire Lathe For Stucco Or Surfacing Applications	DFD405101	Lathing Washer 1"		DCN890075 / 55310-PWR	3/4" x .102"	5/8"	70
					DCN8907804 / 55341-PWR	.780" X .102" / .088"		
					DCN890075 / 55310-PWR	3/4" x .102"	5/8"	70
					DCN8907804 / 55341-PWR	.780" x .102" / .088"		
	Hanging Rigid Exterior Foam Insulation (1/2" Thick)	DFD405716	Insulation Washer 1-7/16"		DCN890100 / 55310-PWR	1" x .102"	5/8"	30
					DCN890125 / 55341-PWR	1-1/4" x .102"		
					DCN890100 / 55310-PWR	1" x .102"	5/8"	30
					DCN890125 / 55341-PWR	1-1/4" X .102"		
MECHANICAL & ELECTRICAL	Fastening wire or pencil rod to suspend ceiling grids or light fixtures	DFD405550	Right Angle Clip		DCN890075 / 55310-PWR	3/4" x .102"	5/8"	90
					DCN8907804 / 55341-PWR	.780" X .102" / .088"		
	Attaching 3/8" diameter flexible BX cable vertical or overhead	DFD405338	BX Strap 3/8"		DCN890075 / 55310-PWR	3/4" x .102"	5/8"	10
					DCN8907804 / 55341-PWR	.780" X .102" / .088"		
					DCN890075 / 55310-PWR	3/4" x .102"	5/8"	10
					DCN8907804 / 55341-PWR	.780" X .102" / .088"		
	Creating a vertical or overhead anchor point for temporary lighting or wire strapping?	DFD405902	Cable Tie Donut		DCN890075 / 55310-PWR	3/4" x .102"	5/8"	10
					DCN8907804 / 55341-PWR	.780" X .102" / .088"		
SHEET METAL	Attach duct straps to suspend HVAC onto ceilings	DFD405112	Metal Washer 1/2"		DCN890075 / 55310-PWR	3/4" x .102"	5/8"	90
					DCN8907804 / 55341-PWR	.780" X .102" / .088"		

1. Allowable load capacities listed are calculated using an applied safety factor of 5.0 2. Straps include zip-tie or hook-and-loop

STICK-E™ ACCESSORIES NOW AVAILABLE

CAT #	DESCRIPTION	CTN	MSTR
DFD405101	Lathing Washer 1"	100	1000
DFD405550	Right Angle Ceiling Clip	100	1000
DFD405338	BX Strap 3/8"	100	1000
DFD405716	Insulation Washer 1-7/16"	100	1000
DFD405112	Metal Washer 1/2"	100	1000
DFD405902	Cable Tie Donut	100	1000

STICK-E™ ACCESSORIES COMING SOON

CAT #	DESCRIPTION	POWERS CAT #	CTN	MSTR
DFD405312R	Conduit Strap 1/2" Ribbed	55059	100	1000
DFD405334R	Conduit Strap 3/4" Ribbed	55061	100	1000
DFD405310R	Conduit Strap 1" Ribbed	55063	100	1000
DFD405412	Conduit Clip 1/2"	55064	50	200
DFD405434	Conduit Clip 3/4"	55066	50	200
DFD405410	Conduit Clip 1"	55068	50	100
DFD405214	Rod Hanger 1/4"	55050	100	1000
DFD405238	Rod Hanger 3/8"	55052	100	1000
DFD405300	Universal Rebar Clip	55070	100	1000
DFD405610	Square Washer 1"	55149	100	1000
DFD405901	Fiberglass Sheathing Washer	55157	250	2500
DFD405102	Stainless Steel Sealing Washer	55043	100	1000
DFD405100	Lathing Washer	55012	100	1000
DFD405530	30 Degree Ceiling Clip	New	100	1000
DFD405215	Post Nut Rod Hanger 1/4"	New	100	1000
DFD405239	Post Nut Rod Hanger 3/8"	New	100	1000



➤ Metal lathe installation with DFD405101

RELATED PRODUCTS



DCN890
20V MAX* XR® CORDLESS
CONCRETE NAILER



DCN891
20V MAX* XR® 1" MAGAZINE
CORDLESS CONCRETE NAILER



DCN8902
MAGNETIC STICK-E™
CONTACT TRIP



DCN8903
STANDARD STICK-E™
CONTACT TRIP



DCN8905
POLE TOOL

For 20V MAX Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

1-800-4-DEWALT

www.DEWALT.com

Copyright ©2021 DeWALT. The following are trademarks for one or more DeWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

ICDWSTICKEANCHSS