



**DEWALT**®

ENGINEERED BY **Powers**™

## Overhead Anchoring

- 3/4" Embedment
- Flush Mounted
- Internally Threaded
- For Cracked and Uncracked Concrete

### CODE LISTED

ICC-ES ESR-3912

CRACKED & UNCRACKED  
CONCRETE

**Mini-Undercut+**™





ENGINEERED BY **Powers**™

Post Tension Concrete



Hollow Core Concrete



**CODE APPROVED**

3/4" long approved seismic anchor

**PATENT PENDING GEOMETRY**


patent pending design bites into concrete for undercut

**STOP BIT**

widened shoulder eliminates potential for over drilling; solid carbide head for quick drilling

**THREADED SLEEVE**

internally tapped sleeve provides full thread engagement

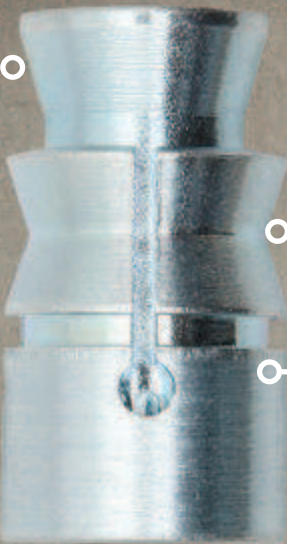

**SDS+ SETTING TOOL** for fast installation



# Mini-Undercut+™

## Internally Threaded Undercut Anchor



**Mini-Undercut+**

CATALOG NUMBER	ANCHOR SIZE	ROD DIA	DRILL DIA	QTY	MASTER QTY
PFM2111820	3/8" x 3/4"	3/8"	5/8"	100	600

CATALOG NUMBER	USE ACCU-BIT	USE SDS+ SETTING TOOL
PFM2111820	PPA2431720	PFM2101720

**Accu-Bit**

CATALOG NUMBER	STOP BIT SIZE	ROD DIA	DRILL DIA	DRILL DEPTH	QTY
PPA2431720	5/8" x 3/4"	3/8"	5/8"	3/4"	1

**SDS+ Setting Tool**

CATALOG NUMBER	SETTING TOOL SIZE	ROD DIA	QTY
PFM2101720	3/8" SDS+ Setting Tool	3/8"	1

**Installation Systems**

CATALOG NUMBER	DESCRIPTION
DCH273P2	20V MAX* XR Brushless 1" L-shape SDS Plus Rotary Hammer Kit 

\* Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

Dealer Stamp

**1-800-4 DEWALT**

**www.DEWALT.com**