


ENGINEERED BY POWERS

ICC-ES APPROVED

3/4" long approved seismic anchor

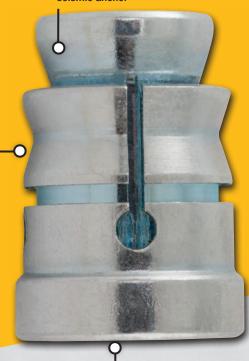


THREADED SLEEVE

internally tapped sleeve provides full thread engagement

TYPICAL APPLICATIONS

- Tension zones, seismic and wind loading applications
- Suspended conduit and lighting
- Tension zone applications, i.e., cable trays and strut, pipe supports, fire sprinkler
- Ideal for precast hollow-core plank and post-tensioned concrete slabs
- Cracked concrete tested alternative to a Mini Drop-In anchor



APPROVALS

PATENT PENDING

concrete for undercut

GEOMETRY

patent pending

design bites into



ESR-3912 Concrete







Recognition in cracked and uncracked concrete including seismic and wind loading (Category 1 Anchors)



Full FM listings: www DEWALT.com

BASE MATERIALS





Tension Concrete Hollow

Wei Cond Light Weight Concret

INTERNALLY THREADED UNDERCUT ANCHOR

Mini Undercut+[™]

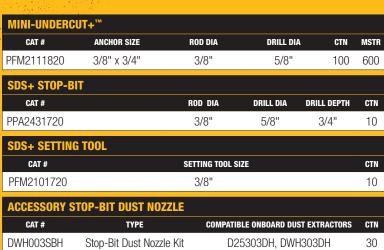

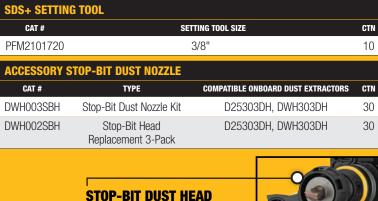

OSHA TABLE-1 COMPLIANT



VISIT DEWALT.COM/HANGERWORKS **FOR MORE INFORMATION**



INSTALLATION SYSTEM



DCH273P2DH0

20V MAX* XR BRUSHLESS 1" L-SHAPE SDS PLUS ROTARY HAMMER KIT

INCLUDES:

Dust Extractor

New Stop-Bit Nozzle Dust Head DWH003SBH (fits Mini-Undercut+ Stop-Bit) (2) DCB205 5.0 Ah batteries and Charger 360° Side Handle

Depth Rod

Utility Hook



DWH003SBH

STOP BIT HEAD NOZZLE KIT ALSO AVAILABLE AS AN ACCESSORY

For use with Onboard Dust Extractors for an OSHA Table-1 compliant solution

1-800-4-**DEWALT**

www. **DEWALT.com**

Copyright ©2019 DEWALT. The following are trademarks for one or more DEWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.