


DEWALT®


ANCHORS & FASTENERS

DUST X+™

ANCHOR INSTALLATION SYSTEM

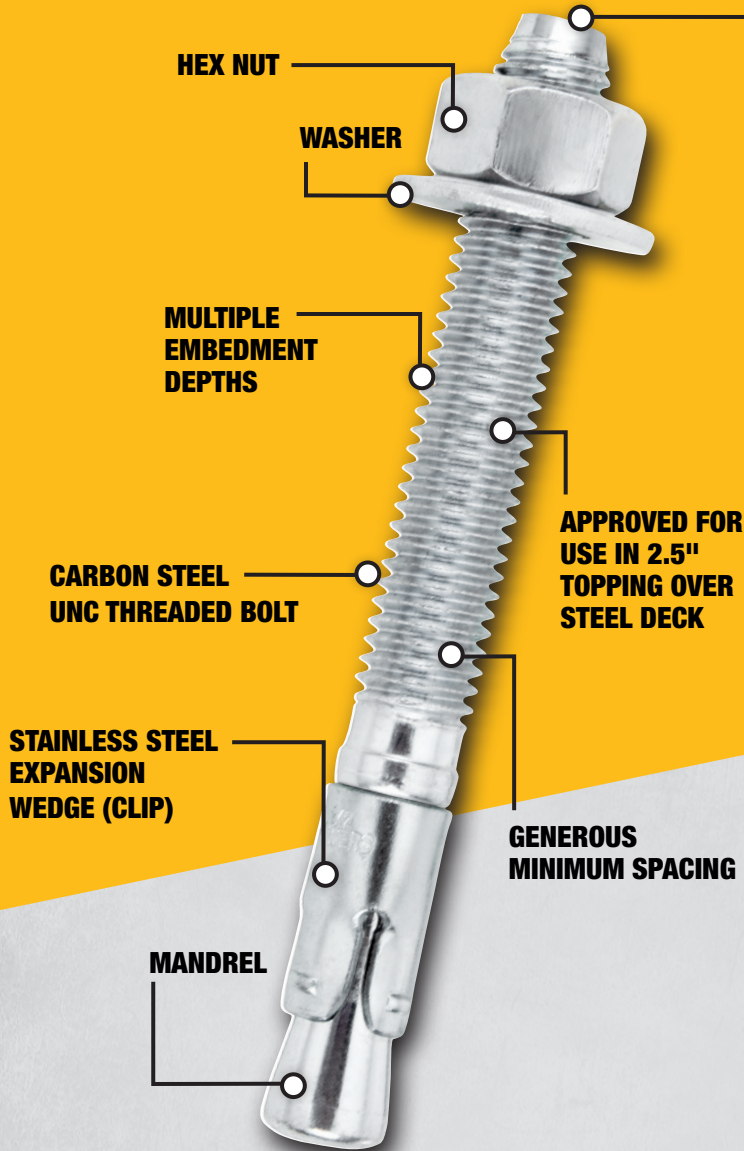

TOP VIEW

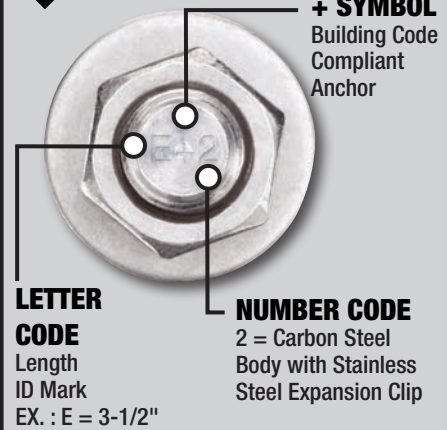

TYPICAL APPLICATIONS

- Structural connections, like beam and column anchorage
- Utility and safety-related attachments
- Protective barriers and racking
- Interior applications / low level corrosion environment
- Tension zone applications, like cable trays and strut, pipe supports, fire sprinkler
- Seismic and wind loading
- Medium to heavy duty purposes

APPROVALS



ESR-2502
Concrete*

*2" effective
embedment for
3/8" & 1/2"
dia. anchors



2015, 2012,
2009

LABC,
LARC, FBC



Recognition in cracked
and uncracked concrete including
seismic and wind loading
(Category 1 Anchors)



Full FM & UL
listings: [www.
DEWALT.com](http://www.DEWALT.com)

BASE MATERIALS



Normal
Weight
Concrete



Lightweight
Concrete



Concrete
Over Steel
Deck



Grouted
Masonry

HIGH PERFORMANCE WEDGE EXPANSION ANCHOR

Power-Stud®+ SD2

POWER-STUD®+ SD2

CAT #	ANCHOR SIZE	THREAD LEN	CTN	MSTR
7413SD2	3/8" x 3"	1-5/8"	50	300
7414SD2	3/8" x 3-1/2"	2-1/4"	50	300
7415SD2	3/8" x 3-3/4"	2-1/2"	50	300
7416SD2	3/8" x 5"	3-3/4"	50	300
7422SD2	1/2" x 3-3/4"	2-1/8"	50	200
7423SD2	1/2" x 4-1/2"	2-7/8"	50	200
7424SD2	1/2" x 5-1/2"	3-7/8"	50	150
7426SD2	1/2" x 7"	5-3/8"	25	100
7427SD2	1/2" x 8-1/2"	6-7/8"	25	100
7435SD2	5/8" x 4-3/4"	2-7/8"	25	100
7433SD2	5/8" x 5"	3-1/8"	25	100
7434SD2	5/8" x 6"	4-1/8"	25	75
7436SD2	5/8" x 7"	5-1/8"	25	75
7438SD2	5/8" x 8-1/2"	6-5/8"	25	75
7442SD2	3/4" x 5-1/2"	3-1/4"	20	60
7444SD2	3/4" x 6-1/4"	4"	20	60
7446SD2	3/4" x 7"	4-3/4"	20	60
7448SD2	3/4" x 8-1/2"	6-1/4"	10	40

Packaged with nuts and washers.




➤ Superior performance for cracked concrete designs



UPGRADE FROM TRADITIONAL HOLE CLEANING



STRUCTURAL DESIGN SOFTWARE FOR ANCHORING TO CONCRETE



Download DDA™ and experience our free concrete anchoring design software.

DEWALT.COM/DDA

RELATED PRODUCTS



DCH293R2DH
20V MAX* XR® SDS PLUS ROTARY HAMMER W/DUST COLLECTION



DCH273P2DHO
20V MAX* XR® SDS PLUS ROTARY HAMMER W/ON-BOARD DUST EXTRACTOR



DWH050K
LARGE HAMMER DUST EXTRACTION - HOLE CLEANING



DWV012
10-GALLON HEPA/RRP WET/DRY DUST EXTRACTOR



HOLLOW DRILL BIT
SDS PLUS AND SDS MAX CARBIDE

For 20V MAX Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

1-800-4-DEWALT

www.DEWALT.com

Copyright ©2021 DeWALT. The following are trademarks for one or more DeWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

ICDWS2SS