


# DEWALT®


## ANCHORS & FASTENERS

# DUST X+™

ANCHOR INSTALLATION SYSTEM

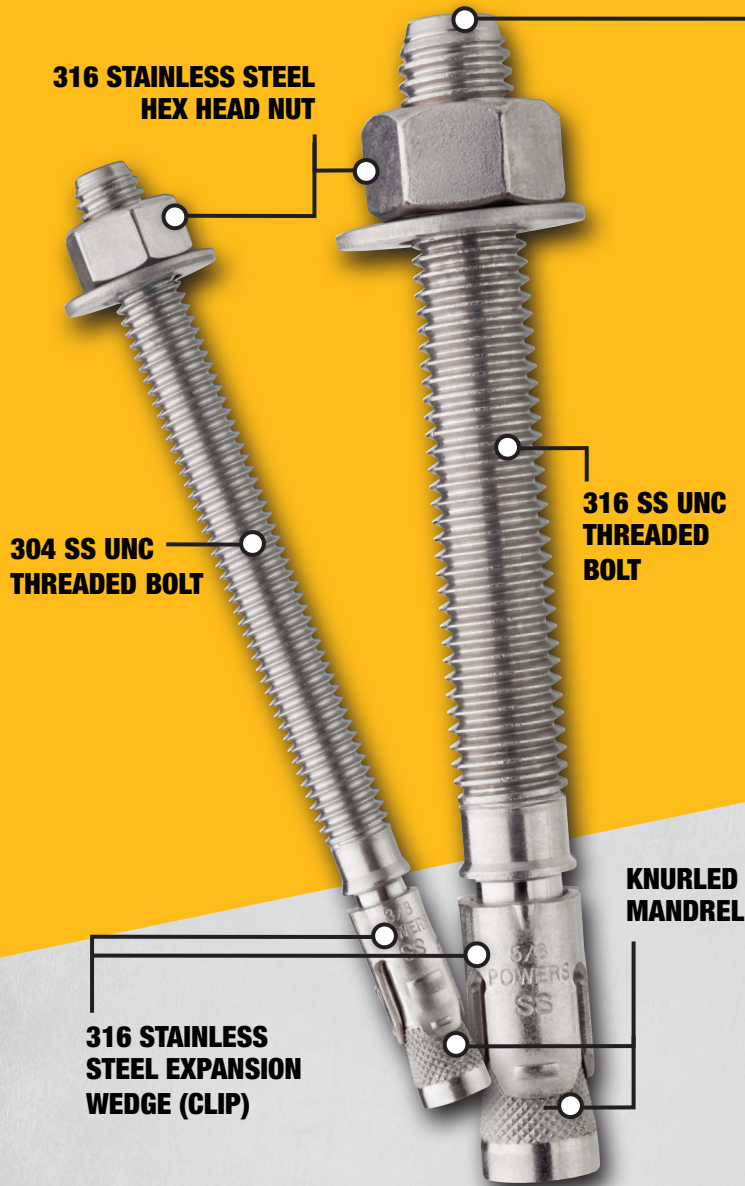

### TOP VIEW

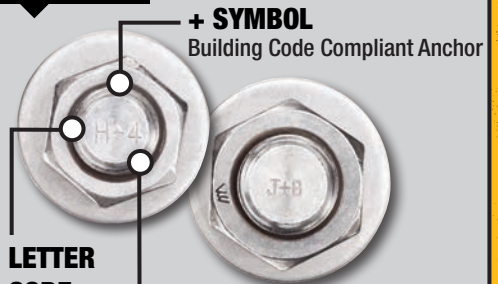

### LETTER CODE

Length  
ID Mark  
EX : H = 5";  
J = 6"

### NUMBER CODE

4 = Type 304 Stainless Steel Body,  
316 Stainless Steel Expansion Clip  
and Hex Nut  
6 = Type 316 Stainless Steel Body,  
Expansion Clip and Hex Nut

### TYPICAL APPLICATIONS

- Knurled mandrel - consistent performance in cracked concrete
- Interior and exterior applications (SD4)
- Corrosion resistant stainless steel (SD6)
- Tension zone applications

### APPROVALS



ESR-2502  
Concrete

IBC  
IRC

2015 2012  
2009



Recognition in cracked  
and uncracked concrete including  
seismic and wind loading  
(Category 1 Anchors)

### BASE MATERIALS



Normal  
Weight  
Concrete



Lightweight  
Concrete



Grouted  
Masonry

## HIGH PERFORMANCE STAINLESS STEEL WEDGE ANCHORS

## Power-Stud®+ SD4/SD6

# POWER-STUD®+ SD4

CAT #	ANCHOR SIZE	THREAD LEN	CTN	MSTR
7300SD4*	1/4" x 1-3/4"	3/4"	100	600
7302SD4	1/4" x 2-1/4"	1-1/4"	100	600
7304SD4	1/4" x 3-1/4"	2-1/4"	100	600
7313SD4	3/8" x 3"	1-5/8"	50	300
7315SD4	3/8" x 3-3/4"	2-3/8"	50	300
7316SD4	3/8" x 5"	3-5/8"	50	300
7322SD4	1/2" x 3-3/4"	2"	50	200
7323SD4	1/2" x 4-1/2"	2-3/4"	50	200
7324SD4	1/2" x 5-1/2"	3-3/4"	50	100
7326SD4	1/2" x 7"	5-1/4"	25	100
7333SD4	5/8" x 5"	3"	25	100
7334SD4	5/8" x 6"	4"	25	75
7338SD4	5/8" x 8-1/2"	6-1/2"	25	50
7342SD4	3/4" x 5-1/2"	3-1/8"	20	60
7348SD4	3/4" x 8-1/2"	6-1/8"	10	40

# POWER-STUD®+ SD6

CAT #	ANCHOR SIZE	THREAD LEN	CTN	MSTR
7600SD6*	1/4" x 1-3/4"	3/4"	100	600
7602SD6	1/4" x 2-1/4"	1-1/4"	100	600
7604SD6	1/4" x 3-1/4"	2-1/4"	100	600
7610SD6*	3/8" x 2-1/4"	7/8"	50	300
7612SD6	3/8" x 2-3/4"	1-3/8"	50	300
7613SD6	3/8" x 3"	1-5/8"	50	300
7614SD6	3/8" x 3-1/2"	2-1/8"	50	300
7615SD6	3/8" x 3-3/4"	2-3/8"	50	300
7616SD6	3/8" x 5"	3-5/8"	50	300
7617SD6	3/8" x 7"	5-5/8"	50	200
7620SD6*	1/2" x 2-3/4"	1"	50	200
7622SD6	1/2" x 3-3/4"	2"	50	200
7623SD6	1/2" x 4-1/2"	2-3/4"	50	200
7624SD6	1/2" x 5-1/2"	3-3/4"	50	100
7626SD6	1/2" x 7"	5-1/4"	25	100
7630SD6*	5/8" x 3-1/2"	1-1/2"	25	100
7632SD6	5/8" x 4-1/2"	2-1/2"	25	100
7633SD6	5/8" x 5"	3"	25	100

# POWER-STUD®+ SD6, CONTINUED

CAT #	ANCHOR SIZE	THREAD LEN	CTN	MSTR
7634SD6	5/8" x 6"	4"	25	75
7636SD6	5/8" x 7"	5"	25	75
7638SD6	5/8" x 8-1/2"	6-1/2"	25	50
7640SD6*	3/4" x 4-1/4"	1-7/8"	20	60
7641SD6*	3/4" x 4-3/4"	2-3/8"	20	60
7642SD6	3/4" x 5-1/2"	3-1/8"	20	60
7644SD6	3/4" x 6-1/4"	3-7/8"	20	60
7646SD6	3/4" x 7"	4-5/8"	20	60
7648SD6	3/4" x 8-1/2"	6-1/8"	10	40

\* Less than the minimum standard anchor length for Strength Design. Published length is the overall length of the anchor. Allow for fixture thickness plus one anchor diameter for the nut and washer thickness when selecting a length. Packaged with nuts and washers. Manual hand pump available (Cat. #08280). Hollow drill bits must be used with a dust extraction vacuum (Cat. #DW012).




## UPGRADE FROM TRADITIONAL HOLE CLEANING



➤ Superior performance in damp or exterior environments



## STRUCTURAL DESIGN SOFTWARE FOR ANCHORING TO CONCRETE

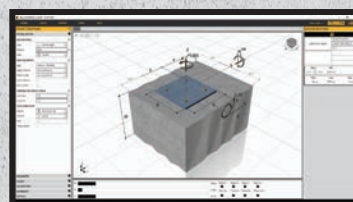

Download DDA™ and experience our free concrete anchoring design software.

[DEWALT.COM/DDA](http://DEWALT.COM/DDA)

## RELATED PRODUCTS



**DCH293R2DH**  
20V MAX\* XR® SDS PLUS  
ROTARY HAMMER W/DUST  
COLLECTION



**DCH273P2DHO**  
20V MAX\* XR® SDS PLUS ROTARY  
HAMMER W/ON-BOARD DUST  
EXTRACTOR



**DWH050K**  
LARGE HAMMER DUST  
EXTRACTION - HOLE CLEANING



**DWV012**  
10-GALLON HEPA/RRP  
WET/DRY DUST EXTRACTOR



**HOLLOW DRILL BIT**  
SDS PLUS AND  
SDS MAX CARBIDE

\*For 20V MAX\* Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

**1-800-4-DEWALT**

**www.DEWALT.com**

Copyright ©2021 DEWALT. The following are trademarks for one or more DEWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

ICDWS4SD6SS