

PURE110+® VS. HILTI® RE 500 V3


Product Comparison

Product Name	Pure110+	HIT-RE 500 V3
Company	DeWALT	Hilti*
Description	Adhesive Anchoring System	Adhesive Anchoring System
Size Range (inch)	3/8, 1/2, 5/8, 3/4, 7/8, 1, 1-1/4 #3, #4, #5, #6, #7, #8, #9, #10	3/8, 1/2, 5/8, 3/4, 7/8, 1, 1-1/4 #3, #4, #5, #6, #7, #8, #9, #10
ICC-ES ESR (concrete)	ESR-3298	ESR-3814
Revision Date	2017 July	2017 Jan
Cracked Concrete	Yes	Yes
Seismic Approval in Concrete	Yes	Yes
Post-Installed Rebar Design	Yes	Yes
LEED	Yes	Yes
VOC	Yes	Yes
NSF 61 (potable drinking water)	Yes	Yes

* Hilti is a registered trademark of Hilti Corporation

Factored Tension Loads Cracked Concrete

2500 psi, Rod ASTM A193 Grade B7
Dry concrete, sustained loading and periodic special inspection

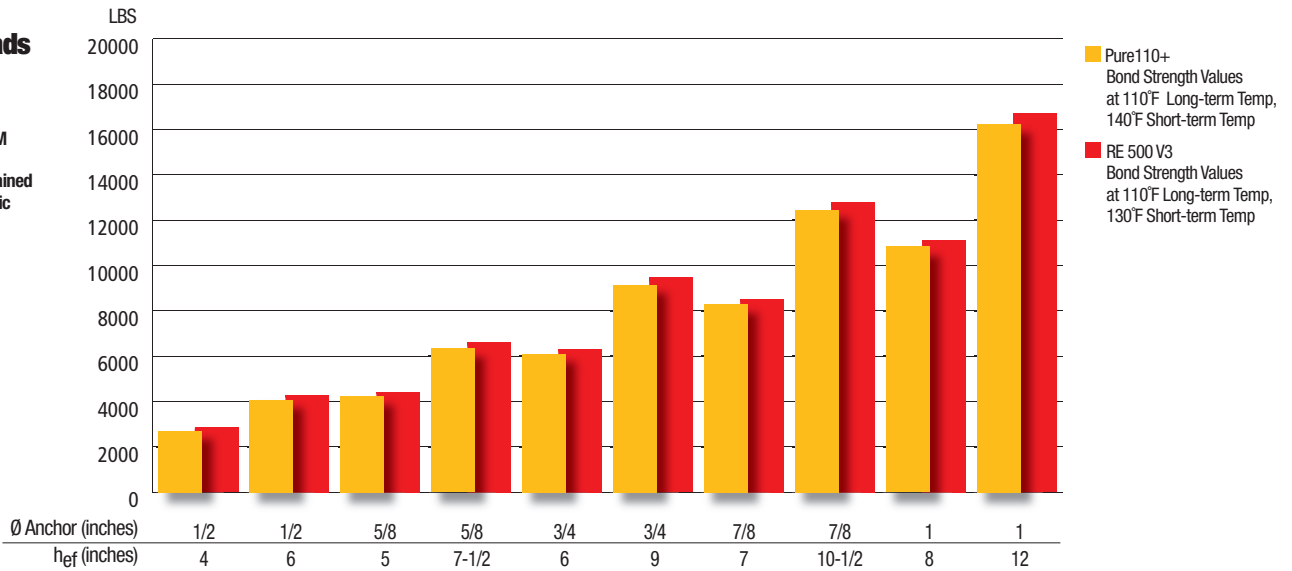

Factored Shear Loads Cracked Concrete

2500 psi NWC, Rod ASTM A193 Grade B7
Dry concrete, sustained loading and periodic special inspection

