


DEWALT®

ANCHORS & FASTENERS

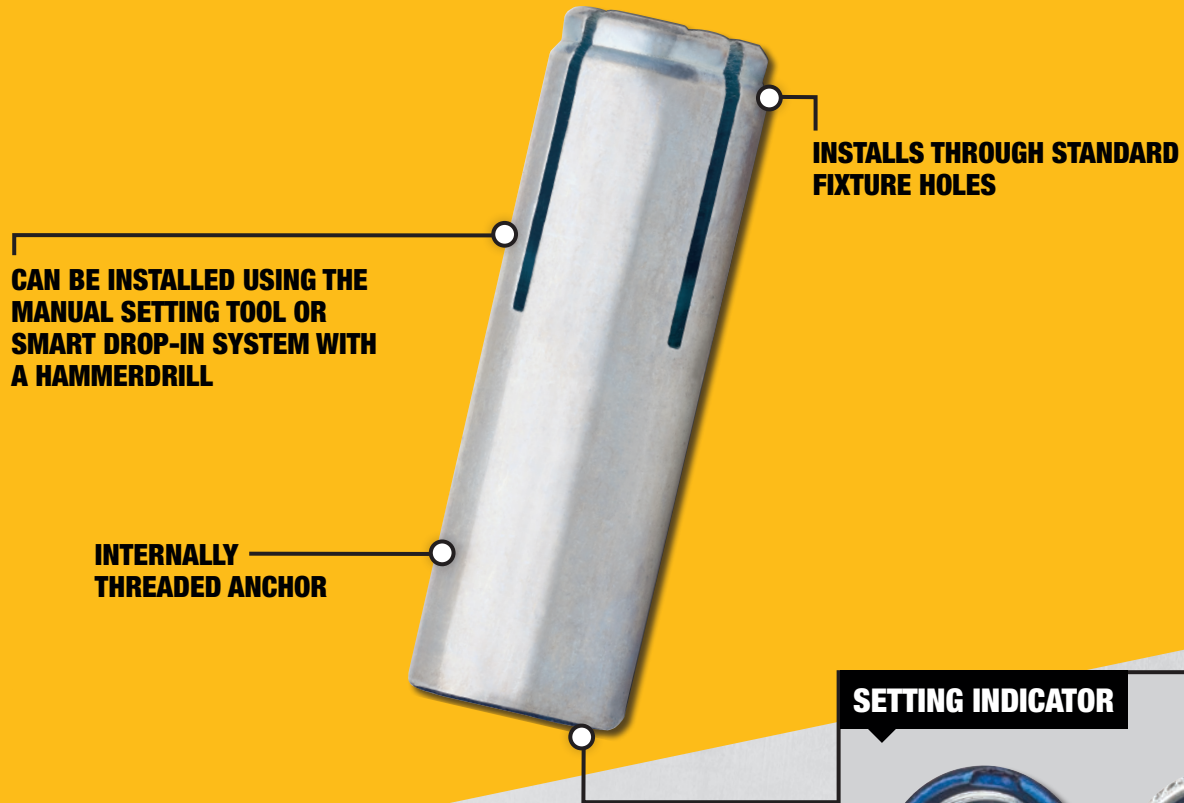

CAN BE INSTALLED USING THE
MANUAL SETTING TOOL OR
SMART DROP-IN SYSTEM WITH
A HAMMERDRILL

INSTALLS THROUGH STANDARD
FIXTURE HOLES

INTERNALLY
THREADED ANCHOR

SETTING INDICATOR



Before Setting



Properly Set

UNIQUE CROWN DESIGN CONFIRMS
ANCHOR HAS BEEN PROPERLY SET WITH
THE SETTING SYSTEM

APPROVALS



Full FM & UL listings:
www.DEWALT.com

BASE MATERIALS



Normal
Weight
Concrete

TYPICAL APPLICATIONS

- › Suspending conduit
- › Fire sprinkler
- › Cable trays and strut
- › Concrete formwork
- › Pipe supports
- › Suspended lighting

**INTERNALLY THREADED
EXPANSION ANCHOR**

Smart DI™ System

SMART DROP-IN

CAT #	ANCHOR SIZE	CTN	MSTR
6304SD	1/4"	100	1000
6306SD	3/8"	50	500
6308SD	1/2"	50	300

DROP-IN TOOL

CAT #	SIZE	CTN	MSTR
00425SD	1/4"	1	6
00427SD	3/8"	1	6
00429SD	1/2"	1	6

DRILL

CAT #	SIZE	CTN	MSTR
00391SD	3/8" (for 1/4" Smart DI)	1	12
00397SD	1/2" (for 3/8" Smart DI)	1	12
00410SD	5/8" (for 1/2" Smart DI)	1	12

REPLACEMENT PARTS

CAT #	FITS TOOL	KIT CONTENTS
00426SD	00425SD	Rubber Spring Plug, 2 Guide Screws
00428SD	00427SD	Rubber Spring Plug, 2 Guide Screws
00430SD	00430SD	Rubber Spring Plug, 2 Guide Screws



RELATED PRODUCTS



DCH293R2DH
20V MAX* XR® SDS PLUS
ROTARY HAMMER W/DUST
COLLECTION



DCH273P2DH0
20V MAX* XR® SDS PLUS ROTARY
HAMMER W/ON-BOARD DUST
EXTRACTOR



HOLLOW DRILL BIT
SDS PLUS AND
SDS MAX CARBIDE



DWV012
10-GALLON HEPA/RRP
WET/DRY DUST EXTRACTOR

For 20V MAX Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

1-800-4-DEWALT

www.DEWALT.com

Copyright ©2021 DEWALT. The following are trademarks for one or more DEWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

ICDWSMRTDISS