

# DOW SILICONES TEST REPORT

## SCOPE OF WORK

CDPH 01350 Standard Method Version 1.2 on Dowsil™ 983 Structural Glazing Sealant

## REPORT NUMBER

106147865GRR-001f

## ISSUE DATE

11-November-2025

## PAGES

12

## DOCUMENT CONTROL NUMBER

Per GRVOC-RT-050b (03-June-2024)

© 2025 INTERTEK



**TEST REPORT FOR DOW SILICONES CORPORATION**

Report No.: 106147865GRR-001f  
Date: 11-November-2025  
P.O.: 4517233403

Telephone: +1 616 656 7401  
www.intertek.com

**SECTION 1**

**CLIENT INFORMATION**

Attention: Austin Hlinka  
Dow Silicones Corporation  
2200 W Salzburg Road  
Auburn, MI 48686 USA  
Phone: +1 989-496-5819  
Email: ahlinka@dow.com



**Logan Albertson**  
**Project Engineer**



**Kyle Tanis**  
**Project Reviewer**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. Unless called out differently in the test method/standard, a simple acceptance decision rule will apply to all statements of conformities in this report.

**SECTION 2**

**SUMMARY AND CONCLUSION**

Test Method: Standard Method Version 1.2 for CDPH 01350  
 Modeling Scenario: Private office (PO) and school classroom (SC)

**CLIENT PROVIDED SAMPLE INFORMATION**

Manufacturer / Location: Dow Silicones / Elizabethtown, KY  
 Product Name: Dowsil™ 983 Structural Glazing Sealant  
 Product Number: Not Specified  
 Product Description: Two-part sealant – Weather sealing  
 Date of Manufacture: Base: 03-April-2025; Catalyst: 16-September-2025  
 Date of Collection: Base: 03-April-2025; Catalyst: 16-September-2025  
 Date of Shipment: Base: 15-April-2025; Catalyst: 12-October-2025

**DESCRIPTION OF SAMPLES**

Date Received by Lab: Base: 17-April-2025; Catalyst: 14-October-2025  
 As Received Sample Condition: Good Condition  
 Lab Sample ID: Base: GRR250417000A-1; Catalyst: GRR2510140005-1  
 Material Submitted: Two (2) cartridges of base and catalyst

**WORK REQUESTED/APPLICABLE DOCUMENTS**

VOC Emissions Analysis: CDPH Standard Method v1.2  
 Intertek Quote: Qu-01510470

**TEST RESULTS**

**CDPH Standard Method v1.2, Table 4.1**

| MODELING SCENARIO     | RESULT (PASS/FAIL) |
|-----------------------|--------------------|
| Private Office (PO)   | PASS               |
| School Classroom (SC) | PASS               |

**LEED v4 Total Volatile Organic Compounds (TVOC)**

| MODELING SCENARIO     | TVOC (mg m <sup>-3</sup> ) |
|-----------------------|----------------------------|
| Private Office (PO)   | < 0.1                      |
| School Classroom (SC) | < 0.1                      |

**SAMPLE DISPOSITION**

At the completion of testing, samples were disposed of in a routine manner.

**SECTION 3**

**CDPH STANDARD METHOD V1.2**

Date Received: Base: 17-April-2025; Catalyst: 14-October-2025  
 Dates Tested: 16-October-2025 to 03-November-2025

**ACCEPTANCE CRITERIA:**

Referencing: CDPH Standard Method v1.2, Table 4.1  
 LEED v4 - Low Emitting Materials  
 LEED v4 - TVOC Ranges:  $\leq 0.5 \text{ mg m}^{-3}$   
 $0.5 \text{ to } 5.0 \text{ mg m}^{-3}$   
 $\geq 5.0 \text{ mg m}^{-3}$

**TEST NOTES OR DEVIATIONS:**

The time between date manufactured and the start of testing for the Dowsil™ 983 Base exceeded 4 months.

**TEST SUMMARY:**

The emissions testing was performed according to “Standard Method for the Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers Version 1.2”. A photograph of the tested sample is included herein. The sample was prepared by mixing catalyst into the base at a 10:1 (base : catalyst) weight ratio then applied in a 3/8” wide aluminum channel and placed into the test chamber with the top surface exposed. The sample was conditioned inside of the test chamber at  $23 \pm 2^\circ\text{C}$  and  $50 \pm 10\% \text{ RH}$ . Air samples were collected prior to the sample being placed in the test chamber (0 hours) and at 264, 288, and 336 hours after preparation. Samples analyzed for individual VOCs and TVOC were collected on multi-sorbent tubes containing glass wool, Tenax TA 35/60 and Carbograph 5 TD 40/60. These VOC samples were analyzed by thermal desorption-gas chromatography/mass-spectrometry, TD-GC/MS. TVOC was calculated through integration of the chromatogram from n-pentane through n-heptadecane using toluene as a surrogate. Individual VOCs were calculated using calibration curves based on pure standards unless otherwise noted. Samples analyzed for low molecular weight aldehydes were collected on cartridges treated with 2,4-dinitrophenylhydrazine (DNPH). Low molecular weight aldehydes were analyzed using high performance liquid chromatography, HPLC.

**Table 1: Conditioning and test timing**

| EXPERIMENT PHASE | START DATE      | DURATION |
|------------------|-----------------|----------|
| Conditioning     | 16-October-2025 | 10 Days  |
| Chamber Testing  | 26-October-2025 | 4 Days   |

**RESULTS:**

**Table 2: Sample and Chamber Conditions during Test Period**

| PARAMETER                   |           | SYMBOL                 | VALUE            | UNITS                          |
|-----------------------------|-----------|------------------------|------------------|--------------------------------|
| Sample Dimensions           | Length    | -                      | 0.154            | m                              |
|                             | Width     | -                      | 0.010            | m                              |
|                             | Thickness | -                      | 0.011            | m                              |
| Wet Sample Mass             |           | -                      | 20.3             | g                              |
| Exposed Sample Surface Area |           | <i>A</i>               | 0.001            | m <sup>2</sup>                 |
| Chamber Volume              |           | <i>V</i>               | 0.116            | m <sup>3</sup>                 |
| Chamber Loading Factor      |           | <i>L</i>               | 0.01             | m <sup>2</sup> m <sup>-3</sup> |
| Inlet Air Flow Rate         |           | <i>Q</i>               | 0.116            | m <sup>3</sup> h <sup>-1</sup> |
| Air Change Rate             |           | <i>N<sub>ACH</sub></i> | 1.00             | h <sup>-1</sup>                |
| Length Specific Flow Rate   |           | <i>q<sub>A</sub></i>   | 0.75             | m <sup>2</sup> h <sup>-1</sup> |
| Chamber Pressure (Range)    |           | <i>P</i>               | 15.9 (13.9-19.1) | Pa                             |
| Average Temperature (Range) |           | <i>T</i>               | 22.4 (21.9-22.7) | °C                             |
| Average Humidity (Range)    |           | RH                     | 50.0 (46.2-53.2) | % RH                           |
| Testing Duration            |           | <i>t</i>               | 336              | h                              |

**Table 3: Test chamber background VOC concentrations in µg m<sup>-3</sup>.**

| COMPOUND     | CAS No. | <i>C<sub>io</sub></i> |
|--------------|---------|-----------------------|
| Formaldehyde | 50-00-0 | 1.4                   |
| TVOC         | -       | < 20.0                |

**Table 4: Test chamber TVOC and formaldehyde concentrations in µg m<sup>-3</sup>.**

| COMPOUND     | CAS No. | 264 H | 288 H | 336 H |
|--------------|---------|-------|-------|-------|
| Formaldehyde | 50-00-0 | 1.4   | 1.4   | 1.0   |
| TVOC         | -       | 96.5  | 88.5  | 78.8  |

**Table 5: Test chamber TVOC and formaldehyde emission factors in µg m<sup>-1</sup> h<sup>-1</sup>.**

| COMPOUND     | CAS No. | 264 H | 288 H | 336 H |
|--------------|---------|-------|-------|-------|
| Formaldehyde | 50-00-0 | < 0.2 | < 0.2 | < 0.2 |
| TVOC         | -       | 69.9  | 63.9  | 56.7  |

Individual emitted VOCs identified above the lower limits of quantitation are listed in Table 6; VOCs which are listed on chemical of concern lists or have CRELs are indicated.

The measured chamber concentrations and corresponding emission factors of identified individual VOCs and TVOCs are listed in Table 7.

In Tables 5, 7 and 8, emission factors were calculated using equation 3.1 in CDPH Standard Method V1.2:

$$EF_{Ai} = \frac{Q \times (C_{it} - C_{i0})}{A_c}$$

The inlet flow rate,  $Q$  ( $m^3 h^{-1}$ ), is the measured flow rate of air into the chamber. The chamber concentration,  $C_{it}$  ( $\mu g m^{-3}$ ), is the concentration of a target VOC<sub>i</sub>, formaldehyde and other carbonyl compounds measured at time  $t$ . The chamber background concentration,  $C_{i0}$  ( $\mu g m^{-3}$ ), is the corresponding concentration measured with the chamber operating without a test specimen. The exposed surface length of the test specimen in the chamber,  $A_c$  (m), is determined from the measurements made at the time of specimen preparation.

**Table 6: VOCs detected above lower limits of quantitation in air samples at 336 hours.**

| VOC                                  | CAS No.  | SURROGATE <sup>1</sup> | CREL <sup>2</sup><br>( $\mu g m^{-3}$ ) | CARB TAC <sup>3</sup> | PROP 65 LIST <sup>4</sup> |
|--------------------------------------|----------|------------------------|---|-----------------------|---------------------------|
| Ethanol                              | 64-17-5  | Yes                    | No                                      | No                    | No                        |
| Cyclotrisiloxane, hexamethyl-        | 541-05-9 | Yes                    | No                                      | No                    | No                        |
| Cyclotetrasiloxane, octamethyl-      | 556-67-2 | Yes                    | No                                      | No                    | No                        |
| Cyclopentasiloxane, decamethyl-      | 541-02-6 | Yes                    | No                                      | No                    | No                        |
| Cyclohexasiloxane, dodecamethyl-     | 540-97-6 | Yes                    | No                                      | No                    | No                        |
| Cycloheptasiloxane, tetradecamethyl- | 107-50-6 | Yes                    | No                                      | No                    | No                        |

<sup>1</sup>Indicates which non-listed VOCs were quantified using surrogate compounds, all other compounds were quantified using pure compounds.

<sup>2</sup>Chronic Reference Exposure Level (CREL) as defined by California Office of Environmental Health Hazard Assessment.

<sup>3</sup>Substance is listed on California Air Resource Board’s (CARB) Toxic Air Contaminant (TAC) identification list.

<sup>4</sup>Substance known to the state of California to cause cancer or reproductive toxicity according to California’s Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65).

**Table 7: Measured chamber concentrations and corresponding emission factors of individual VOCs listed in Table 4-1 of CDPH 01350 V1.2. at 336 hours.**

| VOC                           | CAS No.                           | CHAMBER CONCENTRATION ( $\mu\text{g m}^{-3}$ ) | EMISSION FACTOR ( $\mu\text{g m}^{-1} \text{h}^{-1}$ ) |
|-------------------------------|-----------------------------------|--|--|
| Formaldehyde                  | 50-00-0                           | 1.0  | < 0.2  |
| Acetaldehyde                  | 75-07-0                           | < 3.7  | < 2.7  |
| Vinyl acetate                 | 108-05-4                          | < 0.8  | < 0.6  |
| Epichlorohydrin               | 106-89-8                          | < 1.8  | < 1.4  |
| Ethanol, 2-methoxy-, acetate  | 110-49-6                          | < 1.2  | < 0.9  |
| Isopropyl Alcohol             | 67-63-0                           | < 0.6  | < 0.4  |
| Ethene, 1,1-dichloro-         | 75-35-4                           | < 0.6  | < 0.4  |
| Methylene chloride            | 75-09-2                           | < 0.7  | < 0.6  |
| Carbon disulfide              | 75-15-0                           | < 0.6  | < 0.4  |
| Methyl tert-butyl ether       | 1634-04-4                         | < 2.5  | < 1.9  |
| n-Hexane                      | 110-54-3                          | < 0.5  | < 0.4  |
| Trichloromethane (Chloroform) | 67-66-3                           | < 0.3  | < 0.2  |
| Ethanol, 2-methoxy-           | 109-86-4                          | < 1.5  | < 1.1  |
| Ethane, 1,1,1-trichloro-      | 71-55-6                           | < 0.4  | < 0.3  |
| Benzene                       | 71-43-2                           | < 0.4  | < 0.3  |
| Carbon Tetrachloride          | 56-23-5                           | < 0.1  | < 0.1  |
| 2-Propanol, 1-methoxy-        | 107-98-2                          | < 1.1  | < 0.8  |
| Ethylene glycol               | 107-21-1                          | < 9  | < 7  |
| Trichloroethylene             | 79-01-6                           | < 0.6  | < 0.5  |
| 1,4-Dioxane                   | 123-91-1                          | < 0.6  | < 0.5  |
| Ethanol, 2-ethoxy-            | 110-80-5                          | < 2.0  | < 1.5  |
| Toluene                       | 108-88-3                          | < 0.8  | < 0.6  |
| Formamide, N,N-dimethyl-      | 68-12-2                           | < 1.9  | < 1.4  |
| Tetrachloroethylene           | 127-18-4                          | < 0.4  | < 0.3  |
| Benzene, chloro-              | 108-90-7                          | < 0.4  | < 0.3  |
| Ethylbenzene                  | 100-41-4                          | < 0.2  | < 0.2  |
| Xylene (-m, -p, & -o)         | 108-38-3,<br>95-47-6,<br>106-42-3 | < 1.1  | < 0.8  |
| Styrene                       | 100-42-5                          | < 0.5  | < 0.4  |
| 2-Ethoxyethyl acetate         | 111-15-9                          | < 0.4  | < 0.3  |
| Phenol                        | 108-95-2                          | < 0.8  | < 0.6  |
| Benzene, 1,4-dichloro-        | 106-46-7                          | < 0.1  | < 0.1  |
| Isophorone                    | 78-59-1                           | < 0.3  | < 0.3  |
| Naphthalene                   | 91-20-3                           | < 0.2  | < 0.1  |

**Table 8: Measured chamber concentrations and corresponding emission factors of identified non-listed individual VOCs and TVOC at 336 hours.**

| VOC                                  | CAS No.  | CHAMBER CONCENTRATION ( $\mu\text{g m}^{-3}$ ) | EMISSION FACTOR ( $\mu\text{g m}^{-1} \text{h}^{-1}$ ) |
|--------------------------------------|----------|--|--|
| Ethanol                              | 64-17-5  | 2.6  | 1.9  |
| Cyclotrisiloxane, hexamethyl-        | 541-05-9 | 6.6  | 4.9  |
| Cyclotetrasiloxane, octamethyl-      | 556-67-2 | 21.1   | 15.9   |
| Cyclopentasiloxane, decamethyl-      | 541-02-6 | 17.3   | 13.0   |
| Cyclohexasiloxane, dodecamethyl-     | 540-97-6 | 20.6   | 15.4   |
| Cycloheptasiloxane, tetradecamethyl- | 107-50-6 | 2.3  | 1.7  |
| TVOC                                 | -        | 78.8   | 56.7   |

**Exposure Scenario Modeling and Evaluation:**

Estimated building concentrations for the listed scenarios were calculated using equation 3.2a of CDPH Standard Method V1.2:

$$C_{Bi} = \frac{EF_{Ai} \times A_B}{Q_B}$$

The area specific emission rate  $EF_A$  at 336 hours (14 days) total exposure time is multiplied by the ratio of the exposed length of the installed material in the building,  $A_B$  (m), to the flow rate of outside ventilation air,  $Q_B$  ( $\text{m}^3 \text{h}^{-1}$ ).

The modeling parameters used for the given scenarios are listed in Table 9. The modeled concentrations of identified individual VOCs are listed in Tables 10 & 11. Whether the modeled concentrations meet the maximum allowable concentration requirements specified in Table 4.1 of CDPH Standard Method V1.2 are also indicated.

**Table 9: Standard modeling parameters for window and door perimeter.**

| PARAMETER  | SYMBOL | VALUE | UNITS                      |
|--|--------|-------|----------------------------|
| Exposed Surface length Installed in <i>Private Office (PO)</i> | $A_B$  | 10.1  | m                          |
| Air flow rate of <i>Private Office (PO)</i>                    | $Q_B$  | 20.7  | $\text{m}^3 \text{h}^{-1}$ |
| Exposed Surface length Installed in <i>Classroom (SC)</i>      | $A_B$  | 17.4  | m                          |
| Air flow rate of <i>Classroom (SC)</i>                         | $Q_B$  | 191   | $\text{m}^3 \text{h}^{-1}$ |

Table 10: Modeled concentrations of individual VOCs specified in Table 4-1 of CDPH 01350 V1.2.

| VOC                           | CAS NO.                     | MODELED CONCENTRATION ( $\mu\text{g m}^{-3}$ ) |       | CONC. LIMIT ( $\mu\text{g m}^{-3}$ ) | RESULT Pass (P) /Fail (F) |    |
|-------------------------------|-----------------------------|--|-------|--------------------------------------|---------------------------|----|
|                               |                             | PO   | SC    |                                      | PO                        | SC |
| Formaldehyde                  | 50-00-0                     | < 0.1  | < 0.1 | 9                                    | P                         | P  |
| Acetaldehyde                  | 75-07-0                     | < 1.3  | < 0.2 | 70                                   | P                         | P  |
| Vinyl acetate                 | 108-05-4                    | < 0.3  | < 0.1 | 100                                  | P                         | P  |
| Epichlorohydrin               | 106-89-8                    | < 0.7  | < 0.1 | 1.5                                  | P                         | P  |
| Ethanol, 2-methoxy-, acetate  | 110-49-6                    | < 0.4  | < 0.1 | 45                                   | P                         | P  |
| Isopropyl Alcohol             | 67-63-0                     | < 0.2  | < 0.1 | 3,500                                | P                         | P  |
| Ethene, 1,1-dichloro-         | 75-35-4                     | < 0.2  | < 0.1 | 35                                   | P                         | P  |
| Methylene chloride            | 75-09-2                     | < 0.3  | < 0.1 | 200                                  | P                         | P  |
| Carbon disulfide              | 75-15-0                     | < 0.2  | < 0.1 | 400                                  | P                         | P  |
| Methyl tert-butyl ether       | 1634-04-4                   | < 0.9  | < 0.2 | 4,000                                | P                         | P  |
| n-Hexane                      | 110-54-3                    | < 0.2  | < 0.1 | 3,500                                | P                         | P  |
| Trichloromethane (Chloroform) | 67-66-3                     | < 0.1  | < 0.1 | 150                                  | P                         | P  |
| Ethanol, 2-methoxy-           | 109-86-4                    | < 0.5  | < 0.1 | 30                                   | P                         | P  |
| Ethane, 1,1,1-trichloro-      | 71-55-6                     | < 0.1  | < 0.1 | 500                                  | P                         | P  |
| Benzene                       | 71-43-2                     | < 0.1  | < 0.1 | 1.5                                  | P                         | P  |
| Carbon Tetrachloride          | 56-23-5                     | < 0.1  | < 0.1 | 20                                   | P                         | P  |
| 2-Propanol, 1-methoxy-        | 107-98-2                    | < 0.4  | < 0.1 | 3,500                                | P                         | P  |
| Ethylene glycol               | 107-21-1                    | < 3  | < 1   | 200                                  | P                         | P  |
| Trichloroethylene             | 79-01-6                     | < 0.2  | < 0.1 | 300                                  | P                         | P  |
| 1,4-Dioxane                   | 123-91-1                    | < 0.2  | < 0.1 | 1,500                                | P                         | P  |
| Ethanol, 2-ethoxy-            | 110-80-5                    | < 0.7  | < 0.1 | 35                                   | P                         | P  |
| Toluene                       | 108-88-3                    | < 0.3  | < 0.1 | 150                                  | P                         | P  |
| Formamide, N,N-dimethyl-      | 68-12-2                     | < 0.7  | < 0.1 | 40                                   | P                         | P  |
| Tetrachloroethylene           | 127-18-4                    | < 0.2  | < 0.1 | 17.5                                 | P                         | P  |
| Benzene, chloro-              | 108-90-7                    | < 0.1  | < 0.1 | 500                                  | P                         | P  |
| Ethylbenzene                  | 100-41-4                    | < 0.1  | < 0.1 | 1,000                                | P                         | P  |
| Xylene (-m, -p, & -o)         | 108-38-3, 95-47-6, 106-42-3 | < 0.4  | < 0.1 | 350                                  | P                         | P  |
| Styrene                       | 100-42-5                    | < 0.2  | < 0.1 | 450                                  | P                         | P  |
| 2-Ethoxyethyl acetate         | 111-15-9                    | < 0.2  | < 0.1 | 150                                  | P                         | P  |
| Phenol                        | 108-95-2                    | < 0.3  | < 0.1 | 100                                  | P                         | P  |
| Benzene, 1,4-dichloro-        | 106-46-7                    | < 0.1  | < 0.1 | 400                                  | P                         | P  |
| Isophorone                    | 78-59-1                     | < 0.1  | < 0.1 | 1,000                                | P                         | P  |
| Naphthalene                   | 91-20-3                     | < 0.1  | < 0.1 | 4.5                                  | P                         | P  |

Table 11: Modeled concentrations of identified non-listed individual VOCs.

| VOC                                  | CAS NO.  | MODELED CONCENTRATION<br>( $\mu\text{g m}^{-3}$ ) |      |
|--------------------------------------|----------|---|------|
|                                      |          | PO  | SC   |
| Ethanol                              | 64-17-5  | 2.6   | 1.9  |
| Cyclotrisiloxane, hexamethyl-        | 541-05-9 | 6.6   | 4.9  |
| Cyclotetrasiloxane, octamethyl-      | 556-67-2 | 21.1  | 15.9 |
| Cyclopentasiloxane, decamethyl-      | 541-02-6 | 17.3  | 13.0 |
| Cyclohexasiloxane, dodecamethyl-     | 540-97-6 | 20.6  | 15.4 |
| Cycloheptasiloxane, tetradecamethyl- | 107-50-6 | 2.3   | 1.7  |
| TVOC <sub>Toluene</sub>              | -        | 78.8  | 56.7 |

**PHOTOGRAPHS:**

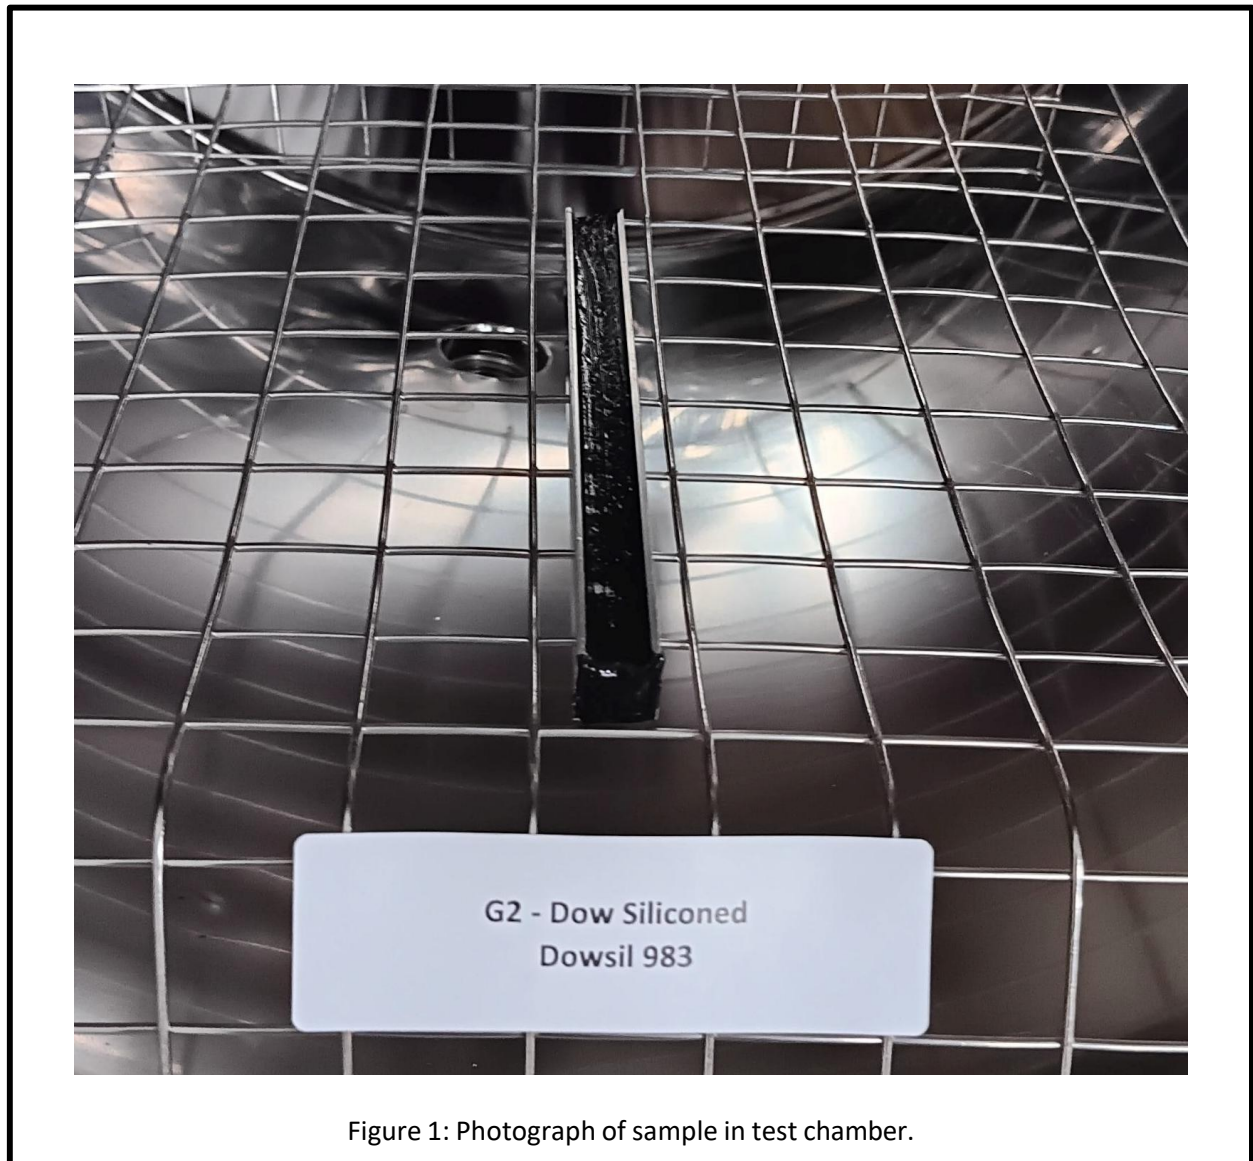




Figure 1: Photograph of sample in test chamber.

**SECTION 4**

**CLIENT PROVIDED CHAIN OF CUSTODY**

|    | <b>Ship To:</b><br>Attn: VOC Laboratory<br>4700 Broadmoor Ave SE<br>Suite 200<br>Kentwood, MI 49512<br>Phone: 616-656-7401  | <b>Chain of Custody for Chemical Testing</b><br>Intertek Quotation Number:<br>Purchase Order (enter Company and Number):<br>Dow - 4517233403                |           |               |            |       |          |                  |               |                      |           |     |              |                 |                        |         |          |
|---|---|---|-----------|---------------|------------|-------|----------|------------------|---------------|----------------------|-----------|-----|--------------|-----------------|------------------------|---------|----------|
|   | <b>Customer Information</b><br>Company: Dow Silicones Corp.<br>Street Address: 2200 W Salzburg Rd.<br>City/State/Postal code: Auburn, MI 48611<br>Country: United States<br>Contact Name & Title (for reporting): Austin Hlinka - Senior R&D/TS&D Technician<br>Contact Phone/Fax Numbers: (989) 324-1716<br>Contact E-mail Address: Ahlinka@dow.com<br>Financially Responsible Co.: Dow  | <b>Shipping Details</b><br>Packed & Shipped By:<br>Shipping Date: 4/15/2025<br>Carrier/Airbill Number:  |           |               |            |       |          |                  |               |                      |           |     |              |                 |                        |         |          |
| <b>Manufacturer Information (If Different)</b><br>Company:<br>City/State/Country:<br>Contact Name/Title:<br>Phone Number/E-mail Address:  | <b>Requested Testing</b><br>Test to be performed: CDPH VOC Testing  | <b>Customer Request for Certification</b><br>Clean Air™ Certification: <input type="checkbox"/> YES   |           |               |            |       |          |                  |               |                      |           |     |              |                 |                        |         |          |
| <b>Sample Details</b><br>Product Commercial Name: Dowsil™ 983 Structural Glazing Sealant Base<br>Product Commercial Part No.(if not part of the name)*:<br>Not a part<br>Manufacturer Sample Tracking ID:<br>Date Manufactured*: 4/3/2025<br>Product Category & Use*: Sealant - weatherseal and structural applications<br>Sample Construction Materials*:<br>Glass, Aluminum, Alodine, Kynar<br>Plant Name & Location*: Dow - Elizabethtown KY<br>Collection Location within Plant:<br>Date & Time Collected*: 4/3/2025<br>Number of Sample Pieces*: 2 Cartridges<br>Sample Collected by*: Austin Hlinka<br>Phone/Fax Numbers*: (989) 324-1716<br>E-mail Address*: Ahlinka@dow.com | <b>Special Customer Instructions</b>  | <b>Customer Authorizes Laboratory to Submit Copies of Test Reports To:</b><br>Contact: Austin Hlinka<br>Email Address: Ahlinka@dow.com<br>Organization: Dow |           |               |            |       |          |                  |               |                      |           |     |              |                 |                        |         |          |
| <b>Intertek Use Only</b><br>Condition of Shipping Package: Good Condition<br>Condition of Sample: Good Condition<br>Sample ID: GRR250417000A-1<br>GIN: G106147865<br>*Indicates required field  | <b>Sample Handling*</b> <table border="1"> <thead> <tr> <th></th> <th>Printed Name*</th> <th>Signature*</th> <th>Date*</th> <th>Company*</th> </tr> </thead> <tbody> <tr> <td>Relinquished By:</td> <td>Austin Hlinka</td> <td><i>Austin Hlinka</i></td> <td>4/21/2025</td> <td>Dow</td> </tr> <tr> <td>Received by:</td> <td>Logan Albertson</td> <td><i>Logan Albertson</i></td> <td>4/22/25</td> <td>Intertek</td> </tr> </tbody> </table> |   |           | Printed Name* | Signature* | Date* | Company* | Relinquished By: | Austin Hlinka | <i>Austin Hlinka</i> | 4/21/2025 | Dow | Received by: | Logan Albertson | <i>Logan Albertson</i> | 4/22/25 | Intertek |
|   | Printed Name*   | Signature*  | Date*     | Company*      |            |       |          |                  |               |                      |           |     |              |                 |                        |         |          |
| Relinquished By:  | Austin Hlinka   | <i>Austin Hlinka</i>  | 4/21/2025 | Dow           |            |       |          |                  |               |                      |           |     |              |                 |                        |         |          |
| Received by:  | Logan Albertson   | <i>Logan Albertson</i>  | 4/22/25   | Intertek      |            |       |          |                  |               |                      |           |     |              |                 |                        |         |          |

CLIENT PROVIDED CHAIN OF CUSTODY

|   |  |  |   |  |  |
|---|--|--|---|--|--|
|    | <b>Ship To:</b><br>Attn: VOC Laboratory<br>4700 Broadmoor Ave SE<br>Suite 200<br>Kentwood, MI 49512<br>Phone: 616-656-7401   |  | <b>Chain of Custody for Chemical Testing</b><br>Intertek Quotation Number:<br>Purchase Order (enter Company and Number):<br>Dow -4517233403 |  |  |
|   | <b>Customer Information</b><br>Company: Dow Silicones Corp.<br>Street Address: 2200 W Salzburg Rd.<br>City/State/Postal code: Auburn, MI 48611<br>Country: United States<br>Contact Name & Title (for reporting): Austin Hlinka - Senior R&D/TS&D Technician<br>Contact Phone/Fax Numbers: (989) 324-1716<br>Contact E-mail Address: Ahlinka@dow.com<br>Financially Responsible Co.: Dow |  | <b>Shipping Details</b><br>Packed & Shipped By:<br>Shipping Date: 10/12/2025<br>Carrier/Airbill Number:                                     |  |  |
| <b>Manufacturer Information (If Different)</b><br>Company:<br>City/State/Country:<br>Contact Name/Title:<br>Phone Number/E-mail Address:  |  | <b>Requested Testing</b><br>Test to be performed: CDPH VOC Testing |   | <b>Customer Request for Certification</b><br>Clean Air™ Certification: <input type="checkbox"/> YES  |  |
| <b>Sample Details</b><br>Product Commercial Name*: Dowsil 983 Silicone Insulating Glass Sealant Catal<br>Product Commercial Part No.(if not part of the name)*:<br>Not a part<br>Manufacturer Sample Tracking ID:<br>Date Manufactured*: 9/16/2025<br>Product Category & Use*: Sealant - weatherseal and structural applications<br>Sample Construction Materials*:<br>IG Units, Glass, Structural & Weatherseal building<br>Plant Name & Location*: Dow - Elizabethtown KY<br>Collection Location within Plant:<br>Date & Time Collected*: 9/16/2025<br>Number of Sample Pieces*: 1 Tin<br>Sample Collected by*: Austin Hlinka<br>Phone/Fax Numbers*: (989) 324-1716<br>E-mail Address*: Ahlinka@dow.com |  | <b>Special Customer Instructions</b>                               |   | <b>Customer Authorizes Laboratory to Submit Copies of Test Reports To:</b><br>Contact: Austin Hlinka<br>Email Address: Ahlinka@dow.com<br>Organization: Dow<br>Contact:<br>Email Address:<br>Organization: |  |
| <b>Intertek Use Only</b><br>Condition of Shipping Package: Good Condition<br>Condition of Sample: Good Condition<br>Sample ID: GRR2510140005-1<br>GIN: G106147865<br>*Indicates required field  |  | <b>Sample Handling*</b>  |   |  |  |
|   | <b>Printed Name*</b>   | <b>Signature*</b>  | <b>Date*</b>  | <b>Company*</b>  |  |
| Relinquished By:  | Austin Hlinka  | <i>Austin Hlinka</i>   | 10/17/2025  | Dow  |  |
| Received by:  | Logan Albertson  | <i>Logan Albertson</i>   | 10/17/25  | Intertek   |  |