



DRYVIT E FINISH OVER STUCCO

A Lightweight and Highly-Flexible Finish with Exceptional Crack-Bridging and Superior Long-Term Performance



 **Dryvit™**



Residence | Tucson, Arizona

LIGHTWEIGHT AND HIGHLY FLEXIBLE, E FINISH OFFERS BETTER LONG-TERM PERFORMANCE

Dryvit™ E™ Finish Over Stucco

The finest home builders have discovered a way to help stucco homes look more beautiful — They use Dryvit's revolutionary E Finish.

E Finish over stucco demonstrates better performance characteristics than standard elastomerics.

The improved flexibility (see data on right) enhances crack-bridging on stucco walls, meaning fewer callbacks and lower bottom-line cost.*

"Since switching to the Dryvit E Finish product, we have fewer stucco-related callbacks for our Warranty Department — we feel Dryvit actually saves us money," said one fine home builder who recently chose E Finish.

Tested in the lab and, more importantly, proven in the real world: Dryvit E Finish is the best high-performance solution for finishing stucco walls.

* While Dryvit E Finishes provide enhanced crack-bridging capability, due to the variety of stresses and structural forces that can exist on any project, Dryvit cannot guarantee that cracks will not occur.

PERFORMANCE PROVEN IN FLEXIBILITY TESTING

The superiority of the Dryvit E Finish has been confirmed in two test procedures (see below) that are universally accepted by the paint and coating industry as effective in determining the flexibility of a finish.

ASTM D522 TEST RESULTS

ASTM D522-93a is a standard approved by the Department of Defense as a test method for the determination of the resistance to cracking (flexibility) of organic finishes on test substrates. In this test, finish materials in question are applied at a uniform thickness to panels of sheet metal. After drying, the finish panels are bent over a mandrel; and resistance to the cracking of the finish is determined. The test can be carried out at any desired temperature and mandrel diameter.


This test method has been used in rating finishes for their ability to resist cracking when elongated. In the test performed at a third-party testing facility, two finishes (E Finish and an elastomeric) were evaluated. The finishes were applied to aluminum Q-panels at normal application thicknesses as per ASTM D522 Method B requirements and allowed to dry for 28 days at 75°F and 50 percent relative humidity prior to testing in a temperature-controlled chamber. The panels remained for 2 hours each at test temperature before running the actual mandrel bend.

TEMPERATURE	68 °F				32 °F				-4 °F			
DIAMETER	4"	2"	1"	.5"	4"	2"	1"	.5"	4"	2"	1"	.5"
E FINISH	Pass	Pass	Pass	Pass	Pass	Fail	Fail	Fail	Pass	Fail	Fail	Fail
ELASTOMERIC	Pass	Pass	Fail	Fail	Pass	Fail	Fail	Fail	Fail	Fail	Fail	Fail

MOVING WALL TEST	Observation
E FINISH	Sample Remained Intact
ELASTOMERIC	Sample Failed <i>(Obvious Cracking)</i>

MOVING WALL TEST RESULTS

In the Moving Wall Test, an elastomeric finish was compared side by side under identical conditions with E Finish. The experiment was conducted over a 61-day period. The elastomeric samples cracked in the test procedure, but the Dryvit E Finish remained intact. The testing clearly demonstrates the better flexibility and crack-bridging capability of the E Finish product.

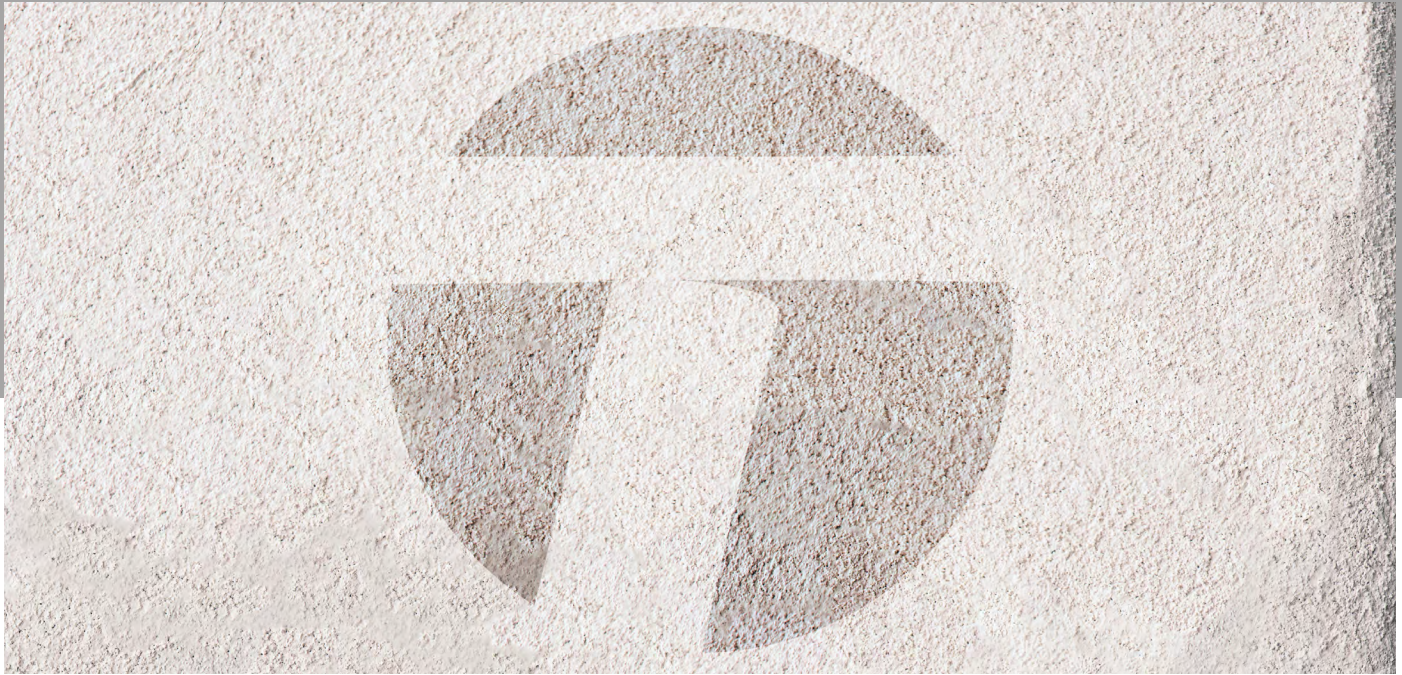

DRYVIT PROVEN PERFORMANCE

Dryvit's commitment to total quality means that the colors you select will be consistent.

Warranty:

All Dryvit products are backed by a strong, written warranty. Consult Dryvit Systems, Inc. or your local Dryvit distributor for further details.

For more information on how Dryvit's E Finish can revolutionize your next project, call us at 1-800-556-7752, or email us at info@dryvit.com.



Is Part of Tremco Construction Products Group

Dryvit Systems, Inc. | One Energy Way | West Warwick, RI, 02893 | 401.822.4100 | dryvit.com

Tremco Construction Products Group (CPG) brings together Tremco Incorporated's Commercial Sealants & Waterproofing and Roofing & Building Maintenance operating divisions; Dryvit Systems, Inc.; Nudura Inc.; Willseal; Weatherproofing Technologies, Inc. and Weatherproofing Technologies Canada, Inc.



Construction Products Group

Dryvit®, AquaFlash®, Backstop®, Outsulation®, Fedderlite®, Metalite®, NewBrick® and Outsulite® are registered trademarks of Dryvit Systems, Inc. Use of the ® symbol indicates registration with the US Patent & Trademark Office and the Canadian Intellectual Property Office.

tremcocpg.com