



## EXPANSION JOINT COMPOUND – TECHNICAL BULLETIN #1018C TWO COMPONENT EPOXY

---

Revised: 05/2018

### PRODUCT DESCRIPTION

ITW PERFORMANCE POLYMERS EXPANSION JOINT COMPOUND is a two component epoxy resin formulation intended as a flexible foundation seam sealant. It is self-leveling, flows smoothly and has good adhesive strength and flexibility over a wide temperature range.

### USE & BENEFITS

ITW PERFORMANCE POLYMERS EXPANSION JOINT COMPOUND is used to seal joints where expansion and contraction movement will take place. For best results, design the joint to be twice as wide as is deep.

A few of the benefits include:

- Excellent adhesion to concrete, masonry, cured epoxy, glass, aluminum, steel, wood and many other construction materials.
- Remains flexible over a wide temperature range, 0°F to 150°F (-18°C to 65°C).
- Durable and weather resistant.
- Vibration and impact resistant.

### SURFACE PREPARATIONS


Store the resin and hardener at between 70°F (21°C) and 80°F (27°C) for 24 hours before use. All surfaces must be sound, clean and dry. Remove all oils, grease, previous caulking, efflorescence and protective coating, etc. New concrete must be completely cured. Application should be made when the joint is as near mid-working temperature range as practicable, but above 55°F (13°C). Mix EXPANSION JOINT COMPOUND by adding the hardener to the resin can and using a small Jiffy mixer blade at 200 rpm in an electric drill. Mix for three minutes. Clean all tools with PRT-59 solvent. A trowelable mixture can be made by adding dry sand to mixed EXPANSION JOINT COMPOUND.

### PHYSICAL PROPERTIES

ELONGATION	200%
SERVICE TEMPERATURE	0°F - 150°F (-18°C to 65°C)

### PRODUCT INFORMATION

COLORS	Red or Gray
MIX RATIO	12 parts resin to 1 part hardener
COVERAGE	152 cu. in. (2.5 liters)
APPLICATION TEMPERATURE	Above 13°C (55°F)
CURE TIME (APPROXIMATE)	24 hours at 75°F (24°C) 48 hours at 55°F (13°C)
POT LIFE	45 minutes
CLEAN UP	IMPAX IXT-59 Solvent
UNIT WEIGHT	Resin: 1 gallon can. Net weight 6 lbs. 8 oz. (2.95 kg) Hardener: 1 pint can. Net weight 8.5 oz. (241 g)

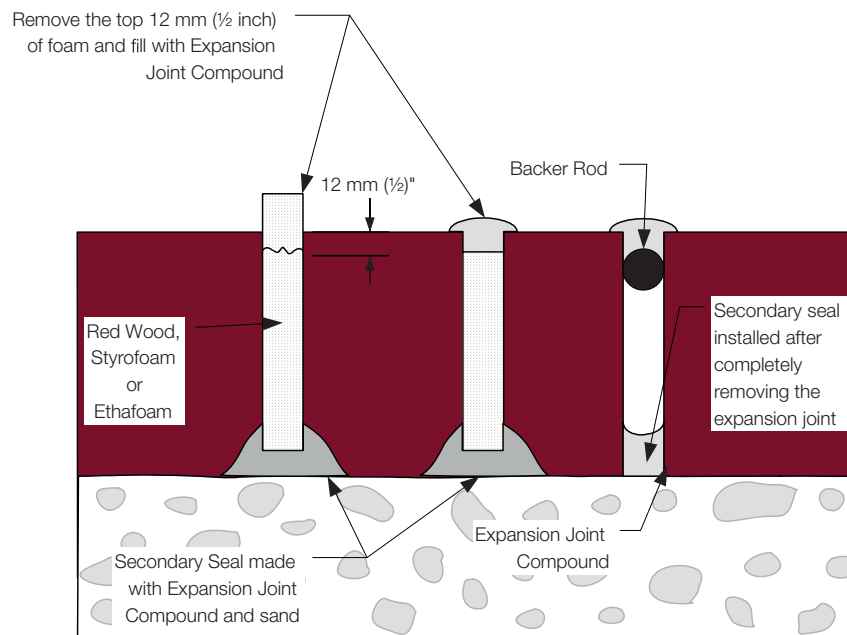

**General:** Every reasonable effort is made to insure the technical information and recommendations on these data pages are true and accurate to the best of our knowledge at the date of issuance. However, this information is subject to change without notice. Prior versions of this publication are invalid with the release of this version. Products and information are intended for use by qualified applicators that have the required background, technical knowledge, and equipment to perform said tasks in a satisfactory manner. Consult your local distributor for product availability, additional product information, and technical support. **Warranty:** ITW Performance Polymers, a division of Illinois Tool Works Inc., warrants that its products meet their printed specifications. This is the sole warranty. This warranty expires one year after product shipment. **Warranty Claims:** If any product fails to meet the above, ITW Performance Polymers will, at its option, either replace the product or refund the purchase price. ITW Performance Polymers will have no other liability for breach of warranty, negligence, or otherwise. All warranty claims must be made in writing within one year of the date of shipment. No other claims will be considered. **Disclaimer:** ITW Performance Polymers makes no other warranty, expressed or implied, and specifically disclaims any warranty of merchantability or fitness for a particular purpose. Suggestions concerning the use of products are not warranties. The purchaser assumes the responsibility for determining suitability of products and appropriate use. ITW Performance Polymers' sole liability, for breach of warranty, negligence or otherwise, shall be the replacement of product or refund of the purchase price, at ITW Performance Polymers' election. Under no circumstances shall ITW Performance Polymers be liable for any indirect, incidental or consequential damages. **Modification of Warranty:** No distributor or sales representative has the authority to change the above provisions. No change in the above provisions will be valid unless in writing and signed by an officer or the Technical Director of ITW Performance Polymers. No term of any purchase order shall serve to modify any provision of this document. **Mediation and Arbitration:** If any dispute arises relating to products or product warranties, either the purchaser or ITW Performance Polymers may a) initiate mediation under the then current Center for Public Resources (CPR) Model Procedure for Mediation of Business Disputes, or b) initiate a non-binding arbitration under the rules of the American Arbitration Association for the resolution of commercial disputes.

### ITW PERFORMANCE POLYMERS

130 Commerce Drive | Montgomeryville | PA 18936 | USA | T: 215-855-8450 | E-mail: customerservice.na@itwpp.com | www.itwperformancepolymers.com