

Technical Information Sheet



QuickSeam™ Flashing

Item Description	Item Number
5" x 100' (127 mm x 30.5 m)	W56RAC1615

Description

QuickSeam Flashing is a semi-cured EPDM flashing laminated to cured seam tape; used to flash gravel stops and other details as specified in Elevate Specifications and Details.

Method of Application

1. Use QuickPrime™ Plus and QuickScrubber™ or QuickScrubber Plus pad and handle to clean and prime membrane and metal mating surfaces.
2. Refer to Elevate Specifications and Details.
3. Refer to application instructions for specifics: www.HolcimElevate.com.

Storage

- Store in original unopened containers indoors at temperatures between 60 °F (15.6 °C) and 80 °F (26.7 °C).
- Do not store on roof in direct sunlight or at temperatures above 80 °F (26.7 °C).
- When exposed to lower temperatures; restore to room temperature prior to use.

Shelf Life


Shelf life of one year can be expected when stored in original container at temperatures between 60 °F (15.6 °C) and 80 °F (26.7 °C). Shelf life will be shortened if exposed to elevated temperatures.

Precautions

- Refer to Safety Data Sheets (SDS) for additional safety information.
- QuickSeam Flashing is semi-cured. Do not stretch.

LEED® Information

Post-Consumer Recycled Content: 0%
 Post Industrial Recycled Content: 0%
 Manufacturing Location: Prescott, AR
NOTE: LEED® is a registered trademark of the U.S. Green Building Council

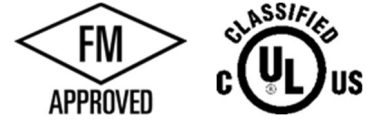

Packaging

- 2 – 5" (127 mm) x 100' (30.5 m) rolls per carton (Rolls may consist of two separate sections of QuickSeam Flashing to make 100')
- 36 cartons per pallet

NOTE: QuickScrubber and/or QuickScrubber Plus pads and handles are included in each carton. Quantities vary depending on the QuickSeam product.

Typical Properties	
Properties	Value
QuickSeam Tape	
Base	Rubber Polymers
Color	Black
Solvents	None
Solids	100%
Cured State	Cured
Thickness	0.045" (1.14 mm) ± 0.005" (0.13 mm)
Width	5¼" (133.4 mm) + 0, - 1/16"
Length	100' (30.5 m)
Flashing Material	
Base	EPDM
Color	Black
Solvents	None
Solids	100%
Cured State	Semi-Cured
Thickness	0.045" (1.14 mm) ± 10%
Width	5" (127 mm) + 0, - 1/8"

Please contact Holcim Technical Services at 800-428-4511 for further information.

This sheet is meant to highlight Elevate products and specifications and is subject to change without notice. Holcim takes responsibility for furnishing quality materials that meet published Elevate product specifications or other technical documents, subject to normal manufacturing tolerances. Neither Holcim nor its representatives practice architecture. Holcim offers no opinion on and expressly refuses any responsibility for the soundness of any structure. Holcim accepts no liability for structural failure or resultant damages. Consult a competent structural engineer prior to installation if the structural soundness or structural ability to properly support a planned installation is in question. No Holcim representative is authorized to vary this disclaimer.

Firestone, the brand of premier roofing, wall, and lining systems you know and trust, will be coming to you under a new name: Elevate. During our transition, products carrying the brand name **Firestone** will change to **Elevate** on product labels and packaging, Technical Information Sheets, and elsewhere. Only the brand name is changing. Our products remain the same.

For further information on our brand transition to Elevate, scan the code below with your smartphone, or visit our website: www.holcimelevate.com

