

**NEW**

# Crack Repair SLV

Low-Viscosity Polyurethane Crack Repair  
for Horizontal Surfaces



**FIVE STAR**

Specified by the World's Best™

# Five Star® Crack Repair SLV


This very low viscosity, two-component hybrid polyurethane has been specifically engineered for use as an easy to apply, rapid curing concrete repair material requiring minimal down time. Its low viscosity offers deep penetration into hairline cracks for structural repair. By adding aggregate this product can also be used for very fast turnaround spall and joint repairs.

## ADVANTAGES

- Very low viscosity
- Fast turnaround
- Can be used in temperatures ranging from 0° F to 115° F (-18° to 46° C)
- Traffic ready in 1 hour
- Solvent free / No VOC content
- Self-leveling

## USES

- Industrial floor repair
- Spall repair when mixed with aggregate
- Fill hairline cracks
- Parking deck and concrete bridge repair
- Interior and exterior application with minimal color change
- Provides a continuous surface for weight loading

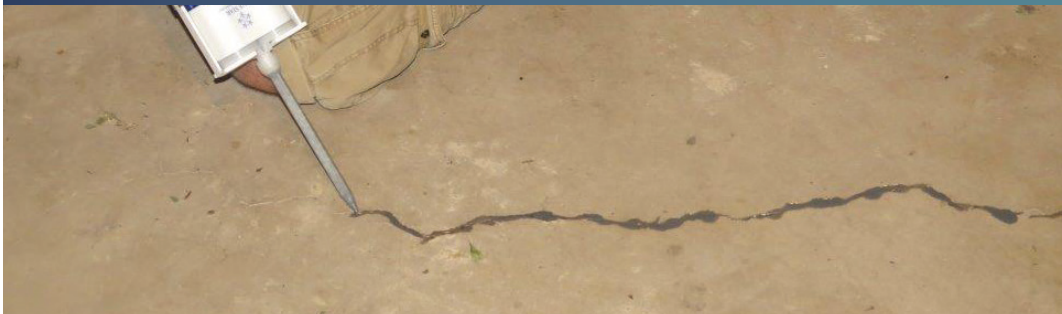

| SKU/PRODUCT CODE | DESCRIPTION                 | UNIT SIZE                   |
|------------------|-----------------------------|-----------------------------|
| 30792            | Five Star® Crack Repair SLV | 21.2 oz. (627 ml) Cartridge |



**FIVE STAR**

Specified by the World's Best™



FIVE STAR PRODUCTS, INC.  
60 Parrott Drive • Shelton, CT 06484-4733 USA  
Phone: +1 203-336-7900 • Fax: +1 203-336-7930  
Support: 1-800-243-2206

**FiveStarProducts.com**

Contact your  
local sales representative  
or call us directly  
for more information.