


PRODUCT DETAIL

INSTALLATION DETAIL / Cross Section

T20 / T21 J CHANNEL LAP

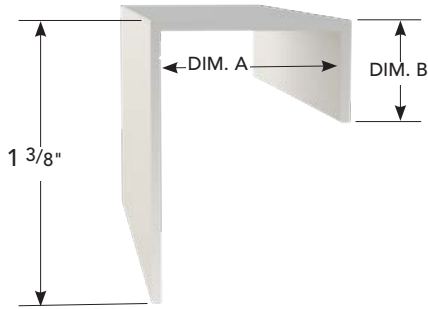

USAGE

The J Channel Lap creates a traditional termination of 5/16" fiber cement lap siding. The J Channel Lap can be used in vertical and horizontal applications, hiding imperfections in field cuts. Ideal usage at terminations between window sills, jambs, and general terminations. The J Channel Lap is available in 10' lengths and a variety of finishes.

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet J Channel Lap as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5. Available in primed, clear anodized, powder coated, or custom finish. Refer to finish section on page 73.

NOTE

To be used in vertical applications. If used horizontally, do not install with the short leg pointing upwards where moisture can accumulate. Attach panel in accordance with the panel manufacturer's fastening schedule.

SIZES

	DIM. A	DIM. B	NUMBER
T20	3/4"	3/8"	FCP-JAM75
T21	7/8"	1/2"	FCP-JAM875

