



Cobra® SnowCountry® Advanced Premium Exhaust Vent for Roof Ridge

Remove excess heat and moisture from your attic and protect your roof system from premature deterioration

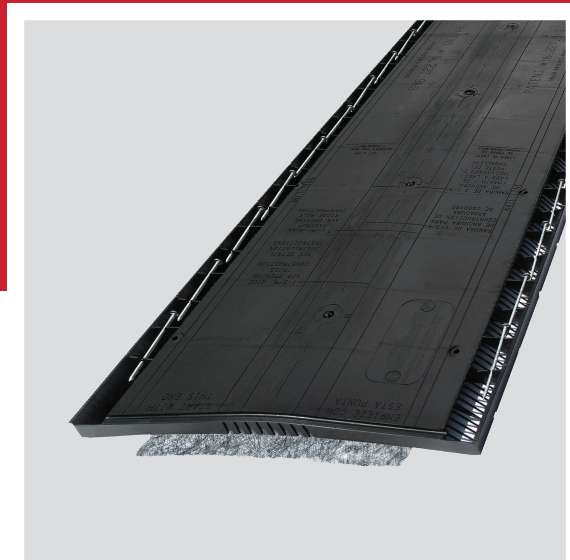

- Improve energy efficiency by reducing attic heat and your summer air-conditioning load
- Limit the growth of harmful mold and mildew
- Minimize peeling of paint inside and out

Cobra® SnowCountry® Advanced Premium Exhaust Vent for Roof Ridge



Benefits:

- **Allows heat and moisture to escape** at the most effective location—the ridge
- **Shingle-over design** blends into the ridge line
- **Engineered for durability** with high-impact UV-resistant polymers
- **External baffles** with crush-resistant internal structure
- **Snow Guard™ Filter** helps resist snow, pine needle, and insect infiltration while avoiding dust clogging — meets the requirements of ICC Dust Exposure testing¹
- **Includes 3" (76 mm) corrosion-resistant ring shank nails** included for proper fastening of the vent and cap shingles
- **Unique EasyTear® Sizing Feature** allows you to hand-tear the vent in 3" (76 mm) increments — no cutting and less waste
- **Passes the 110 mph wind-driven rain test²**
- **Eligible for up to a Lifetime† limited warranty.** It's also an eligible accessory product in the Attic Ventilation category of GAF residential enhanced warranties.

Balanced Ventilation:

Balanced attic ventilation means there's an equal amount of air entering it as there is exiting it. The amount of exhaust ventilation must **never** exceed the amount of intake ventilation at the soffits or eaves. GAF recommends a minimum of 1 sq. ft. of net free ventilation for every 300 sq. ft. of attic floor space. Always consult local building codes for specific ventilation requirements.

How Much Do I Need?

Calculate the total square footage of your attic floor space and then review the chart below for how much Cobra® SnowCountry® Advanced Premium Exhaust Vent for Roof Ridge is needed:

Total attic sq. footage	Recommended length of Cobra® SnowCountry® Advanced Premium Exhaust Vent (ft.)	Minimum Intake Ventilation (net free area in sq. in.)
1600	22	396
1900	26	468
2200	30	540
2500	34	612
2800	38	684
3100	42	756
3400	46	828

Note: Chart above based on 1/300 rule. Always have a balanced attic ventilation system. In no case should the amount of exhaust ventilation at or near the ridge exceed the amount of intake ventilation at or near the soffit. Visit gaf.com/ventcalculator for more details.

Product details:

- For use in colder climates
- 11.5" (292 mm) width — for 12" (305 mm) width ridge cap shingles
- 9" (229 mm) width — for 10" (254 mm) width ridge cap shingles
- 18 sq. inches per lineal foot (38,100 mm² per lineal meter) of net free ventilating area
- Hand nail installation with included 3" (76 mm) ring shank nails
- For roof pitches 3:12 to 16:12

Code Approvals & Standards

- Miami-Dade County Product Control Approved
- State of Florida Approved
- UL ER15072-01
- Texas Department of Insurance Product Evaluation RV-29
- CCMC 14083-R
- UL Listed to ANSI/UL 790 Class C³



1. Warm, moist air escapes attic through **Cobra® SnowCountry® Advanced Exhaust Vent for Roof Ridge** (installed under ridge cap shingles)
2. Fresh air enters attic through intake vent at the soffit or eave

¹ Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See the *GAF Roofing System Limited Warranty* for complete coverage and restrictions. For installations not eligible for the *GAF Roofing System Limited Warranty*, see the *GAF Shingle & Accessory Limited Warranty*. Visit gaf.com/LRS for qualifying GAF products.

² Tested in accordance with ICC AC132, Section 4.2.

³ Under controlled laboratory testing conducted by GAF.

³ Refer to UL Online Certification Directory for actual assemblies.



To learn more about the Lifetime† Roofing System visit gaf.com/Lifetime



We protect what matters most™

