




EVERGUARD EZ FASCIA

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

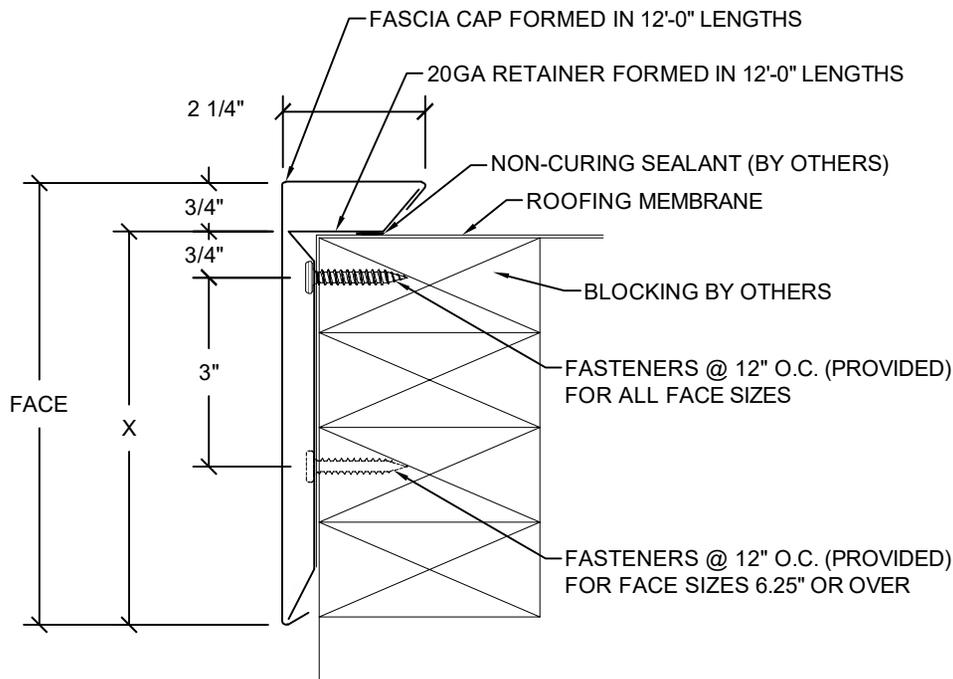

* NOTES

- Fascia cover provided with splice plates
- 3.5" face height only available in 24 ga. galv steel and .040" aluminum
- Universal fasteners are provided for use with all substrates
- Pre-drill with 3/16" in. drill for masonry conditions
- Product cannot be installed on conditions smaller than 5 ft. radius
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 381 psf

APPROVALS



ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

GAF
1 Campus Drive,
Parsippany, NJ 07054
USA
973-628-3000
WWW.GAF.COM

SHT# 1 of 1

DATE: 04/29/22

DRN BY: PL

CKD BY: KP

DWG #: 25010-36946

REV: A

DIMENSIONS

PRODUCT ID. NO.	FACE HEIGHT	X DIM	NAILER COVERAGE
<input type="checkbox"/> TE-350*	3 1/2"	2 3/4"	1 NAILER
<input type="checkbox"/> TE-475	4 3/4"	4"	2 NAILERS
<input type="checkbox"/> TE-625	6 1/4"	5 1/2"	3 NAILERS
<input type="checkbox"/> TE-775	7 3/4"	7"	4 NAILERS

MATERIAL

- 24 Ga. Galv. Steel
 - 22 Ga. Galv. Steel
 - .040" Aluminum
 - .050" Aluminum
 - .063" Aluminum
 - OTHER: _____
- Color: _____
Finish: _____
- Substrate:** Wood
If substrate is not given, wood fasteners will be provided. Masonry Metal

QUANTITIES

- _____ Straight Lineal Feet (12'-0" Lengths)
- _____ Radius Lineal Feet (4'-0" Lengths)*
- _____ Outside Miter (90°) (Cover Only)
- _____ Inside Miter (90°) (Cover Only)
- _____ Right Endcaps
- _____ Left Endcaps
- _____ Right Endwall Flashing
- _____ Left Endwall Flashing
- _____ Downspout Scupper
- _____ Spillout Scupper