



EverGuard EXTREME[®]

Advanced Protection[®] TPO

Accessory

TPO ACCESSORIES

Description

EverGuard Extreme[®] TPO Expansion Joints provide roofing contractors with an easy-to-install factory-built detail. EverGuard Extreme[®] TPO Expansion Joints are constructed from GAF's proven, durable, high-performance EverGuard Extreme[®] TPO.

- **Cost effective...**
Reduces installed costs
- **Improved reliability...**
Factory-built accessories reduce risk of leaks and callbacks
- **Improved aesthetics...**
Uniform look

Application

EverGuard Extreme[®] TPO Expansion Joints are designed for use with GAF EverGuard Extreme[®] TPO. EverGuard Extreme[®] TPO Expansion Joints are available in two prefabricated styles:

- Roof-to-Roof
- Roof-to-Wall

EverGuard Extreme[®] TPO Expansion Joints are heat-weldable to EverGuard Extreme[®] TPO, forming a strong monolithic bond. See published application and specifications manual for detailed instructions.


Measuring Tips

When ordering EverGuard Extreme[®] TPO Expansion Joints, it is important to specify the correct bellows width.

1. Measure the opening distance of the joint.
2. Multiply this distance by 1.5.
3. Round up to the next even number.
This number is the bellows width.

Example (English):

1. Width = 3.325"
 2. Multiply 3.325 x 1.5 = 4.9875
 3. Round 4.9875 up to the next even number = **6**
- Order **6"** bellows width

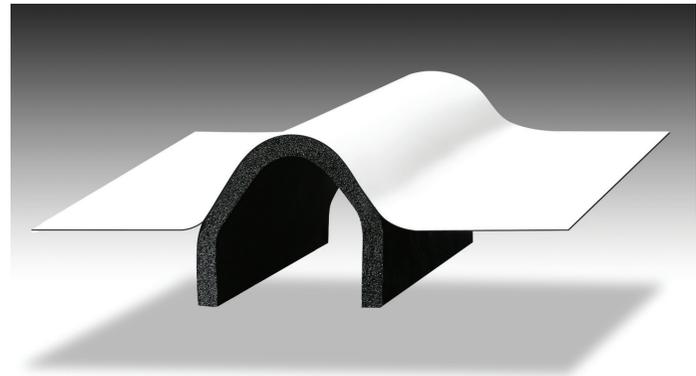

Expansion Joint

- Available in 5 standard bellows widths
- Available in 2 styles: Roof-to-Roof and Roof-to-Wall
- Custom sizes also available*

SPECIFICATIONS	
Standard roll length:	50' (15.24 m)
Membrane thickness:	60 mil nominal

*Contact your local representative for details.

Example (Metric):

1. Width = 84.46 mm
 2. Multiply 84.46 x 1.5 = 126.69
 3. Round 126.69 up to the next even number = **128**
- Order **128 mm** bellows width

Quality You Can Trust...From North America's Largest Roofing Manufacturer![™]

gaf.com

Visit gaf.com to see our full line of prefabricated accessories!