



# EVERGUARD® TPO

# TPO Accessories

## Description

EverGuard® TPO Expansion Joints provide roofing contractors with an easy-to-install factory-built detail. EverGuard® TPO Expansion Joints are constructed from proven, durable, high-performance EverGuard® TPO.

- **Cost effective...**  
Reduces installed costs
- **Improved reliability...**  
Factory-built accessories reduce risk of leaks and callbacks
- **Improved aesthetics...**  
Uniform look

## Application

EverGuard® TPO Expansion Joints are designed for use with GAF EverGuard® TPO. EverGuard® TPO Expansion Joints are available in two prefabricated styles:

- Roof-to-Roof
- Roof-to-Wall

EverGuard® TPO Expansion Joints are heat-weldable to EverGuard® TPO, forming a strong monolithic bond. See published application and specifications manual for detailed instructions.

## Measuring Tips

When ordering EverGuard® TPO Expansion Joints, it is important to specify the correct bellows width.

1. Measure the opening distance of the joint.
2. Multiply this distance by 1.5.
3. Round up to the next even number.  
This number is the bellows width.

### Example (English):


1. Width = 3.325"
2. Multiply 3.325 x 1.5 = 4.9875
3. Round 4.9875 up to the next even number = **6**

Order **6"** bellows width

### Example (Metric):

1. Width = 84.46 mm
2. Multiply 84.46 x 1.5 = 126.69
3. Round 126.69 up to the next even number = **128**

Order **128 mm** bellows width

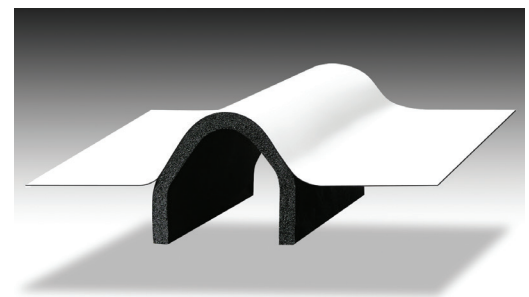

## Expansion Joint

- Available in 5 standard bellows widths
- Available in 2 styles: Roof-to-Roof and Roof-to-Wall
- Custom sizes also available\*

\*Contact your local representative for details.

SPECIFICATIONS	
Standard roll length:	50' (15.24 m)
Membrane thickness:	60 mil nominal

Quality You Can Trust...From North America's Largest Roofing Manufacturer!™

[gaf.com](http://gaf.com)

Visit [gaf.com](http://gaf.com) to see our full line of prefabricated accessories!