
SINGLE-PLY: TPO & PVC

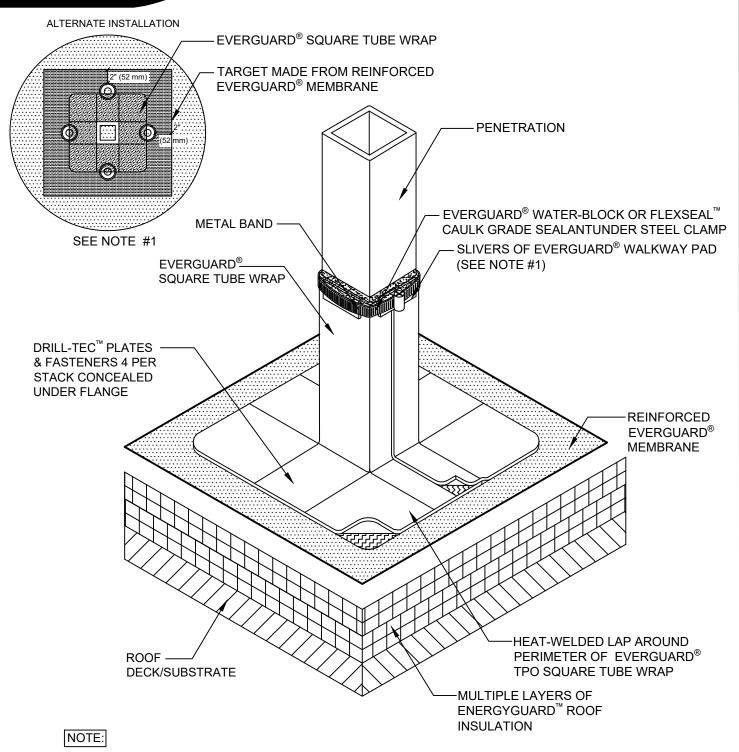

- 1. IF A TIGHTER FIT IS REQUIRED AT THE TOP OF THE WRAP, INSERT SLIVERS OF WALKWAY PAD BETWEEN THE BAND AND THE MEMBRANE ON ALL FOUR SIDES.
- 2. IF PLATES AND FASTENERS ENCROACH INTO THE SEAM AREA OF THE POCKET, THEN A TARGET MUST BE ADDED FIRST TO COVER FASTENERS.
- 3. 25 YEAR GUARANTEES AND ABOVE MUST USE EXTREME ACCESSORIES.
- 4. THE EXISTING PROJECTION MUST BE CLEAN OF ALL DEBRIS BEFORE INSTALLATION.

GAF	SQUARE TUBE WRAP DETAIL				LEGEND	
	527		THIS DETAIL APPLIES TO:	ISSUE / REVISION DATE	SCALE	HEAT-WELDED LAP FLEXSEAL™ CAULK GRADE SEALANT
		ALL SYSTEMS	8/17/20	N.T.S.	to the property of	