


## EverGuard® TPO **GAF** WalkwayRoll

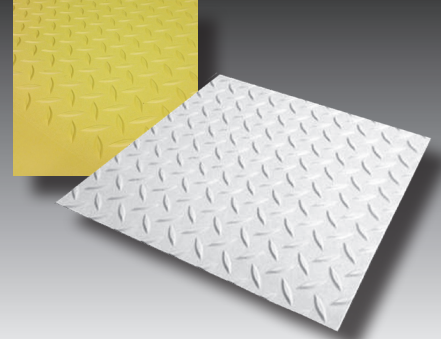

### Description:

Protect rooftop membranes exposed to repeated foot traffic with EverGuard® TPO Walkway Roll. Used around HVAC areas, hatches, doors, and other access points, it features a raised diamond pattern for enhanced traction and smooth edges for better welding. Factory-built accessories reduce risk of leaks and callbacks. This easy-to-install accessory saves time and labor costs, and helps create a uniform aesthetic.

### Application:

- Heat-weld EverGuard® TPO Walkway Roll to the roof membrane surface continuously around the walkway roll perimeter. Rolls must be spaced at least 6" (152 mm) apart to allow for drainage.

- EverGuard® TPO Walkway Roll is designed for use with all EverGuard® and EverGuard Extreme® TPO membranes.
- See published application and specifications manual for detailed instructions.

### Product Information:

EverGuard® TPO Walkway Roll is made from recycled EverGuard® TPO. The roll measures 34" x 50' (864 mm x 15.24 m) and the diamond pattern measures 30" (762 mm) with 2" (51 mm) smooth sides for welding. Each roll weighs 75 lb. (34.02 kg) (nominal) and provides 125-mil thickness. Rolls are available in standard gray or safety yellow.



Visit [gaf.com](https://www.gaf.com)

For additional information, contact GAF Technical Support at **1-800-766-3411** or [technicalquestions@gaf.com](mailto:technicalquestions@gaf.com)

We protect what matters most™

