

# GAFMC SBS COLD APPLIED MODIFIED BITUMEN ROOFING SYSTEMS KEY TO SPECIFICATION NUMBERS

Substrate	
N	Nailable
NN	Non-nailable
I	Insulated
R	Recover over existing roof. May include additional insulation

Application Method	
CA	Cold Applied Adhesive
These specifications can be applied using RUBEROID® Modified Bitumen Adhesive. References to cold applied installations require the specification designation to be followed by a “(CA)” to indicate that it is to be cold applied.	

I - 1 - 2 - 20 / MGP (CA)


Number of Base Plies	
0	None
1	One Ply
2	Two Plies
3	Three Plies

Base plies can include:  
 GAFGLAS® #75 Base Sheet,  
 GAFGLAS® #80 Ultima™ Base Sheet, RUBEROID® Modified Base Sheet, GAFGLAS® Stratavent® Eliminator™ Nailable, GAFGLAS® FlexPly™ 6 or GAFGLAS® Ply 4.

Top Ply/Ply of RUBEROID® Membranes	
MG	RUBEROID® Mop (Granule)
MS	RUBEROID® Mop (Smooth)
MGFR	RUBEROID® Mop 170FR
MGP	RUBEROID® Mop Plus
MGPFR	RUBEROID® Mop FR
20	RUBEROID® 20
30	RUBEROID® 30
30FR	RUBEROID® 30FR

Number of Plies of RUBEROID® Membranes	
1	One Ply
2	Two Plies

Cold Applied Systems

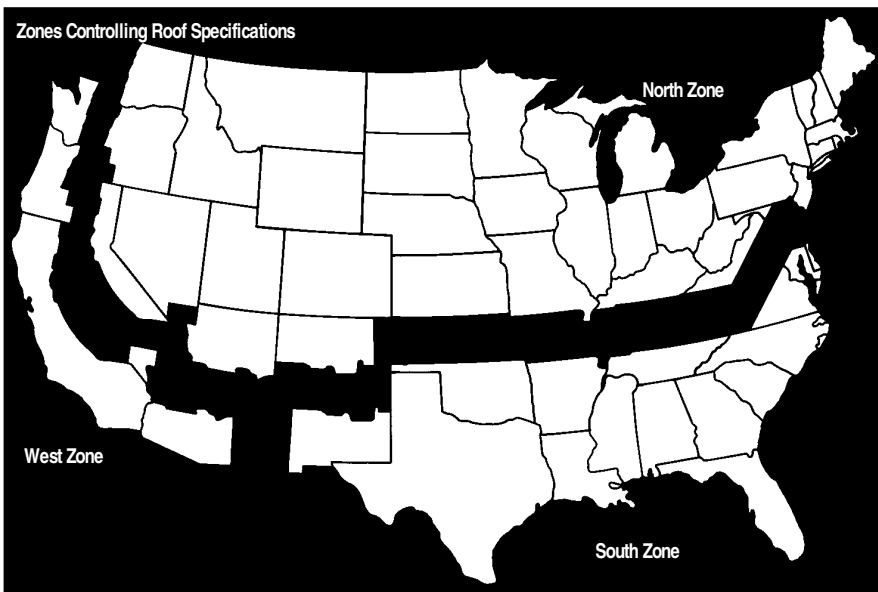

North Zone includes Alaska  
 West Zone includes Hawaii  
 South Zone includes Puerto Rico  
 Note: The West Zone comprises low elevation regions only. Mountainous areas in the South and West Zones should comply with North Zone specifications.