


# LIBERTY™ SBS Self-Adhering Cap Sheet

Granule-surfaced roofing membrane provides durable protection for residential low-slope areas

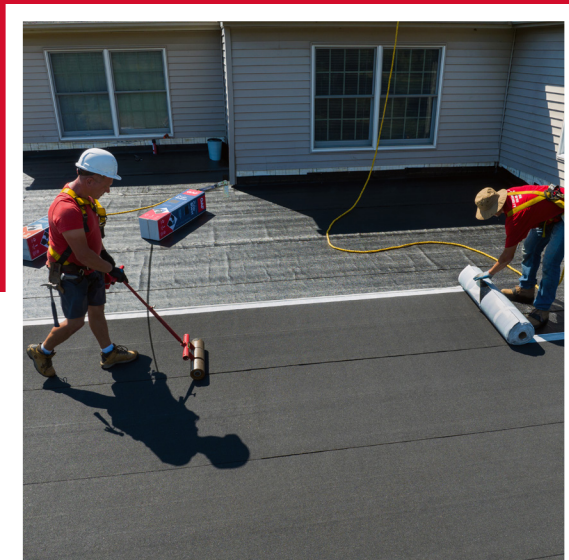

- Perfect for low-slope roofs such as on porches, garages, carports, and sheds.
- Self-adhering installation eliminates open flames, hot asphalt, or dangerous chemicals on your roof.

# LIBERTY™ SBS Self-Adhering Cap Sheet

## Description:

LIBERTY™ SBS Self-Adhering Cap Sheet is a durable modified bitumen granule-surfaced membrane designed and manufactured to meet relevant industry and code requirements. The product is designed for use as a waterproofing membrane and is reinforced with a polyester mat coated with polymer-modified asphalt.

## Uses:

LIBERTY™ SBS Self-Adhering Cap Sheet is designed to be used with LIBERTY™ SBS Self-Adhering Base/Ply Sheet to help protect low-slope areas (1/2:12 – 3:12) of your roof.

## Advantages:

- LIBERTY™ systems are applied without torches, open flames, hot asphalt, or messy solvent-based adhesives and are suitable for primed plywood decks and other substrates.
- Available in seven colors to help complement popular Timberline® and other GAF asphalt shingle colors.
- Up to 20-Year Limited Warranty against manufacturing defects available, depending on system.\*

## Application:

LIBERTY™ SBS Self-Adhering Cap Sheet is applied to approved substrates using its unique self-adhering formulation. Technical and sales information can be obtained through Technical Services at 877-GAF-ROOF.

## Application Standards:

|  |   |
|--|---|
| <ul style="list-style-type: none"> <li>UL Listed to ANSI/UL790<sup>‡</sup>, Class C</li> </ul> |  |
| <ul style="list-style-type: none"> <li>FM Approved<sup>§</sup></li> </ul>                      |  |
| <ul style="list-style-type: none"> <li>Miami-Dade County Product Control approved</li> </ul>   |  |
| <ul style="list-style-type: none"> <li>State of Florida Approved</li> </ul>                    |   |
| <ul style="list-style-type: none"> <li>Texas Dept. of Insurance Report RC-121</li> </ul>       |   |
| <ul style="list-style-type: none"> <li>ASTM D6164 Type I, Grade G</li> </ul>                   |   |

## This product meets or exceeds the following ASTM D6164 Type I, Grade G minimum requirements:

| Properties                            | Test Method | Value |
|---------------------------------------|-------------|-------|
| Tensile Strength @ 0°F (min), lbf/in. | ASTM D5147  | 70    |
| Elongation @ 0°F (nom.), %            | ASTM D5147  | 20    |
| Low-Temperature Flexibility (max), °F | ASTM D5147  | 0     |
| Tear Strength (min.), lbf             | ASTM D5147  | 55    |
| Dimensional stability, (max) %        | ASTM D5147  | 1     |

**Note:** Values stated are approximate and subject to normal manufacturing variation. These values are not guaranteed and are provided solely as a guide. GAF reserves the right to change or modify, at its discretion, any of the information, requirements, specifications, or policies contained in this document.

## Product Details:


|                    |  |
|--------------------|--|
| Roll size          | 1 square — excludes laps <sup>†</sup><br>(1111.6 gross sq. ft.) (10.4 m <sup>2</sup> ) |
| Roll length        | 34.0' (10.4 m)   |
| Roll width         | 39.375" (1.0 m)  |
| Aprox. roll weight | 96.4 lb. (43.7 kg)   |
| Product thickness  | 0.157" (4 mm)  |

\* Exclusions apply. See *Limited Warranty on LIBERTY™ SBS Self-Adhering Materials* for complete coverage and restrictions.

<sup>†</sup> Installed coverage will be lower and depend on quantity and width of side and end laps.

<sup>‡</sup> Refer to UL Product iQ for actual assemblies.

<sup>§</sup> Refer to FM RoofNav.com for actual assemblies.



For questions on application, contact GAF at **877-GAF ROOF** or visit [gaf.com/Liberty](http://gaf.com/Liberty)

We protect what matters most™

