

These shingles MUST be nailed a nominal 5-5/8" (143mm) from bottom of of shingle, above the cut outs, as shown. Nails must not be exposed.

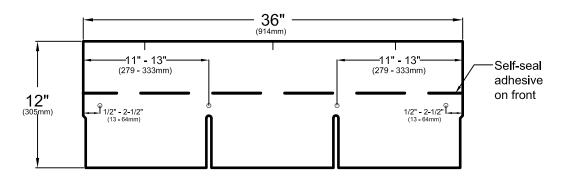

STANDARD NAILING PATTERN - four nails per shingle

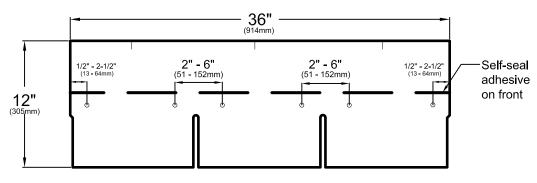

ENHANCED NAILING PATTERN - six nails per shingle*

* required by some local codes and required for enhanced wind coverage on certain products.

See limited warranty for details.

1361 Alps Rd. Wayne, NJ 07470 www.gaf.com	ROYA SOVERE Shingles	L	NAIL PLACEMENT DETAIL English Size Shingles	03a
	REVISION DATE 1-01-12	SCALE N.T.S		SS-RS