


Extend non-corroding metal counter flashing over base flashing.

Use one piece metal non-corroding step flashing for each course. Seal overlying shingles to step flashing with asphalt plastic cement.



At least 4"  
(102mm)

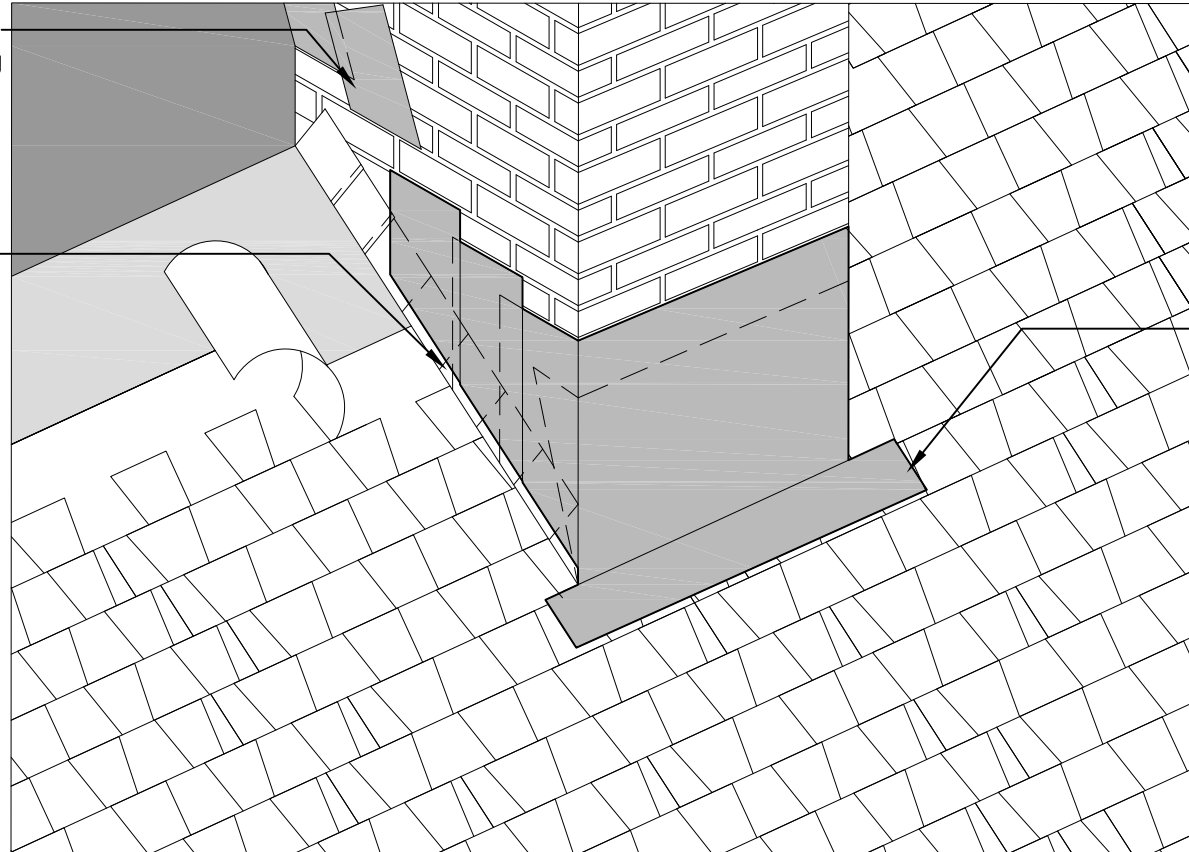

1361 Alps Rd.  
Wayne, NJ 07470  
www.gaf.com

BRAND SERIES  
**TIMBERLINE**  
**SERIES**  
Lifetime Shingles

REVISION DATE  
1-01-12

SCALE  
N.T.S

## CHIMNEY FLASHING DETAIL

DETAIL NUMBER

**07**

DETAIL REFERENCE

**SS-TS**