


Extend non-corroding metal counter flashing over base flashing.

Use one piece metal non-corroding step flashing for each course. Seal overlying shingles to step flashing with asphalt plastic cement.



At least 4"
(102mm)

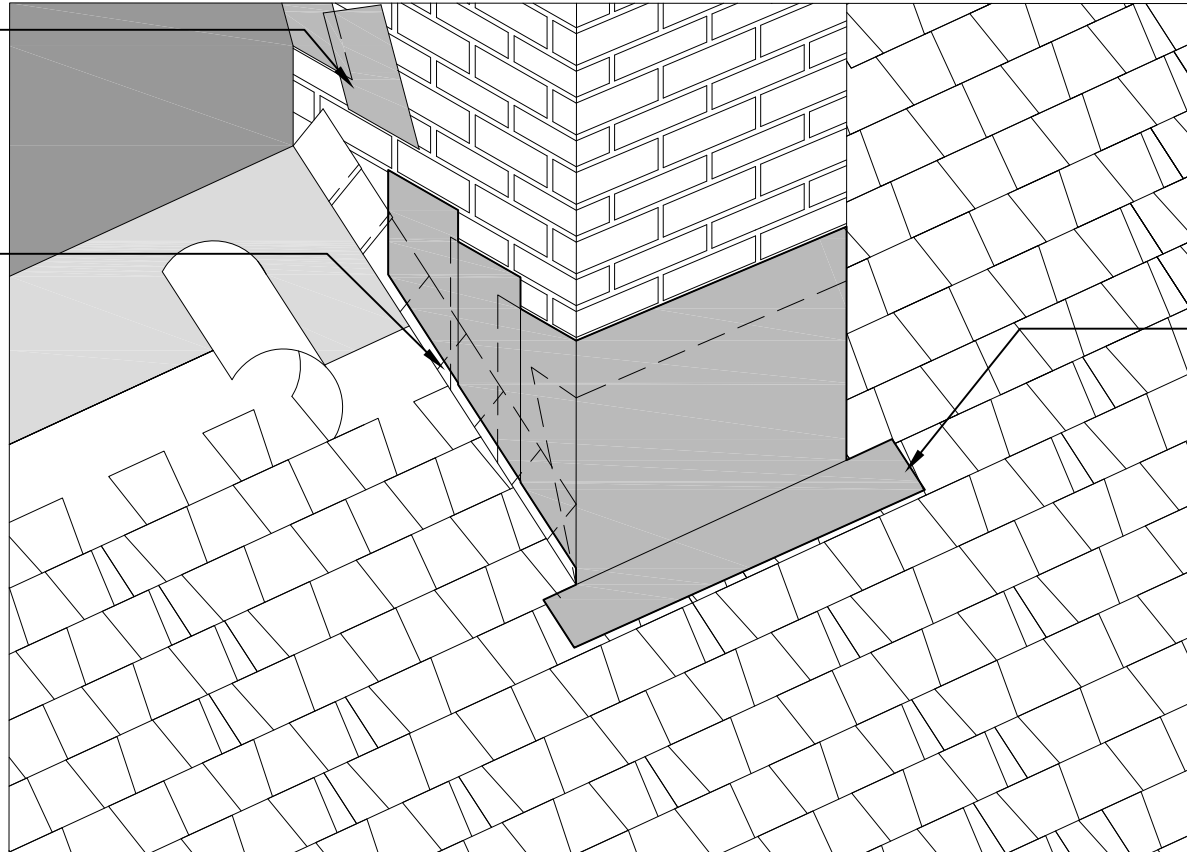

1361 Alps Rd.
Wayne, NJ 07470
www.gaf.com

BRAND SERIES
TIMBERLINE
SERIES
Lifetime Shingles

REVISION DATE
1-01-12

SCALE
N.T.S

CHIMNEY FLASHING DETAIL

DETAIL NUMBER

07

DETAIL REFERENCE

SS-TS