



● Compliance with International Codes  
● Compliance with State Codes

# ICC-ES Evaluation Report

## ESR-3267

Reissued December 2021

Revised December 2022

This report is subject to renewal December 2023.

**DIVISION: 07 00 00—THERMAL AND MOISTURE PROTECTION**  
**Section: 07 31 13—Asphalt Shingles**

**REPORT HOLDER:**

GAF

**EVALUATION SUBJECT:**

GAF SHINGLE ROOF COVERING SYSTEMS

**1.0 EVALUATION SCOPE**

**Compliance with the following codes:**

- 2021, 2018, 2015, 2012, 2009 and 2006 *International Building Code*® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 *International Residential Code*® (IRC)

**Properties evaluated:**

- Weather resistance
- Fire classification
- Wind resistance

**2.0 USES**

The GAF asphalt shingles described in this report are alternatives to asphalt shingles complying with IBC Section 1507.2 and IRC Section R905.2 and are Class A roof coverings when installed as described in this report.

**3.0 DESCRIPTION**

**3.1 Shingles:**

**3.1.1 General:** The GAF asphalt shingles comply with the ICC-ES Acceptance Criteria for Alternative Asphalt Roofing Shingles (AC438), and have been qualified for wind resistance as noted in Section 4.3 and Table 1. The shingles are available as three-tab, five-tab and laminated asphalt shingle roof coverings. See Table 1 and Figure 1 for recognized product names and classifications, shingle types, manufacturing locations, overall dimensions, maximum exposure to the weather and fastening details. The shingles are self-sealing by means of adhesive strips located on either the weather side or the underside. See

Figure 1 for dimensions, nailing locations and adhesive strip location for field shingles.

**3.1.2 Three-tab Shingles and Five-tab Shingles:** Three-tab and five-tab shingles are composed of a single layer of reinforcing felt, impregnated and coated with surfacing material on the weather side and with a surfacing release agent on the underside.

**3.1.3 Laminated Shingles:** Laminated shingles are composed of multiple thicknesses of coated and surfaced reinforcing felt, cut and bonded together in different patterns. The weather side is surfaced with surfacing material on the weather side and with a surfacing release agent on the underside.

**3.1.4 Hip and Ridge Cap Shingles:** Hip and ridge cap shingles consist of reinforcing felt, impregnated and coated with asphalt on both sides and surfaced with surfacing material on the weather side and a surfacing release agent on the back side for use in covering hips and ridges. See Table 2 for product sizes, exposure to the weather and manufacturing locations. See also Figure 2.

**3.1.4.1 Royal Sovereign® Ridge Cap Shingles:** These ridge cap shingles are field-cut from Royal Sovereign® three-tab strip shingles. The field-cut ridge cap shingles are compatible with any of the GAF shingles recognized in this report.

**3.1.4.2 Z®Ridge Distinctive Ridge Cap Shingles:** These shingles are strips that are scored for separation into four ridge cap shingles.

**3.1.4.3 Seal-A-Ridge® Ridge Cap Shingles and Seal-A-Ridge® AS SBS-Modified IR Ridge Cap Shingles:** These shingles are strips that are scored for separation into three ridge cap shingles.

**3.1.4.4 Ridglass® Premium Ridge Cap Shingles:** These shingles are individual, thick, ultra-high-profile ridge cap shingles.

**3.1.4.5 TimberTex® Premium Ridge Cap Shingles:** These shingles are double layer strips that are scored for separation into three ridge cap shingles.

**3.1.4.6 TimberCrest® Premium SBS-Modified Ridge Cap Shingles:** These shingles are individual, thick, ultra-high profile ridge cap shingles with a bullnose leading edge.

### 3.1.5 Starter Shingles:

**3.1.5.1 General:** Starter Strip shingles are factory-made shingles used under the first course of shingles being installed or applied on the roof. See Table 2 for product sizes and manufacturing locations. See also Figure 3.

**3.1.5.2 Pro-Start® Starter Strip Shingles:** These shingles are strips that are scored for separation into two starter shingles. The surfacing material is on the weather side, with a surfacing release agent on the underside. The self-sealing strip edge is applied facing up and along the roof eave or rake edge.

**3.1.5.3 WeatherBlocker™ Premium Starter Strip Shingles:** These starter shingles are strips with perforations to assist with alignment of various shingle sizes. The mineral surfacing is on the weather side, with fine surfacing material on the underside.

**3.1.5.4 StarterMatch® Starter Strip Shingles and StarterMatch™ Complementary Color Starter Strip Shingles:** These starter shingles are color coordinated to match the GAF Grand Sequoia®, Grand Sequoia® AS, Grand Sequoia® ArmorShield® and Grand Canyon® field shingles. The starter shingles must be installed as the second starter at the eaves on Grand Sequoia®, Grand Sequoia® AS, Grand Sequoia® ArmorShield® and Grand Canyon® applications.

### 3.2 Fasteners:

Fasteners must comply with ASTM F1667 and must be minimum No. 12 gage [0.105-inch-diameter (2.67 mm) shank], <sup>3</sup>/<sub>8</sub>-inch-diameter-head (9.5 mm), galvanized, stainless steel, aluminum or copper, barbed-, deformed-, or smooth-shank roofing nails. Fasteners must be of sufficient length to penetrate <sup>3</sup>/<sub>4</sub> inch (19.1 mm) into the sheathing, or through the sheathing, whichever is less.

### 3.3 Underlayment:

Under the 2021 and 2018 IBC, the roof underlayment must be in accordance with Section 1507.1.1 and Table 1507.1.1(1). Under the 2015, 2012, 2009 and 2006 IBC, the roof underlayment must be in accordance with Section 1507.2.3. Under the 2021, 2018 and 2015 IRC, the roof underlayment must be in accordance with Section R905.1.1 and Table R905.1.1(1). Under the 2012, 2009 and 2006 IRC, the roof underlayment must be in accordance with Section R905.2.3. Underlayment must comply with ASTM D226 Type I or Type II; ASTM D4869 Type I, Type II, Type III or Type IV; or ASTM D6757.

### 3.4 Asphalt Cement:

Asphalt roofing cement used for hand-sealing the shingles must comply with ASTM D4586, Type I, Class I, or Type II, Class I.

## 4.0 INSTALLATION

### 4.1 New Construction:

#### 4.1.1 General:

When installed on new construction in accordance with this section, the shingles are a Class A roof covering. The shingles, underlayment and flashings must be installed in accordance with IBC Section 1507.2 or IRC Section R905.2 except as noted in this report. The shingles must be installed over roof decks of code-complying, minimum <sup>3</sup>/<sub>8</sub>-inch-thick (9.5 mm) exterior-grade plywood; <sup>7</sup>/<sub>16</sub>-inch-thick (11.1 mm) oriented strand board (OSB); or nominally 1-inch-by-6-inch lumber installed as solid sheathing conforming to 2021, 2018 and 2015 IBC Sections 2304.8.2 or 2308.7.10 (2012, 2009, and 2006 IBC Section 2304.7.2 or 2308.10.8) or IRC Section R803, as applicable, and underlayment in

accordance with Sections 3.3 and 4.1.2.4. Minimum roof slope must be 2:12 (16.7 percent).

### 4.1.2 Application:

**4.1.2.1 Fastening:** Fasteners are as described in Section 3.2. Shingles must be fastened to the roof deck with a minimum of four fasteners or as shown in the Standard Nailing Pattern in Figure 1. Spacing of fasteners must be as shown in Figure 1, and each course of shingles must be offset from the preceding course as shown in the manufacturer's published installation instructions.

**4.1.2.2 Shingle Sealing:** In colder climates or wind regions where it is questionable whether the factory-applied adhesive will activate and seal the shingles, to ensure sealing, the shingles must be hand-sealed with a minimum of three 1-inch-diameter (25.4 mm) spots of asphalt roofing cement equally spaced on the unexposed surface across each shingle. For applications on slopes greater than 21:12, hand-sealing is required. Hand-sealing consists of applying a minimum of three 1-inch-diameter (25.4 mm) spots of asphalt roofing cement on the unexposed surface, equally spaced across each shingle. For three-tab and five-tab shingles, one spot of asphalt roofing cement is placed under each corner of each tab (two spots per tab); the tab must then be pressed into the cement. For laminated shingles, four equally spaced spots of asphalt roofing cement are placed under the exposed portion of the shingle; the shingle must then be pressed into the cement. See the manufacturer's published installation instructions for hand-sealing guidelines. The shingles must be hand-sealed to the satisfaction of the code official.

**4.1.2.3 Hip and Ridge Cap Shingles:** Hip and ridge cap shingles must be placed evenly over hips and ridges (or over shingle-over ridge vents), and fastened to the roof deck with two fasteners, described in Section 3.2 of this report, located on either side of the shingle, on the fastener line shown in Figure 1. Staples must not be used to fasten the ridge cap shingles.

**4.1.2.4 Underlayment:** Under the 2021 and 2018 IBC, the roof underlayment must be installed in accordance with Section 1507.1.1 and Tables 1507.1.1(2) and 1507.1.1(3). Under the 2015, 2012, 2009 and 2006 IBC, the roof underlayment must be installed in accordance with Section 1507.2.8. Under the 2021, 2018 and 2015 IRC, the roof underlayment must be installed in accordance with Section R905.1.1 and Tables R905.1.1(2) and Table R905.1.1(3). Under the 2012, 2009 and 2006 IRC, the roof underlayment must be installed in accordance with Section R905.2.7. Minimum roof slope must be 2:12 (17-percent). For roof slopes greater than 4:12, the roof deck must be covered with a minimum of one layer of underlayment as described in Section 3.3 of this report. For slopes between 2:12 and 4:12, two layers of the underlayment described in Section 3.3 of this report are required. In areas where there has been a history of ice forming along the eaves, causing a backup of water, an ice barrier must be provided in accordance with 2021 and 2018 IBC Section 1507.2.7 (2015, 2012, 2009 and 2006 IBC Section 1507.2.8.2 or 2021, 2018 and 2015 IRC Section R905.2.7 (2012, 2009 and 2006 IRC Section R905.2.7.1) as applicable.

### 4.2 Installation—Reroofing:

When installed over existing Class A or Class C asphalt shingle roofs in accordance with this section, the shingles described in this report are recognized as a Class A roof covering. The existing asphalt shingle roof covering must be inspected in accordance with the provisions and limitations of 2021 IBC Section 1512 [2018 and 2015 IBC Section 1511 (2012, 2009 and 2006 IBC Section 1510)] or 2021, 2018 and

2015 IRC Section R908 (2012, 2009 and 2006 IRC Section R907). Prior to the reroofing, hip and ridge covering must be removed. Except as noted in this section, the shingles must be installed in accordance with Section 4.1 of this report. Fasteners must be of sufficient length to penetrate  $\frac{3}{4}$  inch (19.1 mm) into the sheathing, or through the sheathing, whichever is less. Flashing and edging must comply with the following, as applicable:

- IBC: 2021 IBC Section 1512.4 and 1512.5 [2018 and 2015 Sections 1511.5 and 1511.6 (2012, 2009 and 2006 Sections 1510.5 and 1510.6)].
- IRC: 2021, 2018 and 2015 Section R908.5 and R908.6 (2012, 2009 and 2006 Sections R907.5 and R907.6).

#### 4.3 Wind Resistance:

GAF asphalt shingles have been tested for wind resistance in accordance with ASTM D3161 or ASTM D7158. Shingles tested in accordance with ASTM D3161 are classified as Class F and qualify for use under 2021 IBC Section 1504.2 [2018 and 2015 IBC Section 1504.1.1 (2012 and 2009 IBC Section 1507.2.7.1 and 2006 IBC 1504.1.1)] or IRC Section R905.2.4.1, as applicable. Shingles tested in accordance with ASTM D7158 are classified as Class H and qualify for use in locations where the maximum basic wind speed is 150 mph (67 m/s) or less with an exposure category of B or C (ASCE 7) and a maximum building height of 60 feet (18.3 m). Installation must be in accordance with 2021 and 2018 IBC Section 1507.2.6 (2015, 2012, 2009 and 2006 IBC Section 1507.2.7) or IRC Section R905.2.6, as applicable.

#### 5.0 CONDITIONS OF USE

The GAF asphalt shingle roof covering systems described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The shingles must be manufactured, identified, and installed in accordance with the applicable codes, this report, and the manufacturer's published installation instructions. In the event of a conflict between this report and the manufacturer's published installation instructions, this report governs.
- 5.2 Installation must be in accordance with Section 4.0 of this report.
- 5.3 The GAF shingle products are manufactured at the locations noted in Table 1, under a quality control program with inspections by ICC-ES.

#### 6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Alternative Asphalt Roofing Shingles (AC438), dated June 2017 (editorially revised July 2022).

#### 7.0 IDENTIFICATION

- 7.1 The ICC-ES mark of conformity, electronic labeling or the evaluation report number (ESR-3267) along with the name, registered trademark, or registered logo of the report holder must be included in the product label.
- 7.2 In addition, the GAF asphalt shingles are identified by each bundle of shingles must bear a label with the name and address of the GAF manufacturing plant location; the product name; the roof classification (Class A); the installation instructions; the evaluation report number (ESR-3267); and a reference indicating compliance with ASTM D3161 Class F or ASTM D7158, Class H, as applicable.

Additionally, each bundle of shingles must be marked with the area of roof surface covered and the style, type and color of the product.

- 7.3 The report holder's contact information is the following:

**GAF**  
**1 CAMPUS DRIVE**  
**PARSIPPANY, NEW JERSEY 07054**  
**(877) 423-7663**  
[www.gaf.com](http://www.gaf.com)

TABLE 1—GAF SHINGLES – PRODUCT DESCRIPTIONS AND MANUFACTURING LOCATIONS

SHINGLE	SHINGLE TYPE	PLANT LOCATION	DIMENSIONS (height x width) (inches)	MAXIMUM EXPOSURE TO THE WEATHER (inches)	LOCATION OF NAIL LINE <sup>1</sup> (inches)	WIND RESISTANCE CLASSIFICATION
Royal Sovereign®	Three-tab	Fontana, CA	13 <sup>1</sup> / <sub>4</sub> x 39 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	6	ASTM D3161, Class F ASTM D7158, Class H
		Dallas, TX Minneapolis, MN Mt. Vernon, IN Myerstown, PA Savannah, GA Tampa, FL Tuscaloosa, AL	12 x 36	5	5 <sup>5</sup> / <sub>8</sub>	ASTM D3161, Class F ASTM D7158, Class H
Marquis WeatherMax®	Three-tab	Mt. Vernon, IN	12 x 36	5	5 <sup>5</sup> / <sub>8</sub>	ASTM D3161, Class F ASTM D7158, Class H
Slateline®	Five-tab	Mt. Vernon, IN	17 x 40	7 <sup>1</sup> / <sub>2</sub>	9	ASTM D3161, Class F ASTM D7158, Class H
Camelot® II	Laminated	Mt. Vernon, IN	17 x 34 <sup>1</sup> / <sub>2</sub>	7 <sup>1</sup> / <sub>2</sub>	8 <sup>1</sup> / <sub>2</sub>	ASTM D3161, Class F ASTM D7158, Class H
Grand Canyon®	Laminated	Fontana, CA Mt. Vernon, IN	17 x 40	5	11	ASTM D3161, Class F ASTM D7158, Class H
Grand Sequoia®	Laminated	Fontana, CA Mt. Vernon, IN	17 x 40	5	11	ASTM D3161, Class F ASTM D7158, Class H
Grand Sequoia® AS, Grand Sequoia® ArmorShield®	Laminated	Fontana, CA	17 x 40	5	11	ASTM D3161, Class F ASTM D7158, Class H
Timberline® ArmorShield® II,	Laminated	Ennis, TX Shafter, CA Fontana, CA	13 <sup>1</sup> / <sub>4</sub> x 39 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	6	ASTM D3161, Class F ASTM D7158, Class H
Timberline® AS II	Laminated	Ennis, TX Shafter, CA Fontana, CA	13 <sup>1</sup> / <sub>4</sub> x 39 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	5 <sup>7</sup> / <sub>8</sub> - 7 <sup>5</sup> / <sub>8</sub>	ASTM D3161, Class F ASTM D7158, Class H
Timberline® Natural Shadow®, Timberline® NS	Laminated	Baltimore, MD Dallas, TX Ennis, TX Fontana, CA Michigan City, IN Minneapolis, MN Myerstown, PA Shafter, CA Tampa, FL Tuscaloosa, AL	13 <sup>1</sup> / <sub>4</sub> x 39 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	6	ASTM D3161, Class F ASTM D7158, Class H

For SI: 1 inch = 25.4 mm, 1 lb/100 ft<sup>2</sup> = 0.0488 kg/m<sup>2</sup>.

TABLE 1—GAF SHINGLES – PRODUCT DESCRIPTIONS AND MANUFACTURING LOCATIONS (Continued)

SHINGLE	SHINGLE TYPE	PLANT LOCATION	DIMENSIONS (height x width) (inches)	MAXIMUM EXPOSURE TO THE WEATHER (inches)	LOCATION OF NAIL LINE <sup>1</sup> (inches)	WIND RESISTANCE CLASSIFICATION
Timberline® HDZ™ Timberline® UHDZ™	Laminated	Baltimore, MD Dallas, TX Ennis, TX Fontana, CA Michigan City, IN Minneapolis, MN Myerstown, PA Shafter, CA Tampa, FL Tuscaloosa, AL	13 <sup>1</sup> / <sub>4</sub> x 39 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	5 <sup>7</sup> / <sub>8</sub> – 7 <sup>5</sup> / <sub>8</sub>	ASTM D3161, Class F ASTM D7158, Class H
Timberline® Cool Series®	Laminated	Fontana, CA	13 <sup>1</sup> / <sub>4</sub> x 39 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	6	ASTM D3161, Class F ASTM D7158, Class H
Timberline® CS	Laminated	Fontana, CA	13 <sup>1</sup> / <sub>4</sub> x 39 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	5 <sup>7</sup> / <sub>8</sub> – 7 <sup>5</sup> / <sub>8</sub>	ASTM D3161, Class F ASTM D7158, Class H
Timberline Ultra HD®, Timberline® UHD	Laminated	Baltimore, MD Dallas, TX Ennis, TX Fontana, CA Michigan City, IN Minneapolis, MN Myerstown, PA Shafter, CA Tampa, FL Tuscaloosa, AL	13 <sup>1</sup> / <sub>4</sub> x 39 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	6	ASTM D3161, Class F ASTM D7158, Class H
Timberline® AH	Laminated	Fontana, CA Michigan City, IN Myerstown, PA Tuscaloosa, AL	13 <sup>1</sup> / <sub>4</sub> x 39 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	5 <sup>7</sup> / <sub>8</sub> – 7 <sup>5</sup> / <sub>8</sub>	ASTM D3161, Class F ASTM D7158, Class H
Timberline® American Harvest®	Laminated	Fontana, CA Michigan City, IN Myerstown, PA Tuscaloosa, AL	13 <sup>1</sup> / <sub>4</sub> x 39 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	6	ASTM D3161, Class F ASTM D7158, Class H
Fortitude®	Laminated	Myerstown, PA	13 <sup>1</sup> / <sub>4</sub> x 39 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	5 <sup>7</sup> / <sub>8</sub> – 7 <sup>5</sup> / <sub>8</sub>	ASTM D3161, Class F ASTM D7158, Class H
Woodland®	Laminated	Mt. Vernon, IN	17 x 40	6 <sup>1</sup> / <sub>2</sub> - 7 <sup>1</sup> / <sub>2</sub>	8	ASTM D3161, Class F ASTM D7158, Class H
Timberline Solar HDZ™	Laminated	Mt. Vernon, IN	17 <sup>1</sup> / <sub>8</sub> x 40	7 <sup>9</sup> / <sub>16</sub>	7 <sup>13</sup> / <sub>16</sub> – 9 <sup>9</sup> / <sub>16</sub>	ASTM D3161, Class F ASTM D7158, Class H

For SI: 1 inch = 25.4 mm, 1 lb/100 ft<sup>2</sup> = 0.0488 kg/m<sup>2</sup>.

<sup>1</sup>Nail line = distance from lowermost edge of shingle to target nail location. See Figure 1.

TABLE 2—ACCESSORY PRODUCTS – PRODUCT DESCRIPTIONS AND MANUFACTURING LOCATIONS

SHINGLE	SHINGLE TYPE	PLANT LOCATION	DIMENSIONS (height x width) (inches)	MAXIMUM EXPOSURE TO THE WEATHER (inches)
Ridglass® Premium Ridge Cap Shingles	Hip and Ridge	Fontana, CA	10 x 23 pieces	8
TimberCrest® Premium SBS-Modified Ridge Cap Shingles	Hip and Ridges	Fontana, CA	10 x 24 pieces	8
Royal Sovereign®	Hip and Ridge	Fontana, CA	13 <sup>1</sup> / <sub>4</sub> x 39 <sup>3</sup> / <sub>8</sub> strip 13 <sup>1</sup> / <sub>4</sub> x 9 <sup>7</sup> / <sub>8</sub> pieces	See Footnote <sup>1</sup>
		Dallas, TX Minneapolis, MN Mt. Vernon, IN Myerstown, PA Savannah, GA Tampa, FL Tuscaloosa, AL	12 x 36 strip 12 x 12 pieces	See Footnote <sup>1</sup>
Seal-A-Ridge® Ridge Cap Shingles	Hip and Ridge	Savannah, GA Mount Vernon, IN	12 x 36 strip 12 x 12 pieces	6 <sup>2</sup> / <sub>3</sub>
Seal-A-Ridge® AS SBS-Modified IR Ridge Cap Shingles	Hip and Ridge	Savannah, GA	12 x 36 strip 12 x 12 pieces	5
Timber Tex® Premium Ridge Cap Shingles	Hip and Ridge	Mt. Vernon, IN	12 x 36 strip 12 x 12 pieces	8
Z®Ridge Ridge Distinctive Cap Shingles	Hip and Ridge	Shafter, CA	13 <sup>1</sup> / <sub>4</sub> x 39 <sup>1</sup> / <sub>2</sub> strip 13 <sup>1</sup> / <sub>4</sub> x 9 <sup>7</sup> / <sub>8</sub> pieces	5 <sup>5</sup> / <sub>8</sub>
Pro-Start® Starter Strip Shingles	Starter Strip	Mt. Vernon, IN Dallas, TX	13 x 38 strip 6 <sup>1</sup> / <sub>2</sub> x 38 pieces	N/A
		Shafter, CA	13 <sup>1</sup> / <sub>4</sub> x 38 strip 6 <sup>5</sup> / <sub>8</sub> x 38 pieces	N/A
StarterMatch® Starter Strip Shingles StarterMatch® Complimentary Color Starter Strip Shingles	Starter Strip	Fontana, CA	13 <sup>1</sup> / <sub>4</sub> x 40 strip	N/A
WeatherBlocker™ Premium Starter Strip Shingles	Starter Strip	Mt. Vernon, IN	17 x 40 strip 8 <sup>1</sup> / <sub>2</sub> x 40 pieces	N/A

For SI: 1 inch = 25.4 mm, 1 lb/100 ft<sup>2</sup> = 0.0488 kg/m<sup>2</sup>.

<sup>1</sup>Weather exposure must not exceed that permitted for the field of the roof.



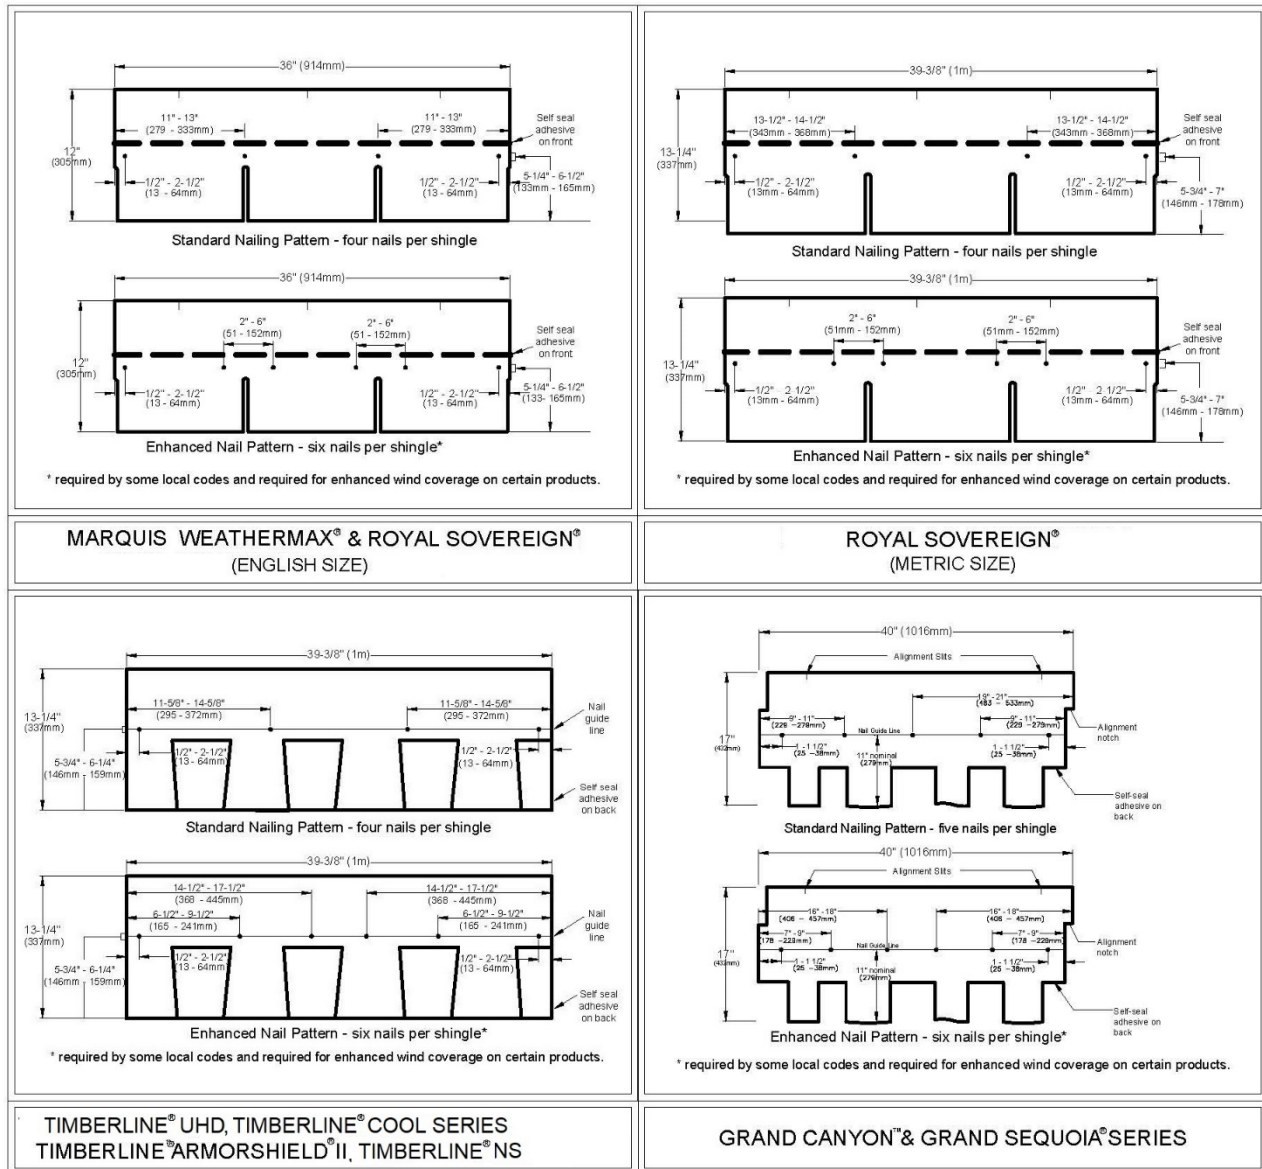


FIGURE 1—GAF SHINGLES

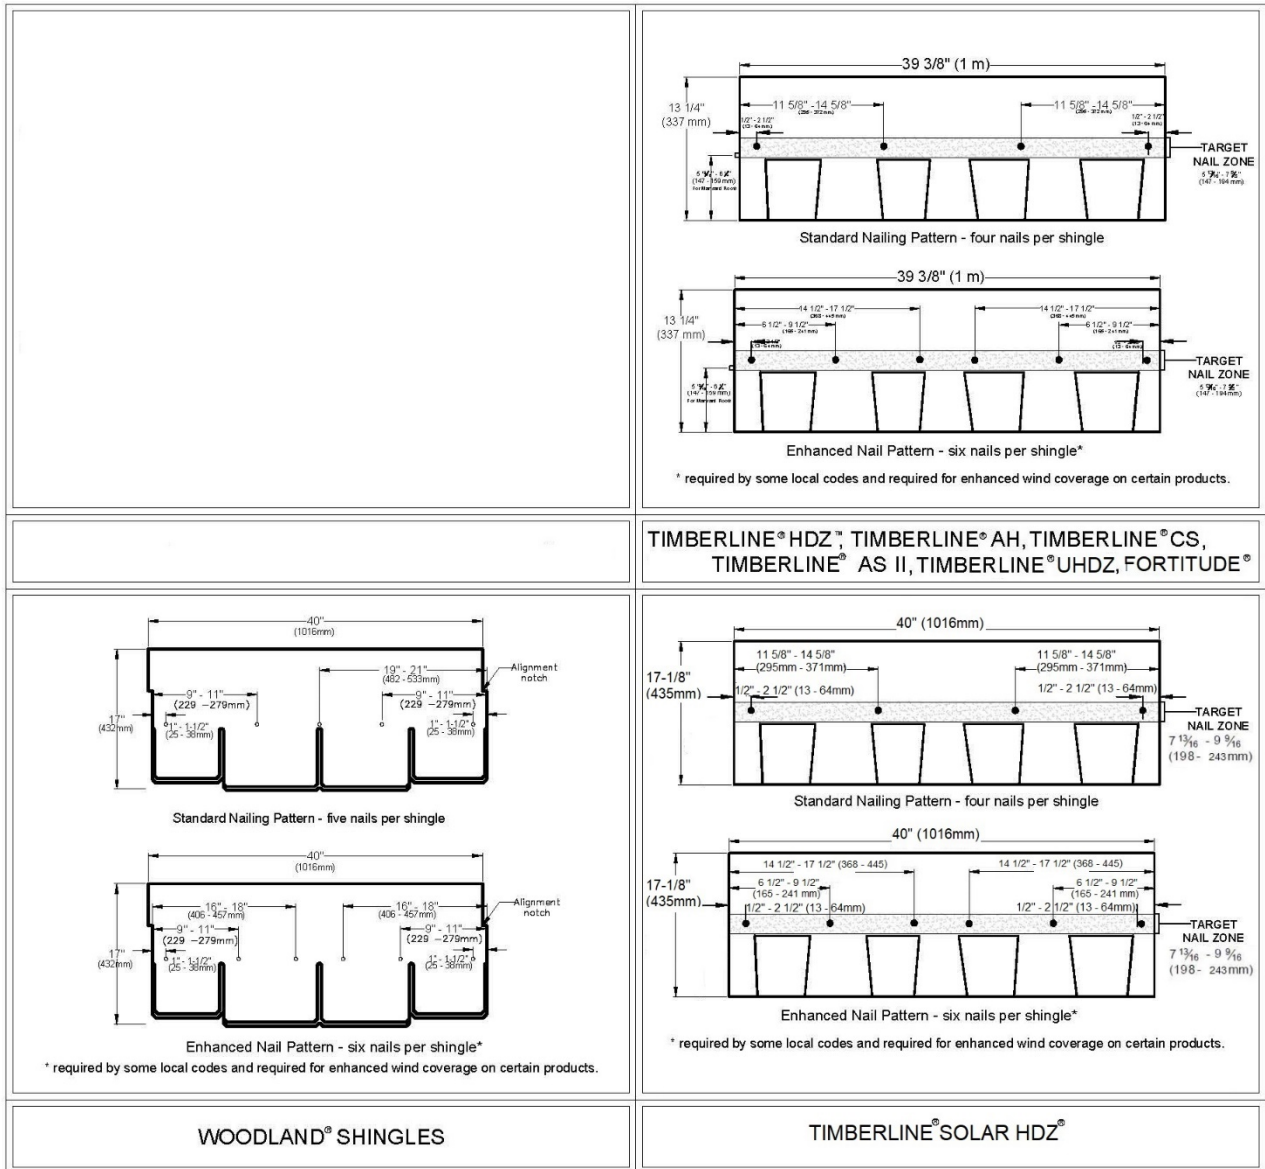


FIGURE 1—GAF SHINGLES (Continued)



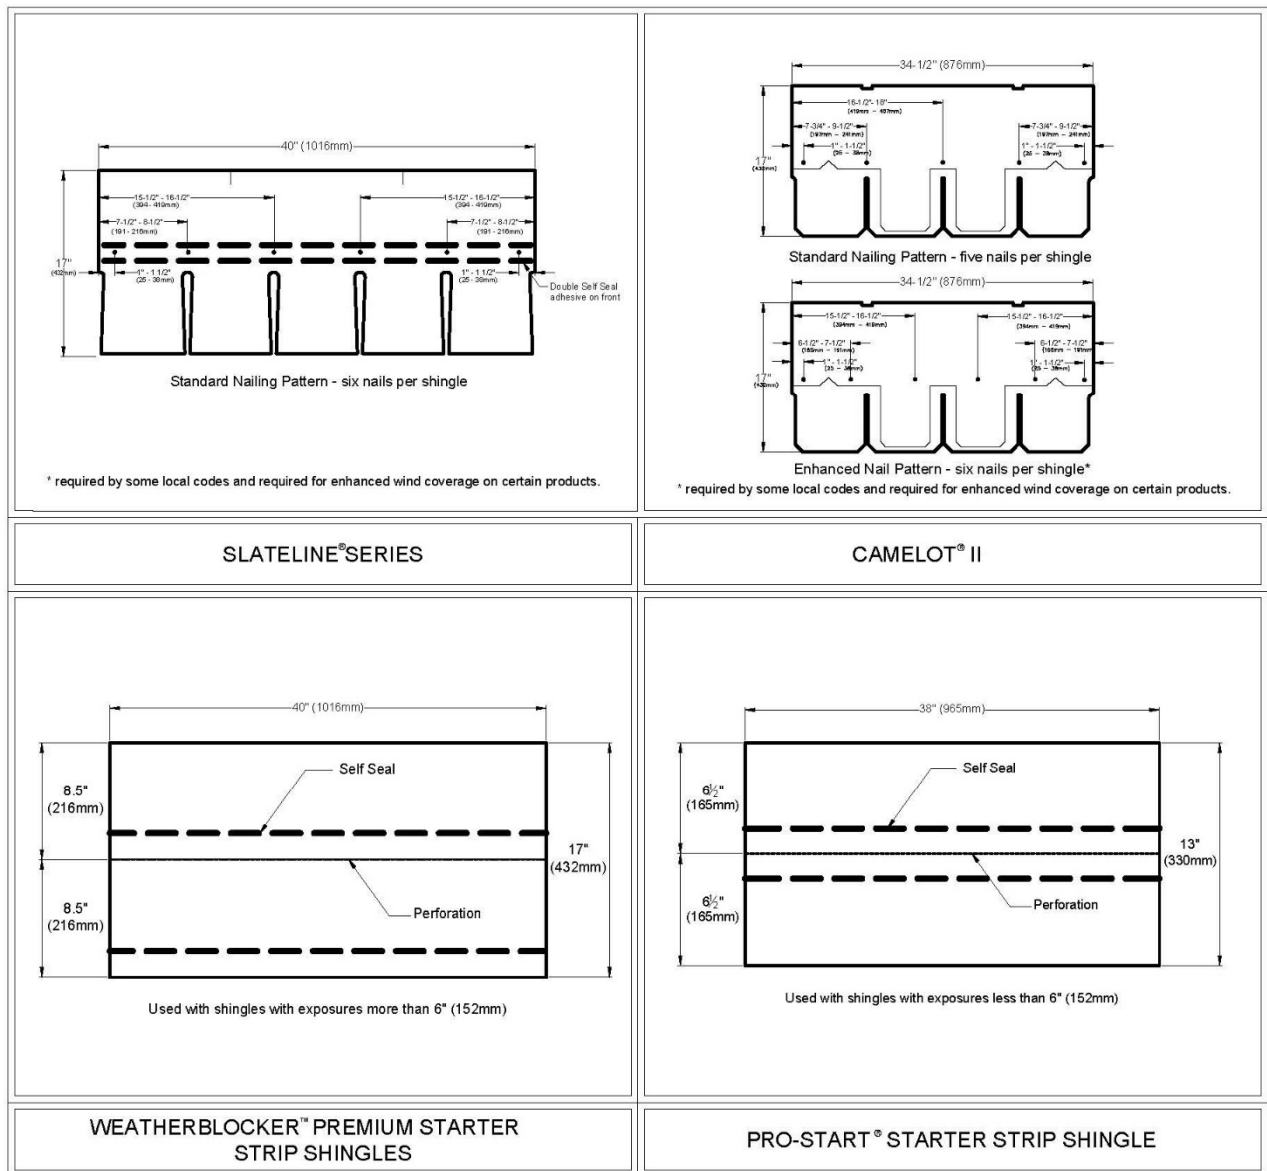


FIGURE 1—GAF SHINGLES (Continued)

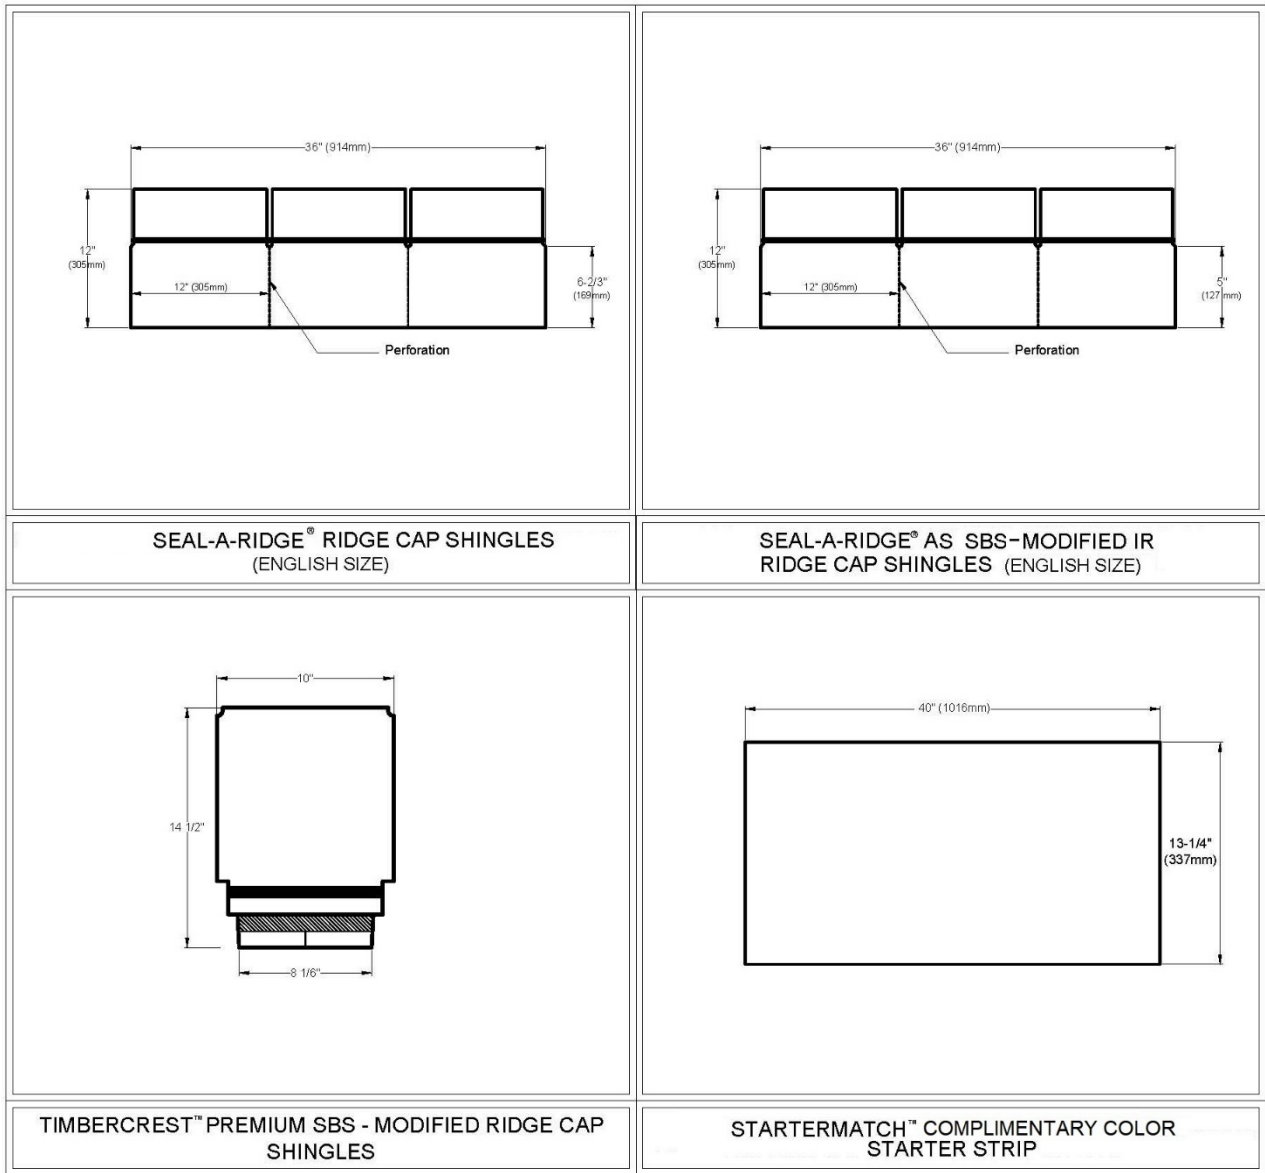


FIGURE 2—STARTER AND RIDGE SHINGLES

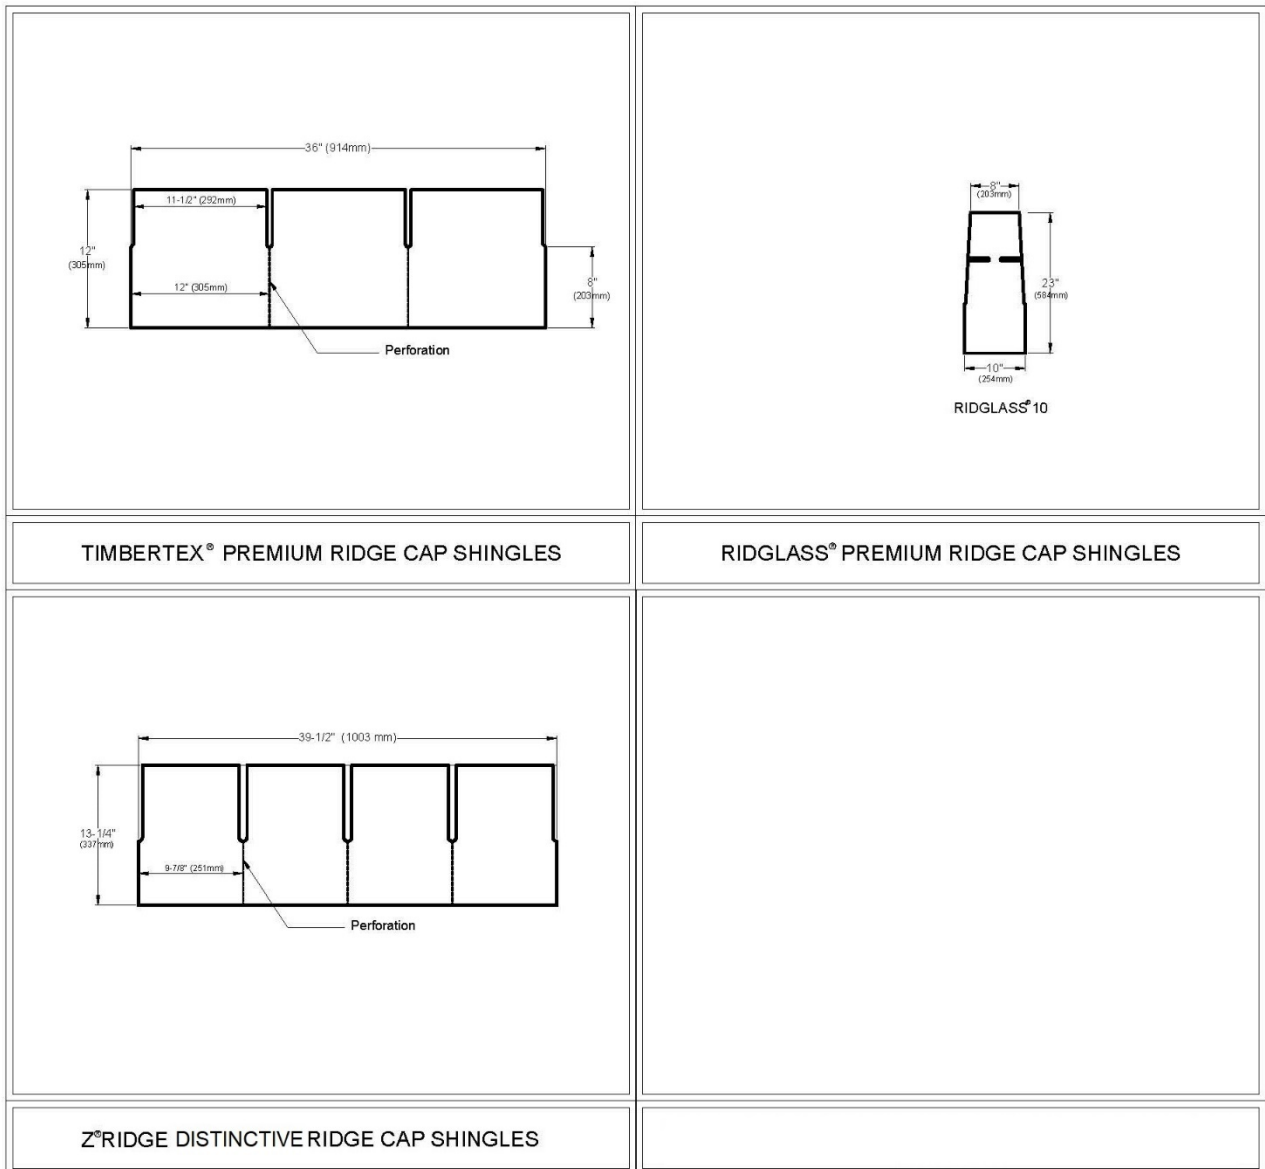


FIGURE 3—RIDGE AND STARTER SHINGLES

DIVISION: 07 00 00—THERMAL AND MOISTURE PROTECTION

Section: 07 31 13—Asphalt Shingles

## REPORT HOLDER:

GAF

## EVALUATION SUBJECT:

GAF SHINGLE ROOF COVERING SYSTEMS

## 1.0 REPORT PURPOSE AND SCOPE

## Purpose:

The purpose of this evaluation report supplement is to indicate that GAF shingle roof covering systems, described in ICC-ES evaluation report ESR-3267, has also been evaluated for compliance with the code(s) noted below.

## Applicable code editions:

- 2022 California Building Code® (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) and Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

- 2022 California Residential Code® (CRC)

## 2.0 CONCLUSIONS

## 2.1 CBC:

The GAF shingle roof covering systems, described in Sections 2.0 through 7.0 of the evaluation report ESR-3267, comply with CBC Sections 1505.1 and 1507.2, and may be used where the CBC requires a Class A roof covering complying with CBC Section 1505.1.1, a Class B roof covering complying with CBC Section 1505.3, or a Class C roof covering complying with CBC Section 1505.2, provided the design and installation are in accordance with the 2021 *International Building Code*® (IBC) provisions respectively, noted in the evaluation report and the additional requirements of CBC Section 1512, as applicable.

The asphalt shingles may be used in the construction of new buildings located in any Fire Hazard Severity Zone within a State Responsibility Areas or any Wildland-Urban Interface Fire Area, provided installation is in accordance with the 2021 *International Building Code*® (IBC) provisions, as applicable, noted in the evaluation report and the additional requirements of Sections 701A.3 and 705A of the CBC.

## 2.1.1 OSHPD:

The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.

## 2.1.2 DSA:

The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

## 2.2 CRC:

The GAF shingle roof covering systems, described in Sections 2.0 through 7.0 of the evaluation report ESR-3267, comply with CRC Sections R902.1 and R905.2, and may be used where the CRC requires a Class A roof cover complying with CRC Section R902.1.1, a Class B roof covering complying with CRC Section R902.3, or a Class C roof covering complying with CRC Section R902.1.2, provided the design and installation are in accordance with the 2021 *International Residential Code*® (IRC) provisions respectively, noted in the evaluation report and the additional requirements of CRC Section R908, as applicable.

The asphalt shingles may be used in the construction of new buildings located in any Fire Hazard Severity Zone within a State Responsibility Areas or Wildland-Urban Interface Fire Area, provided installation is in accordance with the 2021 *International Residential Code*® (IRC) provisions, as applicable, noted in the evaluation report and the additional requirements of Sections R337.1.3 and R337.5 of the CRC.

The products included in this supplement have not been evaluated for compliance with the *International Wildland-Urban Interface Code*®

This supplement expires concurrently with the evaluation report, reissued December 2021, revised November 2022.