

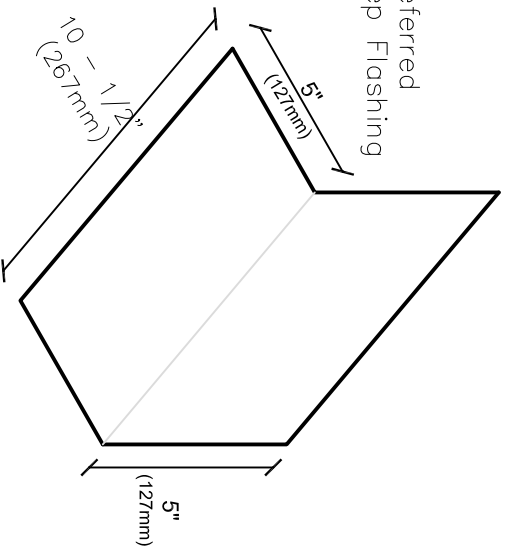


Preferred Step Flashing

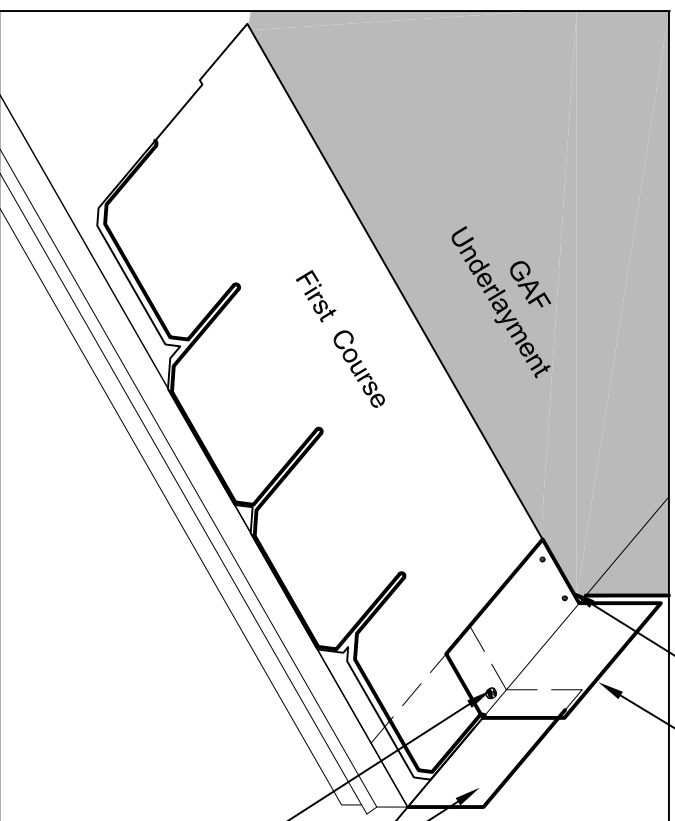

Alternate 2 piece Step Flashing

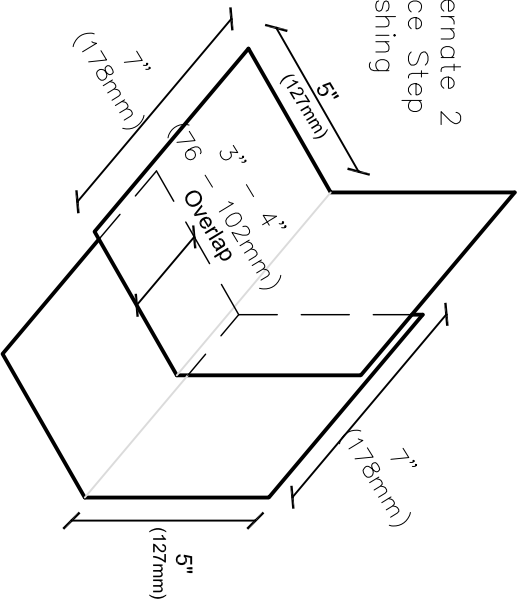

2 nails as shown
1" – 2" (25–
51mm) from top

Install step
flashing to fully
cover top half of
each shingle using
preferred or
alternate method
to left

First course of
step flashing
under shingle as
shown

Set next shingle
in a quarter-sized
dab of plastic
cement



1 Campus Drive
Parisippany, NJ 07054
www.gaf.com

BRAND SERIES
WOODLAND
SERIES
Lifetime Shingles

REVISION DATE
10-30-17

SCALE
N.T.S

STEP FLASHING DETAIL

05

DETAIL NUMBER
SS-WLD