


Extend non-corroding metal counter flashing over base flashing.

Use one piece metal non-corroding step flashing for each course. Seal overlying shingles to step flashing with asphalt plastic cement.



At least 4"  
(102mm)

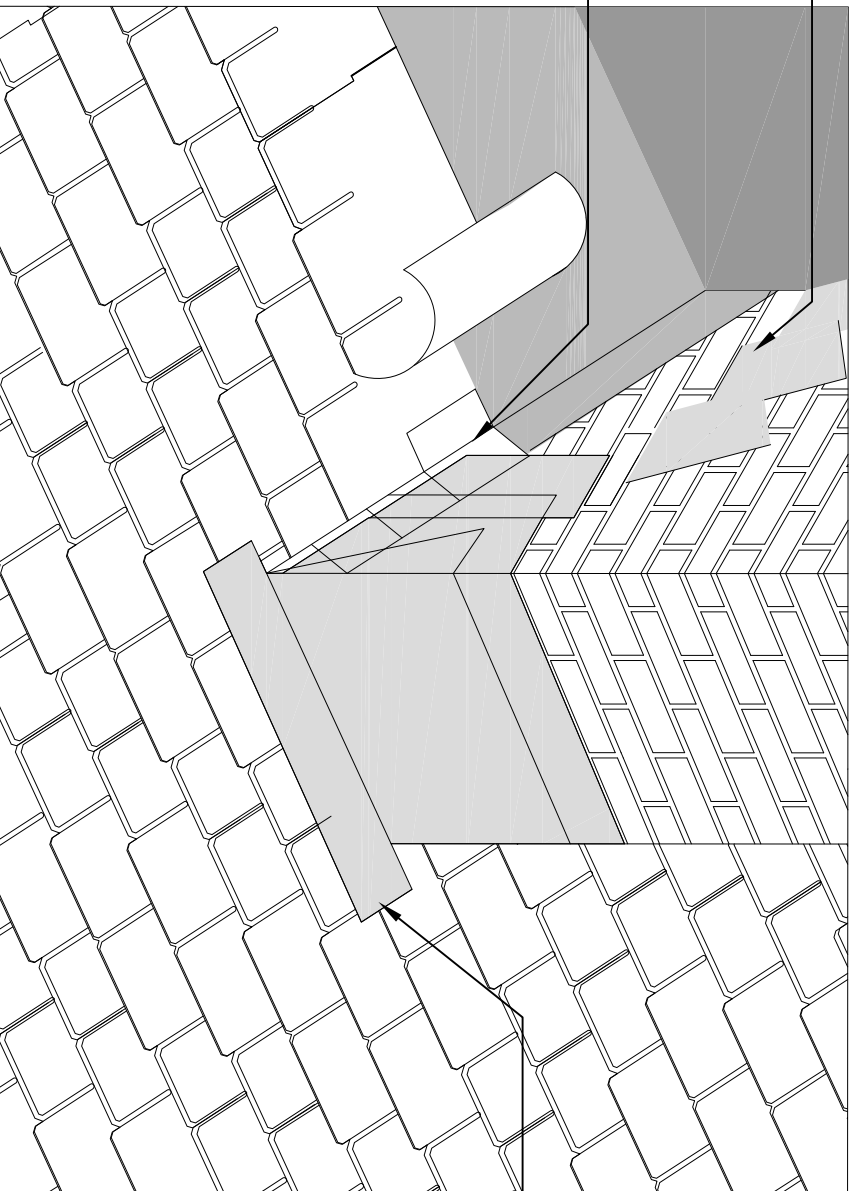

1 Campus Drive  
Parsippany, NJ 07054  
www.gaf.com

BRAND SERIES  
**WOODLAND**  
**SERIES**  
Lifetime Shingles

REVISION DATE  
10-30-17

SCALE  
N.T.S

**CHIMNEY FLASHING DETAIL**

**07**

DETAIL REFERENCE  
**SS-WLD**