


TIE-IN WITH VYCOR enV-S:

1. RIPCORD® HAS BEEN REMOVED AT SILL FOR EASE OF INSTALLATION AND/OR COORDINATION OF OTHER TRADES
2. INSTALL GRACE VYCOR FLASHING HEAD FLASHING OVER VYCOR enV-S
3. APPLY GRACE S100 OR COMPATIBLE SEALANT TO TOP LEADING EDGE OF HEAD FLASHING AND ALL NON WATER SHEDDING EDGES

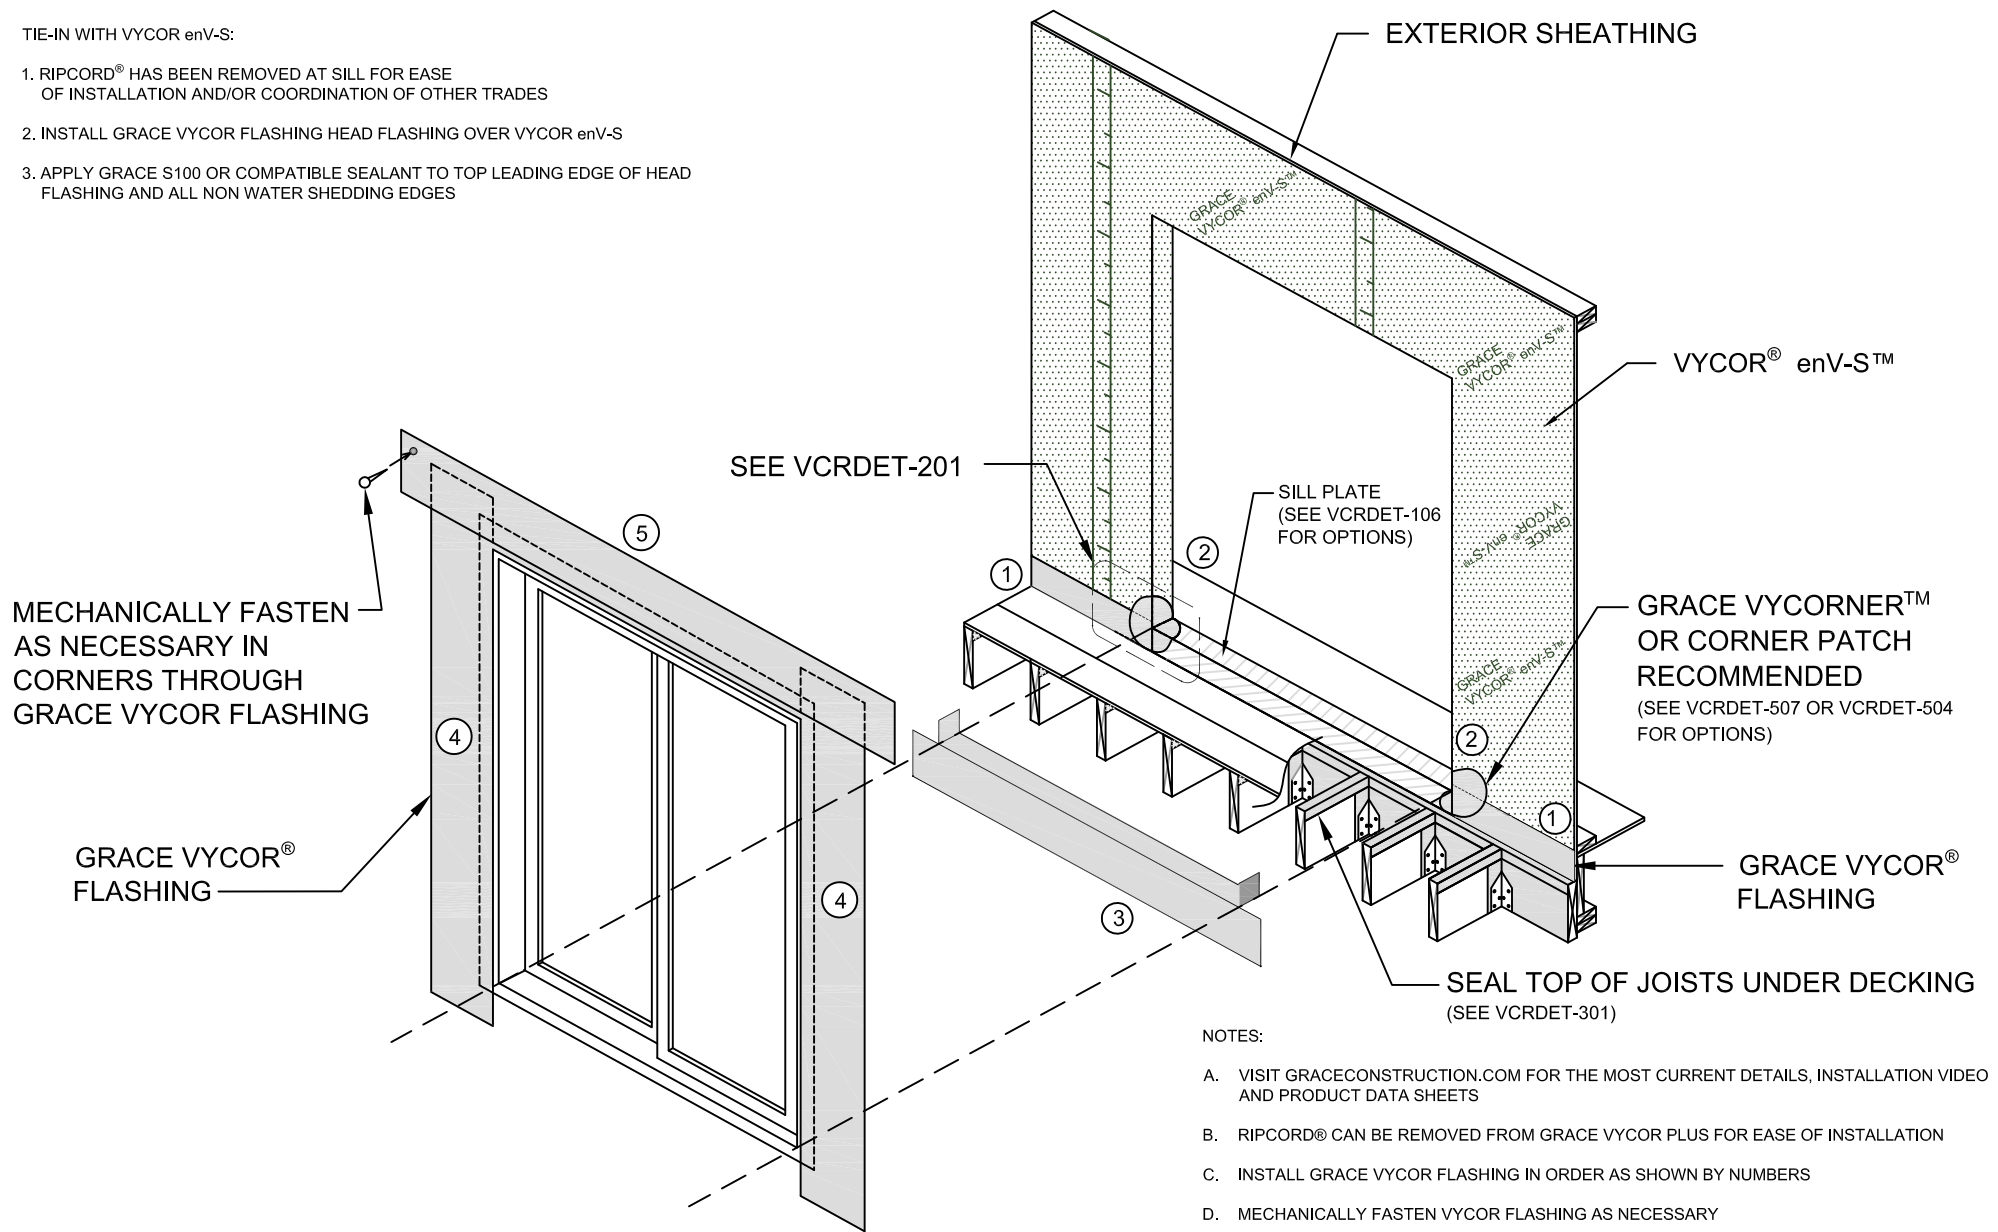

NOTES:

- A. VISIT GRACECONSTRUCTION.COM FOR THE MOST CURRENT DETAILS, INSTALLATION VIDEO AND PRODUCT DATA SHEETS
- B. RIPCORD® CAN BE REMOVED FROM GRACE VYCOR PLUS FOR EASE OF INSTALLATION
- C. INSTALL GRACE VYCOR FLASHING IN ORDER AS SHOWN BY NUMBERS
- D. MECHANICALLY FASTEN VYCOR FLASHING AS NECESSARY
- E. DETAIL RELEVANT FOR ALL GRACE VYCOR FLASHINGS
- F. INSTALL VYCOR enV-S VERTICALLY OR HORIZONTALLY TO FORM WATER SHEDDING LAPS

**GRACE**  
Construction Products  
www.graceconstruction.com  
toll free 866-333-3726

**EXTERIOR SLIDING DOOR WITH DECK  
FLASHING INSTALLATION AFTER VYCOR® enV-S™  
GRACE VYCOR® SELF-ADHERED FLASHING**

**Drawing: VCRENVS-200**

**Scale: Not to scale**

**Effective Date: 05/01/14**

**Supersedes: NEW**