

# RapidStrength\*

## Silicone bedding sealant

### Stronger windows. Better bottom lines.


GE RapidStrength sealant is for the construction of residential and commercial doors or windows, in window wall applications and for the fabrication and shop glazing of curtainwall modules, offering a fast green strength and a deep-section cure profile for increased productivity and efficiency.

- **Durability** - 100% silicone, resistant to weathering, UV exposure and extreme temperatures
- **Fast green strength** - productivity and processing advantages with typical snap times between 6 and 12 minutes, with a thorough deep section cure
- **Variable ratio capability** - control snap times, cure speed and strength development through volume mix ratio
- **Primerless adhesion** - bonds to most conventional substrates and finishes
- **Cold applied**- apply at room temperature with common mixing/dispensing equipment with low cost, disposable, static mixers

Meets ASTM C1184 Specification for structural sealants and offers increased safety factors in SSG designs. Proven performance in hurricane code window designs

Colors: translucent, white, black, gray and beige

RapidStrength RGS7700 Silicone Elastomeric Adhesive  
Strength Build-Rate @ 10 to 1 Volume Mix Ratio

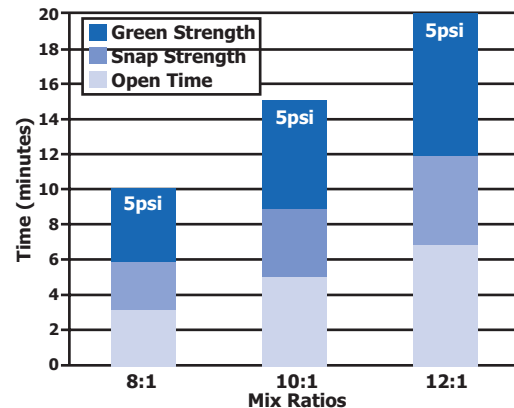

Technical Services: 1-800-255-8886

Customer Service: 1-877-943-7325



Exclusive  
Licensee