



# "WET LOOK" 2000 LACQUER

**EXPOSED AGGREGATE • STAMPED CONCRETE • POROUS BRICK  
NATURAL POROUS STONE • SALTILLO TILE • STUCCO • CONCRETE  
ADOQUIN/CANTERA • INTERLOCKING PAVERS • FLAGSTONE**



## PRODUCT DESCRIPTION

A revolutionary Low-VOC crystal clear acrylic coating designed to protect and beautify concrete, masonry and tile surfaces. This super-tough firm gives a rich "Wet Look", resists chemicals, abrasion and stains. It is suitable for interior and exterior use.

"WET LOOK" 2000 utilizes the same resin system and Glaze 'N Seal's original Lacquer, thereby providing the same dependable performance. It contains low VOC solvents creating an environmentally responsible formula.

## USES


Protects garage floors and driveways from oil stains. Eliminates concrete dusting and freeze-thaw problems. Protects patio and barbecue areas from food and grease stains. Saturation with Glaze 'N Seal will actually harden old and deteriorating mortar and plaster for added life. Independent laboratory tests rate Glaze 'N Seal superior for abrasion resistance, sunlight resistance and stain resistance qualities.

## SPECIAL NOTES

"WET LOOK" 2000 is fully compatible with Glaze 'N Seal original Lacquer and may be used over it for recoating purposes.

"WET LOOK" 2000 complies with most strict Air Quality Management District Requirements (except SCAQMD).

"WET LOOK" 2000 has improved coverage up to 15-20% greater than other formulas. Adjust application accordingly with thin, even coats.

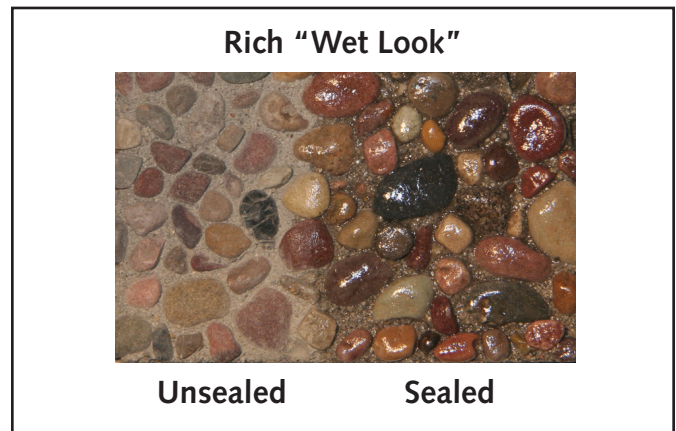

**Quality Products for Concrete, Tile and Masonry**

Glaze 'N Seal Products, Irvine, CA • 800/486-1414  
www.glaze-n-seal.com

## "WET LOOK" 2000 FEATURES

- Non-Yellowing • Use Indoors or Outdoors
- Fast Drying and Long Lasting • Apply with Brush or Sprayer
- Prevents Staining • High Solids • Low VOC's
- Strong Resistance to Efflorescence

### PREPARATIONS

All surfaces must be free of efflorescence, dirt, oil, wax, grease and defective paint or sealers. If acid is used, all residue must be removed prior to application. Use Glaze 'N Seal Neutralizing Rinse to neutralize surface. Allow to dry thoroughly before applying "WET LOOK" 2000.

### APPLICATION

Apply 2-4 light, even coats (depending on porosity of surface) with a natural brush or low-pressure/airless sprayer (with metal or teflon tip).

Do not allow product to puddle.

Allow 1-3 hours between coats, 24 hours before light use. Apply in temperatures between 55°F and 80°F. Avoid using in direct sunlight. Use only in ventilated areas.

**Helpful Hint:** Use lacquer thinner or acetone for easy clean up.

**IMPORTANT:** Product contains petroleum distillates. Read product label carefully or consult with dealer for more detailed preparation, application and caution information.

### MAINTENANCE

To protect the sealer and extend the life (indoors), use Glaze 'N Seal Floor Polish (regular or matte finish) as a traffic coat. Sweep and damp mop floor frequently.

Outdoors, remove oil spills and contaminants promptly. Occasionally wash down patio or driveway with water.

If needed, also use a Glaze 'N Seal cleaner for improved cleaning results (they will not harm the "Wet Look" sealer).

### SPECIAL NOTES

Always test a small area of surface to verify protection and appearance. NOT RECOMMENDED for glazed tile, marble, dense brick or dense slate. If in doubt, test surface. **Do not** use where hydrostatic pressure is possible.

### SPECIFICATIONS

COLOR . . . . . CLEAR  
ODOR . . . . . SWEET  
GLASS TRANSITION RATE . . . . . +50°  
DENSITY . . . . . 7.7 lbs.  
TUKON HARDNESS . . . . . 12-13  
COVERAGE  
    First coat . . . . . 125 to 500 sq. ft./gal.  
    Second coat . . . . . 50% greater than first  
DRYING TIME (at 68°F, 50% RH)  
    Dry to touch . . . . . 1/2-2 hours  
    Recoat . . . . . 2-3 hours  
    Open to Light Traffic . . . . . 24 hours  
    Open to Heavy Traffic . . . . . 2-3 days  
LEVELING . . . . . Excellent  
DRY TIME . . . . . 1 hour  
FLASH POINT . . . . . 37°F  
APPLICATION TEMP . . . . . 50°F to 80°F  
CHEMICAL RESISTANCE . . . . . Excellent

### "WET LOOK" 2000 LACQUER PACKAGING

Package Size	Prod. #	lbs./cs.	UPC
6/gallon	103	51	10734 33340
5-gallon pail	104	45	10734 33342
55-gallon drum	105	490	10734 33343



## Quality Products for Concrete, Tile and Masonry

Glaze 'N Seal Products, Irvine, CA • 800/486-1414  
www.glaze-n-seal.com

FS 66-4/10