

Light Gauge Metal (20-25)**Product #210****Scavenger® Head Fastener (1 OF 2)**

Attaches gypsum board to 25-20 ga. steel. Unique Scavenger® head helps reduce paper burrs.

Finish - Black/Gray Phosphate



Scavenger
Head



23° Streaker®
Point



#2 Phillips
Drive

APPLICATIONS

- ▶ 1/2" to 5/8" single-layer gypsum board to 20 – 25 gauge steel studs and runners
- ▶ 1/2" and 5/8" double-layer gypsum boards to 20 –
- ▶ 25 gauge steel studs, runners, furring, and Z furring channels
- ▶ 1" coreboard to metal angle runners in solid partition

PRODUCT FEATURES

- ▶ Unique head configuration helps eliminate paper burrs and aids proper seating of fasteners. A fine thread screw for general interior applications 15 threads per inch
- ▶ Super sharp, 23° STREAKER® point, designed to penetrate steel quickly and easily
- ▶ #2 Phillips recess drive

SPECIFICATIONS

- ▶ Gauge – #6
- ▶ Lengths – 1" to 1-5/8"
- ▶ Head Type – SCAVENGER®
- ▶ Recess Type – #2 Phillips
- ▶ Thread Type – Double Lead
- ▶ Finish – Gray Phosphate
- ▶ GRABBER® screws are manufactured in an ISO 9001 and ISO 14001 certified.

INSTALLATION GUIDELINES

- ▶ Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance – 4 amps minimum and RPM range of 0 to 4,000.
- ▶ The SCAVENGER® head is fully seated when the head is flush with the work surface.
- ▶ Overdriving may result in failure of fastener or strip out of the work surface.
- ▶ The fastener must penetrate beyond the metal three full thread pitches.

Light Gauge Metal (20-25)

Product #210

Scavenger® Head Fastener (2 OF 2)

PRODUCT SIZES AND ORDERING INFORMATION

Catalog No.	Gauge/Length	Length Metric	Quantity Per Carton	Weight Per Carton
168S	#6x1"	25 mm	10 M	28.00(lbs)
368S	#6x1-1/4"	32 mm	8 M	30.00(lbs)
268S	#6x1-1/8"	28 mm	10 M	32.00(lbs)
468S	#6x1-5/8"	41 mm	5 M	22.00(lbs)

*1lb Box and 5lb Box screw packaging option available on selected items.

PRODUCT DIMENSIONS (MILLIMETERS)

Gauge	B Head Dia	Recess Depth	W Gauging Width	d Shank Dia	d1 Minor Dia	d2 Major Dia	TPI
#6	8.00	0.50	#2	2.68	2.27	3.45	15
	8.50	0.80		2.72	2.42	3.58	


PULL-OUT TEST DATA

Screw Gauge	Metal Gauge	Tension (lbs.)	Shear (lbs.)
#6	20	237	557
	25	139	278

**GRABBER® fasteners are not categorized as structural bolts. The figures listed above are ultimate average values achieved under independent laboratory conditions, and apply to GRABBER Line fasteners only. An appropriate safety factor must be determined by a qualified professional for design purposes.

STANDARD CORROSION TEST RESULTS

Finish	Test	Standard/Protocol	Results
Black/Gray Phosphate	Salt Spray Results	ASTM B117	24 hours, No Red Rust

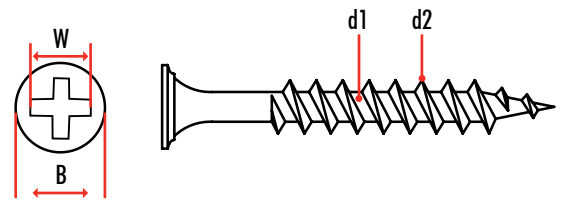

All GRABBER® screw products are manufactured in facilities that are ISO 9001 certified. The fasteners comply with ASTM C1002 performance requirements. ©2012 GRABBER Construction Products, Inc. GRABBER®, STREAKER®, DRIVALL®, LOX®, GRABBERGARD® and SCAVENGER® are registered trademarks of Grabber Construction Products, Inc.

