


INTERIOR WOOD

Product #230S

Scavenger® Head GRABBER® - Interior (1 OF 3)

Attaches gypsum board to wood. Extra sharp point and threads make driving easier and provide better holding power.

Finish - Black/Gray Phosphate

Scavenger
HeadGRABBER
Point#2 Phillips
Drive**APPLICATIONS**

- ▶ 3/8", 1/2", and 5/8" single-layer gypsum board to wood studs and joists
- ▶ 1/2" and 5/8" double-layer gypsum board to wood studs and joists
- ▶ Insulation to wood

SPECIFICATIONS

- ▶ Gauge – #6 to #10
- ▶ Lengths – 1" to 4"
- ▶ Head Type – Scavenger®
- ▶ Recess Type – #2 Phillips
- ▶ Thread Type – Single Lead
- ▶ Finish – Gray Phosphate.
- ▶ GRABBER® screws are manufactured in an ISO 9001 and ISO 14001 certified and approved factory.

PRODUCT FEATURES

- ▶ Superior holding power and ease of penetration
- ▶ A coarse thread screw for general interior applications
- ▶ 8 threads per inch
- ▶ Extra sharp, single lead 23° GRABBER point, designed to penetrate quickly and easily
- ▶ #2 Phillips recess drive
- ▶ Unique Scavenger® head is designed to reduce paper burrs

INSTALLATION GUIDELINES

- ▶ Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance – 4 amps minimum and 2500 RPM.
- ▶ The Scavenger® head is fully seated when the head is flush with the work surface.
- ▶ Overdriving may result in failure of the fastener or stripout of the work surface.

INTERIOR WOOD

Product #230S

Scavenger® Head GRABBER® - Interior (2 OF 3)

PRODUCT SIZES AND ORDERING INFORMATION

| Catalog No. | Gauge/Length | Length Metric | Quantity Per Carton | Weight Per Carton |
|-------------|--------------|---------------|---------------------|-------------------|
| 108 | #6x1" | 25 mm | 10 M | 29.00(lbs) |
| 308 | #6x1-1/4" | 32 mm | 8 M | 30.00(lbs) |
| 408 | #6x1-5/8" | 41 mm | 5 M | 22.00(lbs) |
| 508 | #7x2" | 51 mm | 3.5 M | 21.00(lbs) |


*1lb Box and 5lb Box screw packaging option available on selected items.

STANDARD CORROSION TEST RESULTS

| Finish | Test | Standard/Protocol | Results |
|----------------------|--------------------|-------------------|-----------------------|
| Black/Gray Phosphate | Salt Spray Results | ASTM B117 | 24 hours, No Red Rust |

PRODUCT DIMENSIONS (MILLIMETERS)

| Gauge | B Head Dia | Recess Depth | W Gauging Width | d Shank Dia | d1 Minor Dia | d2 Major Dia | TPI |
|-------|------------|--------------|-----------------|-------------|--------------|--------------|-----|
| #6 | 8.00 | 0.50 | #2 | 2.68 | 2.25 | 3.75 | 8 |
| | 8.50 | 0.80 | | 2.72 | 2.45 | 3.95 | |
| #7 | 8.00 | 0.50 | #2 | 2.93 | 2.50 | 4.05 | 8 |
| | 8.50 | 0.80 | | 2.97 | 2.80 | 4.30 | |

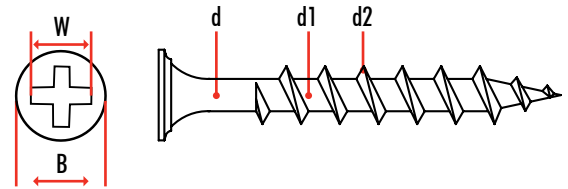

PULL-OUT TEST DATA

| Screw Gauge | 2x2 Douglas Fir | 2x4 Redwood | 1x3 Clear Pine | 1" Plywood | 3/4" Particleboard |
|-------------|-----------------|-------------|----------------|------------|--------------------|
| #6 | 339 | 309 | 186 | 222 | 224 |
| #7 | 430 | 258 | 291 | 250 | 227 |

All GRABBER® screw products are manufactured in facilities that are ISO 9001 certified. The fasteners comply with ASTM C1002 performance requirements. ©2012 GRABBER Construction Products, Inc. GRABBER®, STREAKER®, DRIVALL®, LOX®, GRABBERGARD® and SCAVENGER® are registered trademarks of Grabber Construction Products, Inc.

