

Cement Board


Product #268

GRABBER® Cement Board Screws Self Drilling (1 OF 2)



Designed for Cement Board

Finish - GRABBERGARD

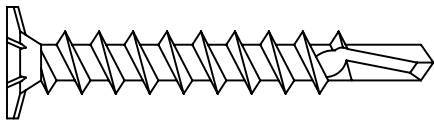

Wafer Head



Drill Point



#2 Phillips Drive

APPLICATIONS

- ▶ Cement board to Metal

PRODUCT FEATURES

- ▶ Exterior-grade corrosion resistant coating
- ▶ Wafer head with nibs to facilitate seating and minimize strip out
- ▶ Head diameter - .40 inch
- ▶ #2 Phillips recess drive

SPECIFICATIONS

- ▶ Gauge - #8, #10
- ▶ Length – 1-1/4" to 3-1/2"
- ▶ Head Type – Thin Wafer
- ▶ Recess Type – #2 Phillips
- ▶ Thread Type – Single Lead
- ▶ Finish – GRABBERGARD
- ▶

INSTALLATION GUIDELINES

- ▶ Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance – 4 amps minimum and RPM range of 0 to 2,500.
- ▶ Install with head flush with board, no need to counter sink.
- ▶ Overdriving may result in failure of the fastener or stripout of the work surface.

Cement Board

Product #268

GRABBER® Cement Board Screws Self Drilling (2 OF 2)

PRODUCT SIZES AND ORDERING INFORMATION

Catalog No.	Gauge/Length	Length Metric	Quantity Per Carton	Weight Per Carton
GCB8125SD	#8x1-1/4"	32 mm	5 M	37.00(lbs)
GCB8158SD	#8x1-5/8"	41 mm	4 M	31.00(lbs)
GCB8238SD	#8x2-3/8"	60 mm	3 M	30.00(lbs)
GCB10350SD	#10x3-1/2"	89 mm	1 M	23.00(lbs)

*1lb Box and 5lb Box screw packaging option available on selected items.


STANDARD CORROSION TEST RESULTS

Finish	Test	Standard/Protocol	Results
GRABBERGARD®	Salt Spray Results	ASTM B117	1,000 hours, no red rust
GRABBERGARD®	Kesternich Results	DIN 50018, 2.0L	15 cycles, no red rust

Pull-out and Shear Test Data**

Screw Gauge	Metal Gauge	Tension (lbs.)	Shear (lbs.)
#8	14	646	1457
	16	513	1031
	18	283	733
	20	217	493

**GRABBER fasteners are not categorized as structural bolts. The figures listed above are ultimate average values based on AISI S100-16 J4, and apply to GRABBER fasteners only. An appropriate safety factor must be determined by a qualified professional for design purposes.

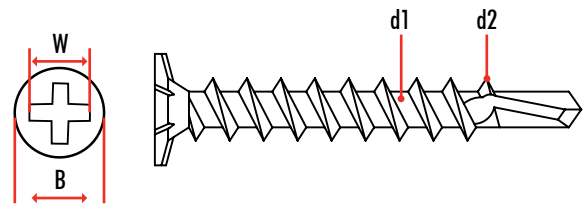

DRILLING CAPACITY

Screw Gauge	Drill Point	Max Panel Thickness	Steel Thickness Gauge Range
8	3	0.100-0.140	20-12

All GRABBER® screw products are manufactured in facilities that are ISO 9001 and ISO 14001 certified and approved. The fasteners comply with ASTM C1513. GRABBER®, STREAKER®, DRIVALL®, LOX®, GRABBERGARD® and SCAVENGER® are registered trademarks of Grabber Construction Products, Inc.