

# Acrylitex<sup>®</sup> Vapor Prime Interior Vapor Barrier

**Acrylitex Vapor Prime for use on interior walls. Vapor Prime is a non-breathing latex primer sealer applied in a production spray application which seals the wall with a perm rating of less than 1.0 in one coat. Acrylitex Vapor Prime replaces conventional vapor barrier methods such as plastics and paper-faced insulation.**


#### For use on interior walls & ceilings

Non-breathing latex primer sealer

Seals the wall with perm rating of less than 1.0



Our liability is expressly limited to the replacement of defective product.

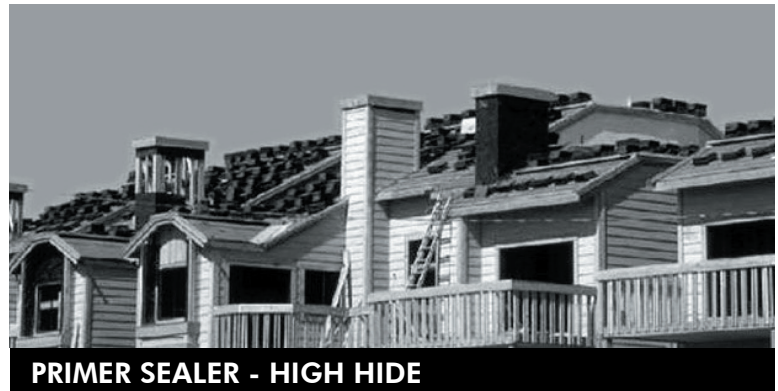

#### Coverage

320 sq. ft. per gal. when applied at 5 wet mils. Coverage rates will vary with mil thickness, applicator technique and type of spray tip (amount of fallout).

#### Recommended Mil Rate

Apply a minimum of 5 wet mils to achieve a less than 1.0 perm rating. Average dry time is 1/2 hour. Dry time to recoat is 2 hours.

#### Packaging

Available in 5 gallon and 55 gallon containers and 275 gallon totes.

#### Colors

Available in one color – White.

#### Application

May be applied with airless sprayer. Product is bucket ready. No thinning necessary. Use at temperatures above 50 degrees F. Brush off dust or dirt on the wall. Surfaces must be clean, dry, sound and properly cured. Respirator not required but recommended. Apply as you would any primer.

#### Cleanup

Clean tools and equipment with soapy water prior to drying.